




COMPACT DESIGN

**FLOOD
LED**

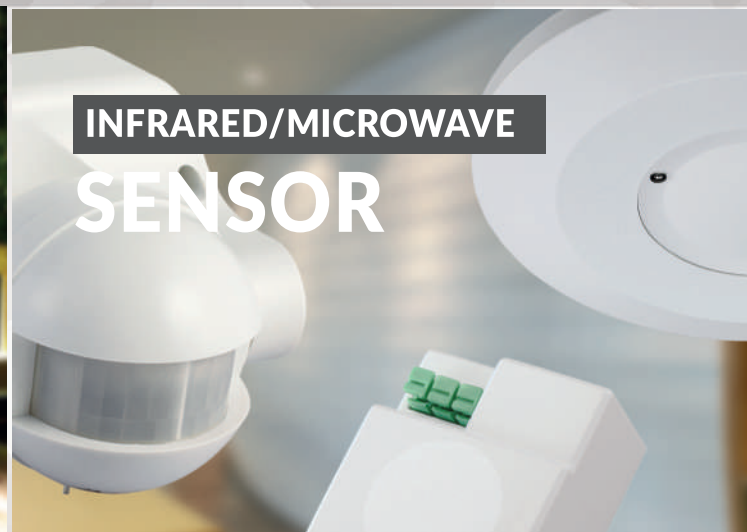

INFRARED/MICROWAVE

SENSOR



LED LAMP

A60

DIMMABLE SWITCHING
COLOR SWITCHING
RGB COLOR



COMPACT DESIGN

**HIGHBAY
LED**



BODY ALUMINIUM

**SOCKET GROUND
LED**



COMPACT DESIGN

**DOWNLIGHT
LED**



INDEX PAGE

1

FLOOD LED



5

SOCKET GROUND



6

HIGHBAY LED



7

RG SERIE LED



10

DOWNLIGHT LED



16

A60 LED



17

SENSOR



FLOOD LED



10 WATT

FL-10BC 3.000K



195-265V
50-60HZ

NO
DIMMABLE

1.000
LUMEN

30.000h
LIFESPAN

IP65
PROTECTION
CLASS

120°
BEAM ANGLE




Measures.
335mm x 315mm x 205mm

This Outer Box Contains.
36 pcs



8056039330504

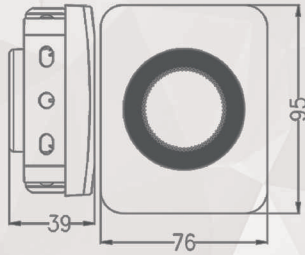

10 WATT

FL-10BD 5.000K



195-265V
50-60HZ

NO
DIMMABLE

1.000
LUMEN

30.000h
LIFESPAN

IP65
PROTECTION
CLASS

120°
BEAM ANGLE




Measures.
335mm x 315mm x 205mm

This Outer Box Contains.
36 pcs



8056039330511

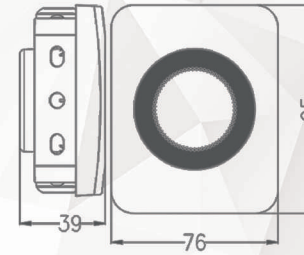

20 WATT

FL-20BC 3.000K



195-265V
50-60HZ

NO
DIMMABLE

2.000
LUMEN

30.000h
LIFESPAN

IP65
PROTECTION
CLASS

120°
BEAM ANGLE




Measures.
410mm x 260mm x 235mm

This Outer Box Contains.
30 pcs



8056039330528



20 WATT

FL-20BD 5.000K



195-265V
50-60HZ

NO
DIMMABLE

2.000
LUMEN

30.000h
LIFESPAN

IP65
PROTECTION
CLASS

120°
BEAM ANGLE




Measures.
410mm x 260mm x 235mm

This Outer Box Contains.
30 pcs



8056039330535





30 WATT

FL-30BC 3.000K



195-265V
50-60HZ



NO
DIMMABLE



3.000
LUMEN



30.000h
LIFESPAN



IP65
PROTECTION
CLASS



120°
BEAM ANGLE





Measures.
570mm x 335mm x 150mm

This Outer Box Contains.
20 pcs



8056039330542

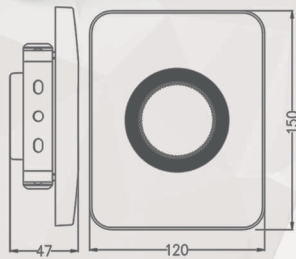

30 WATT

FL-30BD 5.000K



195-265V
50-60HZ



NO
DIMMABLE



3.000
LUMEN



30.000h
LIFESPAN



IP65
PROTECTION
CLASS



120°
BEAM ANGLE




Measures.
570mm x 335mm x 150mm

This Outer Box Contains.
20 pcs



8056039330559

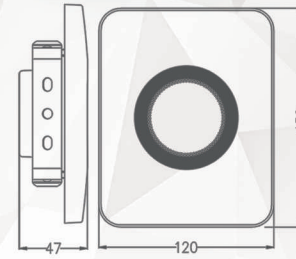

50 WATT

FL-50BC 3.000K



195-265V
50-60HZ



NO
DIMMABLE



5.000
LUMEN



30.000h
LIFESPAN



IP65
PROTECTION
CLASS



120°
BEAM ANGLE




Measures.
410mm x 350mm x 175mm

This Outer Box Contains.
12 pcs



8056039330566

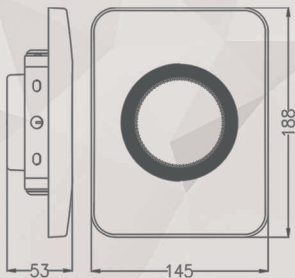

50 WATT

FL-50BD 5.000K



195-265V
50-60HZ



NO
DIMMABLE



5.000
LUMEN



30.000h
LIFESPAN



IP65
PROTECTION
CLASS



120°
BEAM ANGLE





Measures.
410mm x 350mm x 175mm

This Outer Box Contains.
12 pcs



8056039330573

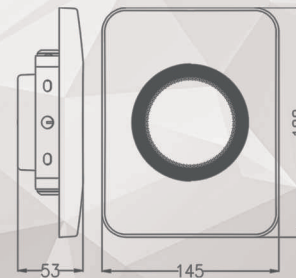

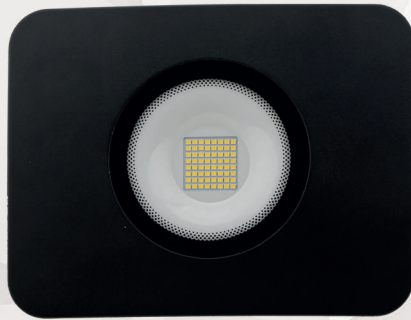

70 WATT

FL-70BC 3.000K



195-265V
50-60HZ



NO
DIMMABLE



7.000
LUMEN




30.000h
LIFESPAN



IP65
PROTECTION
CLASS




120°
BEAM ANGLE

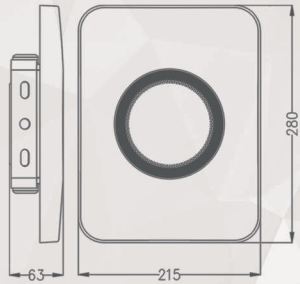

Measures.
415mm x 306mm x 246mm
This Outer Box Contains.
5 pcs



8056039330580

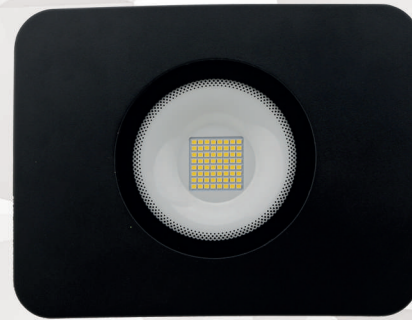

70 WATT

FL-70BD 5.000K



195-265V
50-60HZ



NO
DIMMABLE



7.000
LUMEN




30.000h
LIFESPAN



IP65
PROTECTION
CLASS




120°
BEAM ANGLE

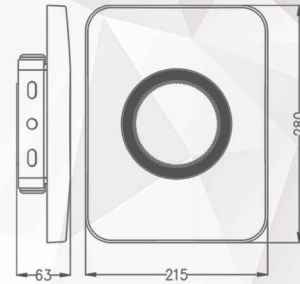

Measures.
415mm x 306mm x 246mm
This Outer Box Contains.
5 pcs



8056039330597

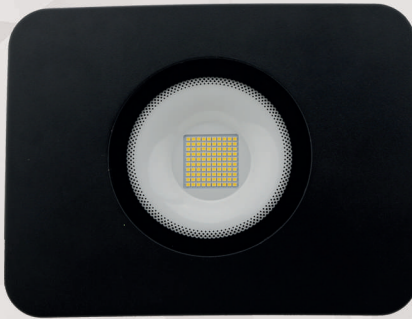

100 WATT

FL-100BC 3.000K



195-265V
50-60HZ



NO
DIMMABLE



10.000
LUMEN




30.000h
LIFESPAN



IP65
PROTECTION
CLASS




120°
BEAM ANGLE

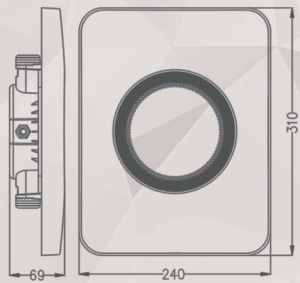

Measures.
335mm x 260mm x 270mm
This Outer Box Contains.
3 pcs



8056039330603

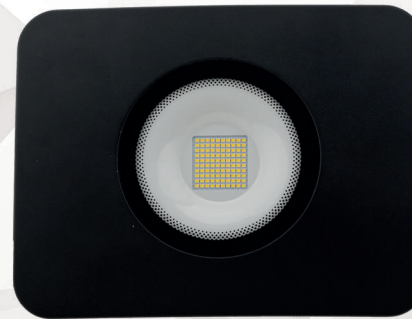

100 WATT

FL-100BD 5.000K



195-265V
50-60HZ



NO
DIMMABLE



10.000
LUMEN




30.000h
LIFESPAN



IP65
PROTECTION
CLASS



120°
BEAM ANGLE

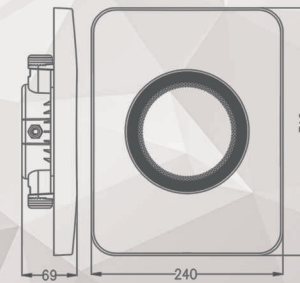

Measures.
335mm x 260mm x 270mm
This Outer Box Contains.
3 pcs



8056039330610






FLS-10BD 5.000K 10 WATT

- 195-265V**
50-60HZ
- NO DIMMABLE**
- 3-5 MT DISTANCE**
- 1.000 LUMEN**
- 20.000h LIFESPAN**
- 2.5-3.5 Min TIME DELAY**
- IP65 PROTECTION CLASS**
- 120° BEAM ANGLE**
- 100° DETECTION RANGE**



Measures.
410mm x 260mm x 235mm
This Outer Box Contains.
30 pcs




FLS-30BD 5.000K 30 WATT

- 195-265V**
50-60HZ
- NO DIMMABLE**
- 4-6 MT DISTANCE**
- 3.000 LUMEN**
- 20.000h LIFESPAN**
- 2.5-3.5 Min TIME DELAY**
- IP65 PROTECTION CLASS**
- 120° BEAM ANGLE**
- 100° DETECTION RANGE**



Measures.
570mm x 335mm x 150mm
This Outer Box Contains.
20 pcs


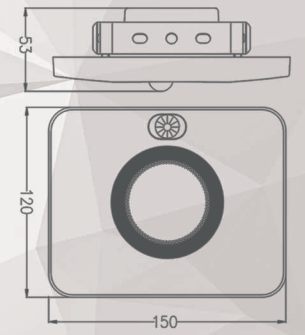



FLS-50BD 5.000K 50 WATT

- 195-265V**
50-60HZ
- NO DIMMABLE**
- 5-8 MT DISTANCE**
- 5.000 LUMEN**
- 20.000h LIFESPAN**
- 2.5-3.5 Min TIME DELAY**
- IP65 PROTECTION CLASS**
- 120° BEAM ANGLE**
- 100° DETECTION RANGE**



Measures.
410mm x 350mm x 175mm
This Outer Box Contains.
12 pcs

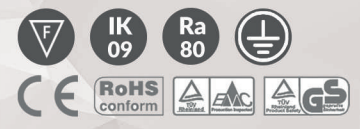


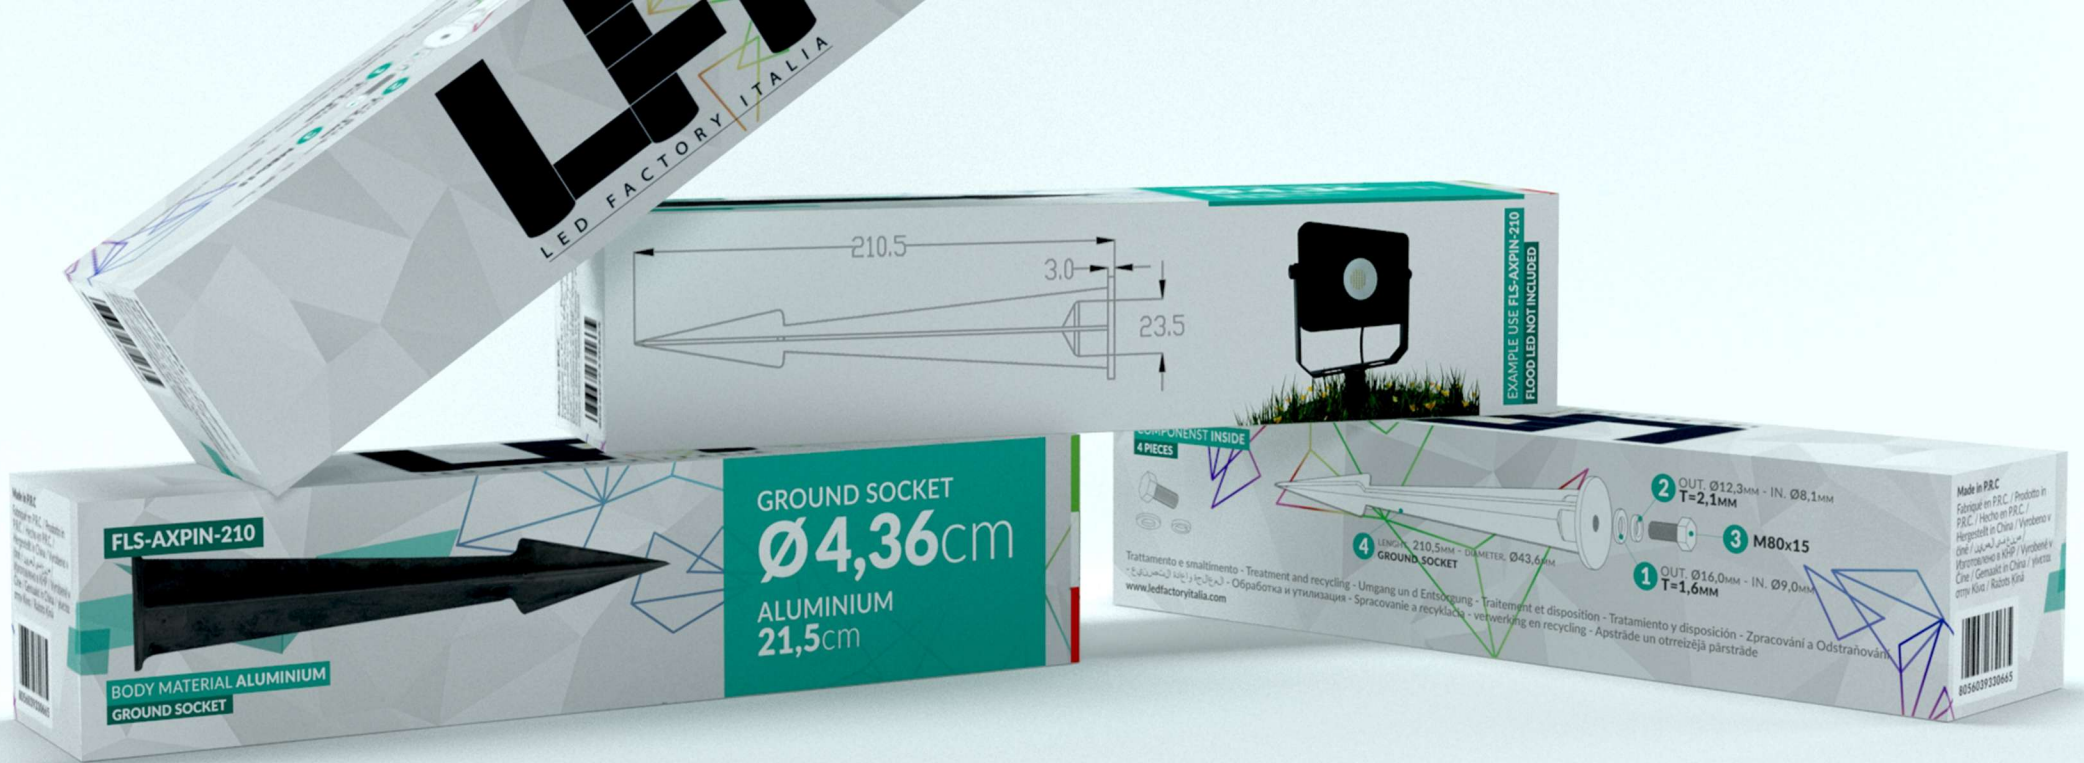

FLS-AXPIN-210



**BODY MATERIAL ALUMINIUM
GROUND SOCKET**

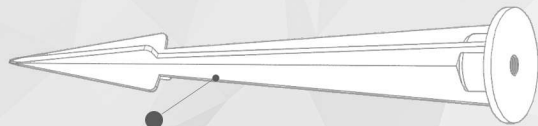

LENGHT. 210,5MM - DIAMETER. Ø43,6MM



8056039330665



Measures.
460mm x 270mm x 270mm
This Outer Box Contains.
50 pcs

FLS-AXPI-170



**BODY MATERIAL ALUMINIUM
GROUND SOCKET**



LENGHT. 170,0MM - DIAMETER. Ø43,5MM



8056039330658



Measures.
380mm x 270mm x 270mm
This Outer Box Contains.
50 pcs

HIGHBAY LED





100 WATT

SM-BAY100D 5.000K

- 220-240V 50-60HZ
- NO DIMMABLE
- 8.000 LUMEN
- 30.000h LIFESPAN
- IP44 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. **680mm x 350mm x 300mm**
This Outer Box Contains. **4 pcs**



8056039331228

- IK 09
- Ra 80
-

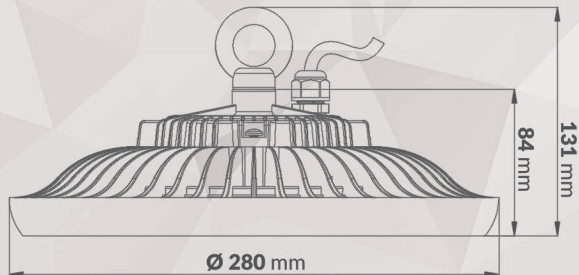

150 WATT

SM-BAY150D 5.000K

- 220-240V 50-60HZ
- NO DIMMABLE
- 12.000 LUMEN
- 30.000h LIFESPAN
- IP44 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. **410mm x 410mm x 320mm**
This Outer Box Contains. **2 pcs**



8056039331235

- IK 09
- Ra 80
-

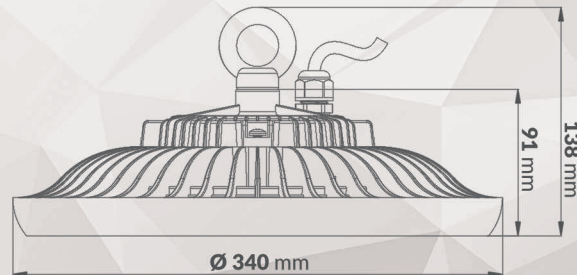

200 WATT

SM-BAY200D 5.000K

- 220-240V 50-60HZ
- NO DIMMABLE
- 16.000 LUMEN
- 30.000h LIFESPAN
- IP44 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. **470mm x 470mm x 330mm**
This Outer Box Contains. **2 pcs**



8056039331242


- IK 09
- Ra 80
-

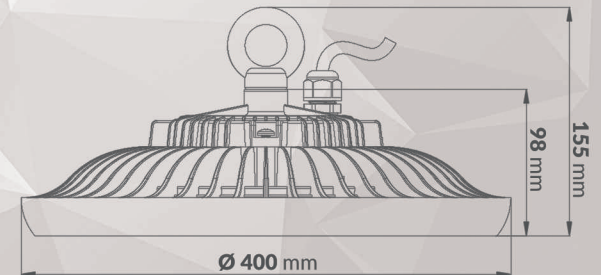






RG SERIES

LED



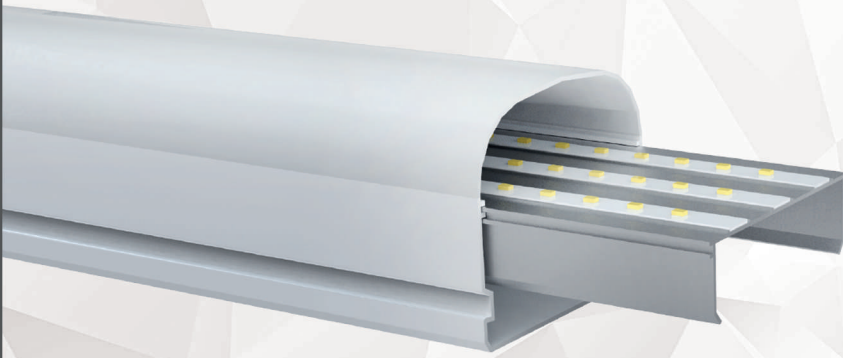

IP 65
IK 08

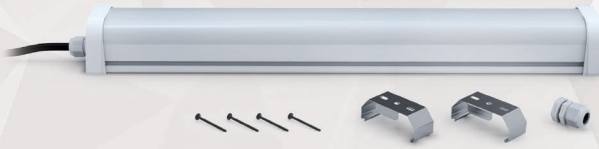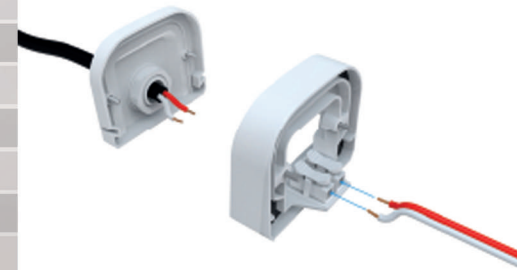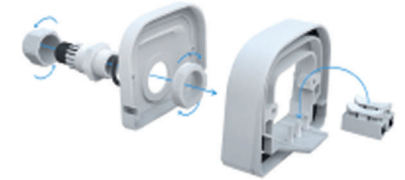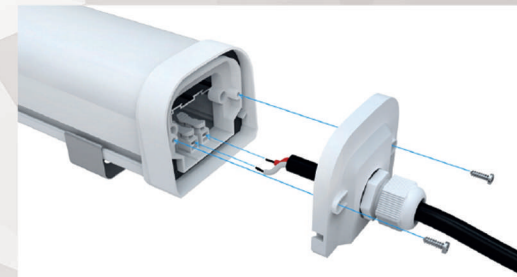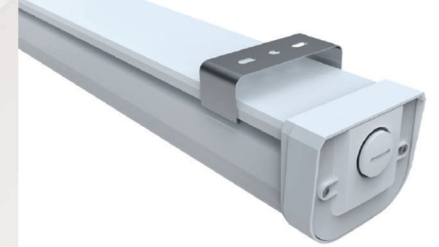

20
WATT



TRI-6020C

COLOR TEMPERATURE 3.000K



TRI-6020D

COLOR TEMPERATURE 4.200K



TRI-6020F

COLOR TEMPERATURE 6.400K

175-250V
50-60HZ



108
LED Q.TY



CLASS II
ELECTRIC



250°
FIELD ANGLE



30.000h
LIFESPAN





220°
BEAM ANGLE

LUMEN	1.800 lm	LUMEN	1.800 lm	LUMEN	1.900 lm
CRI	Ra80	CRI	Ra83	CRI	Ra84
DIMMABLE	NO	DIMMABLE	NO	DIMMABLE	NO
WARM-UP TIME	<0,5s	WARM-UP TIME	<0,5s	WARM-UP TIME	<0,5s
SDCM	<6	SDCM	<6	SDCM	<6
INSTALLATION	OUTDOOR	INSTALLATION	OUTDOOR	INSTALLATION	OUTDOOR
MAX INTENSITY	400 cd	MAX INTENSITY	400 cd	MAX INTENSITY	400 cd
Hg and Pb	0%	Hg and Pb	0%	Hg and Pb	0%
POWER SUPPLIER	ON BOARD	POWER SUPPLIER	ON BOARD	POWER SUPPLIER	ON BOARD




Measures.
710mm x 150mm x 170mm
This Outer Box Contains.
4 pcs

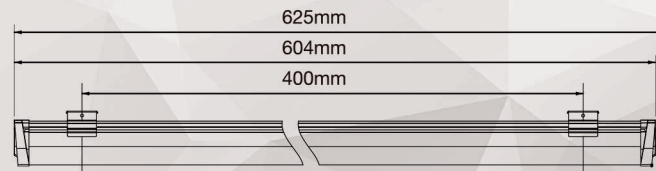

EASY FAST LINK SYSTEM

IP 65

IK 08

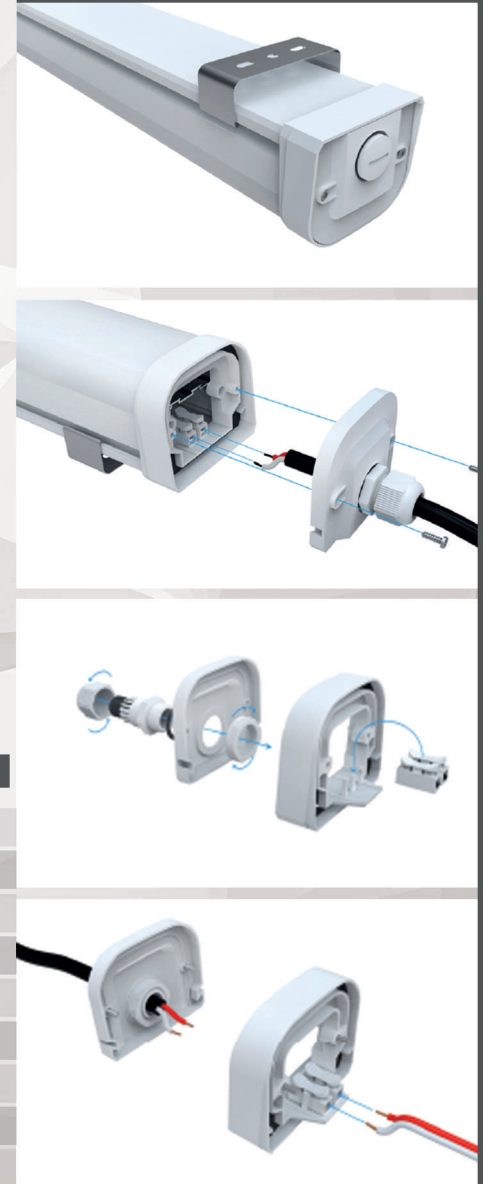

40
WATT



TRI-12040C

COLOR TEMPERATURE 3.000K



TRI-12040D

COLOR TEMPERATURE 4.200K



TRI-12040F

COLOR TEMPERATURE 6.400K

175-250V
50-60HZ



216 pcs
LED Q.TY



CLASS II
ELECTRIC



250°
FIELD ANGLE



30.000h
LIFESPAN




220°
BEAM ANGLE

LUMEN	3.400 lm	LUMEN	3.400 lm	LUMEN	3.500 lm
CRI	Ra80	CRI	Ra81	CRI	Ra84
DIMMABLE	NO	DIMMABLE	NO	DIMMABLE	NO
WARM-UP TIME	<0,5s	WARM-UP TIME	<0,5s	WARM-UP TIME	<0,5s
SDCM	<6	SDCM	<6	SDCM	<6
INSTALLATION	OUTDOOR	INSTALLATION	OUTDOOR	INSTALLATION	OUTDOOR
MAX INTENSITY	800 cd	MAX INTENSITY	800 cd	MAX INTENSITY	800 cd
Hg and Pb	0%	Hg and Pb	0%	Hg and Pb	0%
POWER SUPPLIER	ON BOARD	POWER SUPPLIER	ON BOARD	POWER SUPPLIER	ON BOARD




Measures.
1270mm x 150mm x 170mm
This Outer Box Contains.
4 pcs

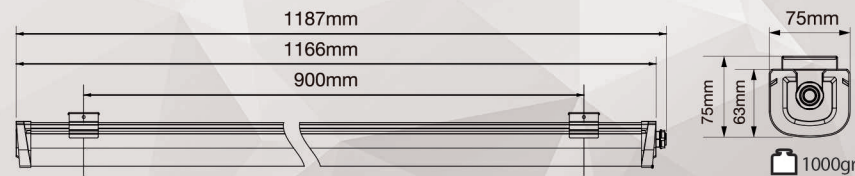

EASY FAST LINK SYSTEM



IP 65
IK 08

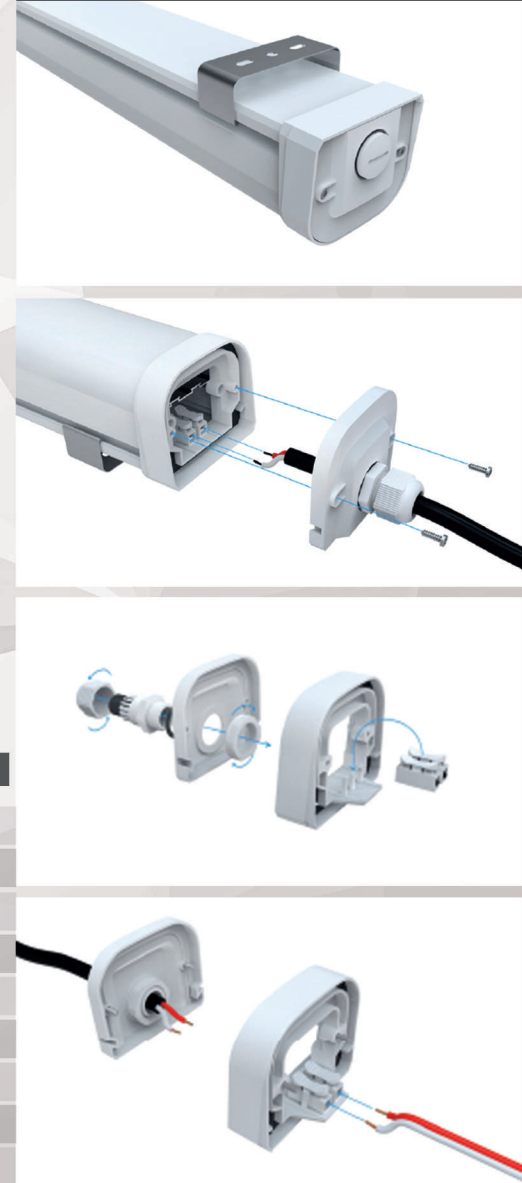

WATT
50



TRI-15050D

COLOR TEMPERATURE 3.000K



TRI-15050D

COLOR TEMPERATURE 4.200K



TRI-15050F

COLOR TEMPERATURE 6.400K

175-250V
50-60HZ



250°
FIELD ANGLE

270 pcs
LED Q.TY



30.000h
LIFESPAN

CLASS II
ELECTRIC





220°
BEAM ANGLE

LUMEN	4.300 lm	LUMEN	4.300 lm	LUMEN	4.400 lm
CRI	Ra80	CRI	Ra81	CRI	Ra84
DIMMABLE	NO	DIMMABLE	NO	DIMMABLE	NO
WARM-UP TIME	<0,5s	WARM-UP TIME	<0,5s	WARM-UP TIME	<0,5s
SDCM	<6	SDCM	<6	SDCM	<6
INSTALLATION	OUTDOOR	INSTALLATION	OUTDOOR	INSTALLATION	OUTDOOR
MAX INTENSITY	1000 cd	MAX INTENSITY	1000 cd	MAX INTENSITY	1000 cd
Hg and Pb	0%	Hg and Pb	0%	Hg and Pb	0%
POWER SUPPLIER	ON BOARD	POWER SUPPLIER	ON BOARD	POWER SUPPLIER	ON BOARD



Measures.
1550mm x 150mm x 170mm


This Outer Box Contains.
4 pcs

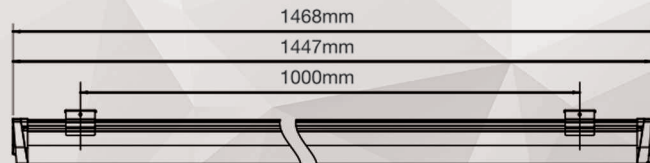

DOWNLIGHT

LED



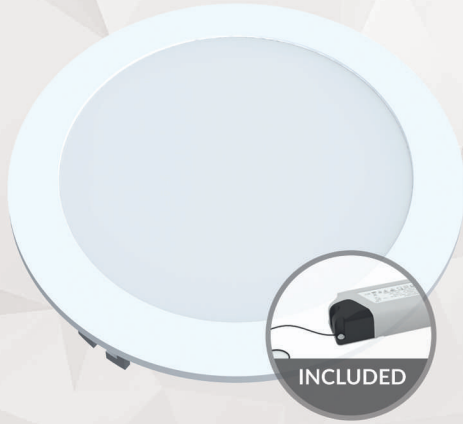

6 WATT

DL-IP1206C 3.000K

- 200-240V 50-60HZ
- NO DIMMABLE
- 600 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. 540mm x 325mm x 180mm
This Outer Box Contains. 40 pcs



8056039330702

- F
- Ra 80
- IK 05
- III
- CE

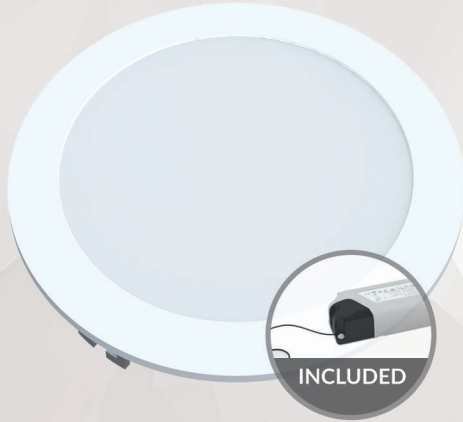

6 WATT

DL-IP1206D 4.000K

- 200-240V 50-60HZ
- NO DIMMABLE
- 600 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE





Measures. 540mm x 325mm x 180mm
This Outer Box Contains. 40 pcs



8056039330712

- F
- Ra 80
- IK 05
- III
- CE

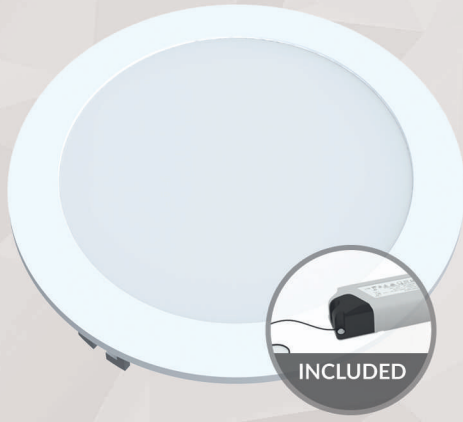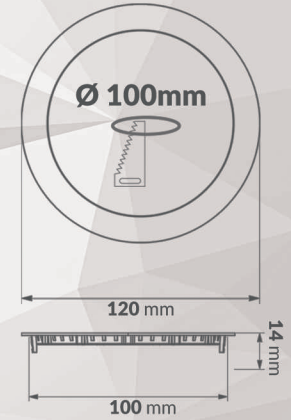

6 WATT

DL-IP1206F 6.000K

- 200-240V 50-60HZ
- NO DIMMABLE
- 600 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. 540mm x 325mm x 180mm
This Outer Box Contains. 40 pcs



8056039330726

- F
- Ra 80
- IK 05
- III
- CE



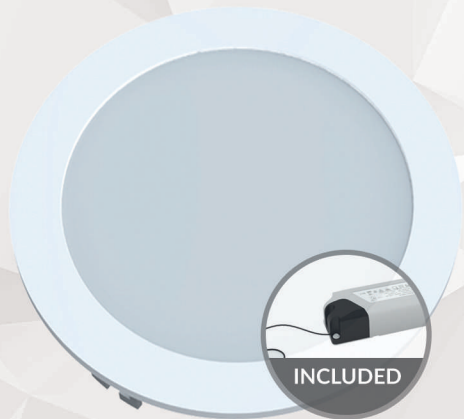

12 WATT

DL-IP17512C 3.000K


- 200-240V 50-60HZ
- NO DIMMABLE
- 1.200 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE



Measures. 375mm x 325mm x 235mm
This Outer Box Contains. 20 pcs



- F
- Ra 80
- IK 05
- III
- CE

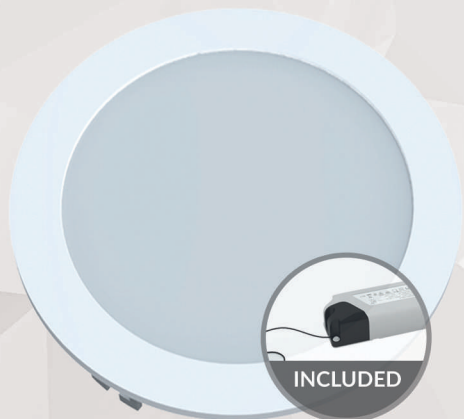

12 WATT

DL-IP17512D 4.000K


- 200-240V 50-60HZ
- NO DIMMABLE
- 1.200 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE



Measures. 375mm x 325mm x 235mm
This Outer Box Contains. 20 pcs



- F
- Ra 80
- IK 05
- III
- CE

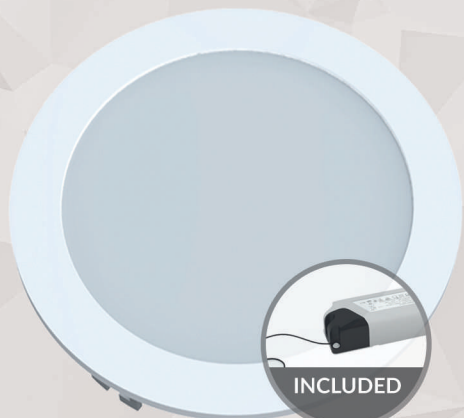

12 WATT

DL-IP17512F 6.000K

- 200-240V 50-60HZ
- NO DIMMABLE
- 1.200 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. 375mm x 325mm x 235mm
This Outer Box Contains. 20 pcs



- F
- Ra 80
- IK 05
- III
- CE



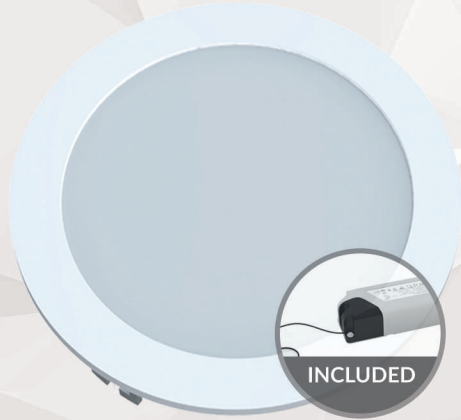

18 WATT

DL-IP22518C 3.000K

200-240V
50-60HZ

NO DIMMABLE

1.800 LUMEN


30.000h LIFESPAN

IP21 PROTECTION CLASS

120° BEAM ANGLE



Measures.
475mm x 325mm x 255mm
This Outer Box Contains.
20 pcs

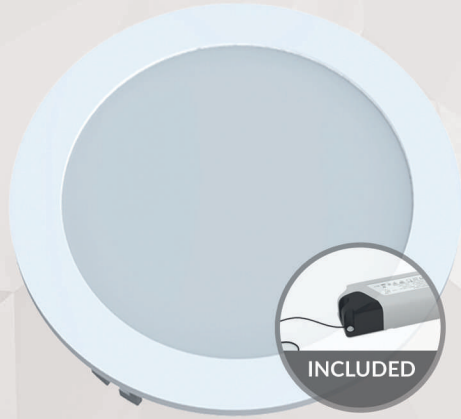

18 WATT

DL-IP22518D 4.000K

200-240V
50-60HZ

NO DIMMABLE

1.800 LUMEN


30.000h LIFESPAN

IP21 PROTECTION CLASS

120° BEAM ANGLE



Measures.
475mm x 325mm x 285mm
This Outer Box Contains.
20 pcs

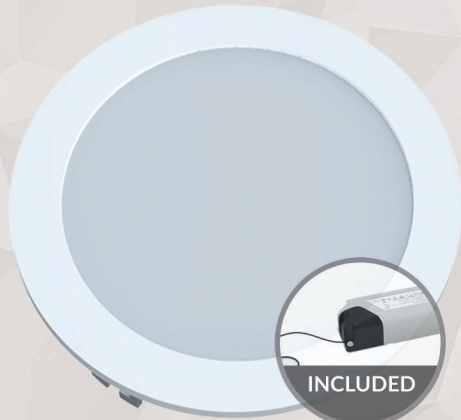

18 WATT

DL-IP22518F 6.000K

200-240V
50-60HZ

NO DIMMABLE

1.800 LUMEN


30.000h LIFESPAN


IP21 PROTECTION CLASS

120° BEAM ANGLE



Measures.
475mm x 325mm x 285mm
This Outer Box Contains.
20 pcs

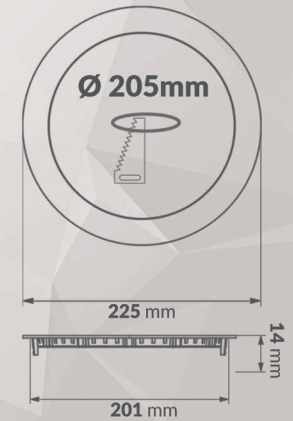

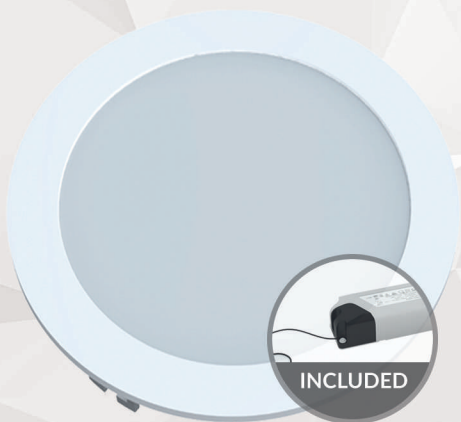

24 WATT

DL-IP30024C **3.000K**



- 200-240V 50-60HZ
- NO DIMMABLE
- 2.400 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE



Measures. **640mm x 325mm x 365mm**
This Outer Box Contains. **20 pcs**



- F
- Ra 80
- IK 05
-
-

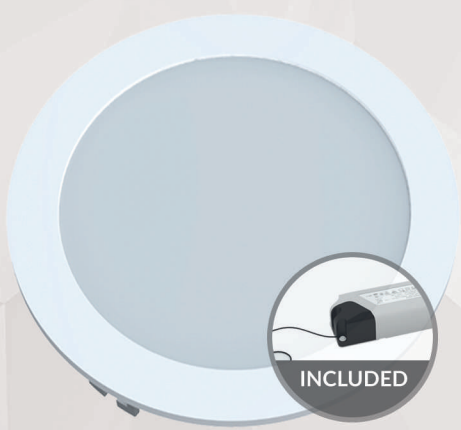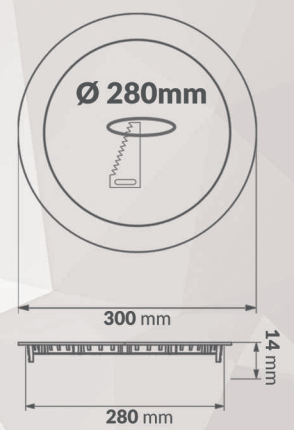

24 WATT

DL-IP30024D **4.000K**



- 200-240V 50-60HZ
- NO DIMMABLE
- 2.400 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE



Measures. **640mm x 325mm x 365mm**
This Outer Box Contains. **20 pcs**



- F
- Ra 80
- IK 05
-
-

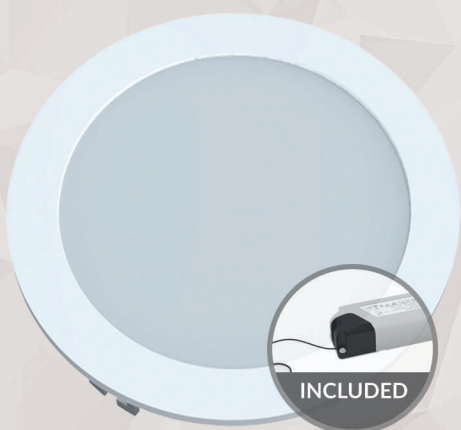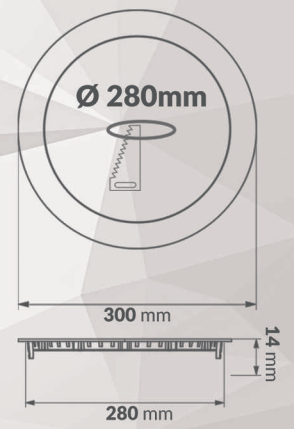

24 WATT

DL-IP30024F **6.000K**

- 200-240V 50-60HZ
- NO DIMMABLE
- 2.400 LUMEN
- 30.000h LIFESPAN
- IP21 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. **640mm x 325mm x 365mm**
This Outer Box Contains. **20 pcs**



- F
- Ra 80
- IK 05
-
-



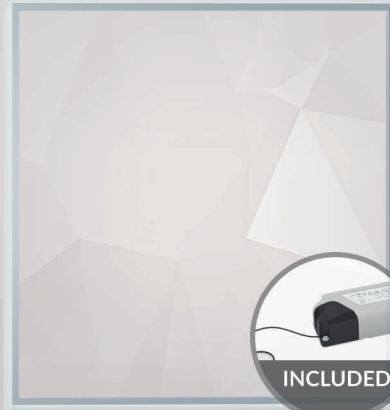

36 WATT

PF-6036D-GM 4.000K



- 200-240V 50-60HZ
- NO DIMMABLE
- 3.600 LUMEN
- 30.000h LIFESPAN
- IP20 PROTECTION CLASS
- 120° BEAM ANGLE



Measures.
635mm x 170mm x 635mm
This Outer Box Contains.
5 pcs



- F
- Ra 80
- IK 03
- III
- CE

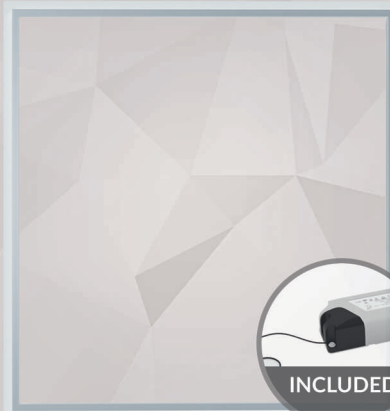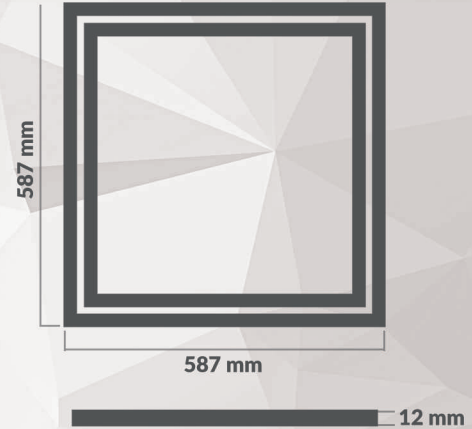

36 WATT

PF-6036F-GM 6.000K


- 200-240V 50-60HZ
- NO DIMMABLE
- 3.600 LUMEN
- 30.000h LIFESPAN
- IP20 PROTECTION CLASS
- 120° BEAM ANGLE



Measures.
635mm x 170mm x 635mm
This Outer Box Contains.
5 pcs



- F
- Ra 80
- IK 03
- III
- CE

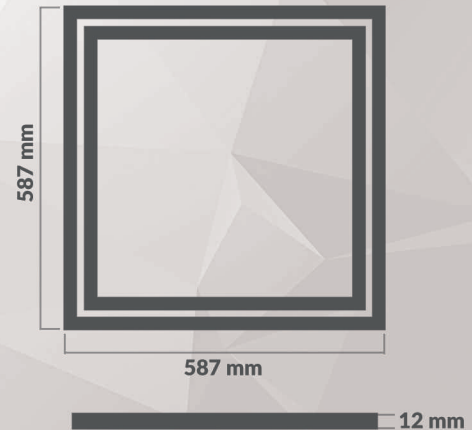



40 WATT

PN-6040C-LF **3.000K**




- 200-240V 50-60HZ
- NO DIMMABLE
- 4.000 LUMEN
- 30.000h LIFESPAN
- IP20 PROTECTION CLASS
- 120° BEAM ANGLE



Measures. **635mm x 220mm x 665mm**
This Outer Box Contains. **5 pcs**



- F
- Ra 80
- IK 03
-
-

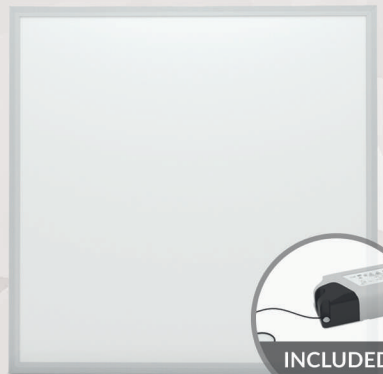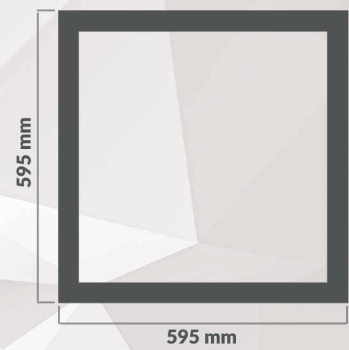

40 WATT

PN-6040D-LF **4.000K**



- 200-240V 50-60HZ
- NO DIMMABLE
- 4.000 LUMEN
- 30.000h LIFESPAN
- IP20 PROTECTION CLASS
- 120° BEAM ANGLE



Measures. **635mm x 220mm x 665mm**
This Outer Box Contains. **5 pcs**



- F
- Ra 80
- IK 03
-
-

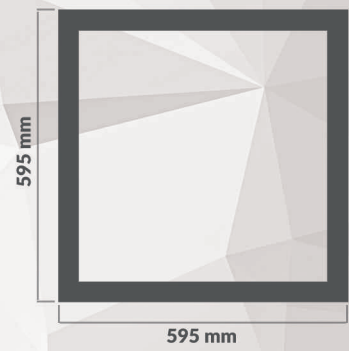

40 WATT

PN-6040F-LF **6.000K**



- 200-240V 50-60HZ
- NO DIMMABLE
- 4.000 LUMEN
- 30.000h LIFESPAN
- IP20 PROTECTION CLASS
- 120° BEAM ANGLE




Measures. **635mm x 220mm x 665mm**
This Outer Box Contains. **5 pcs**



- F
- Ra 80
- IK 03
-
-

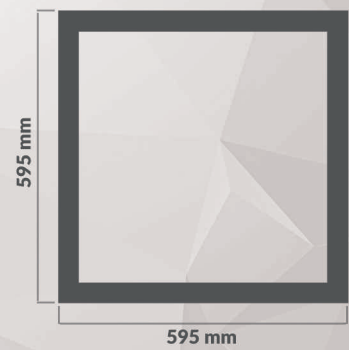

SMART LAMPS

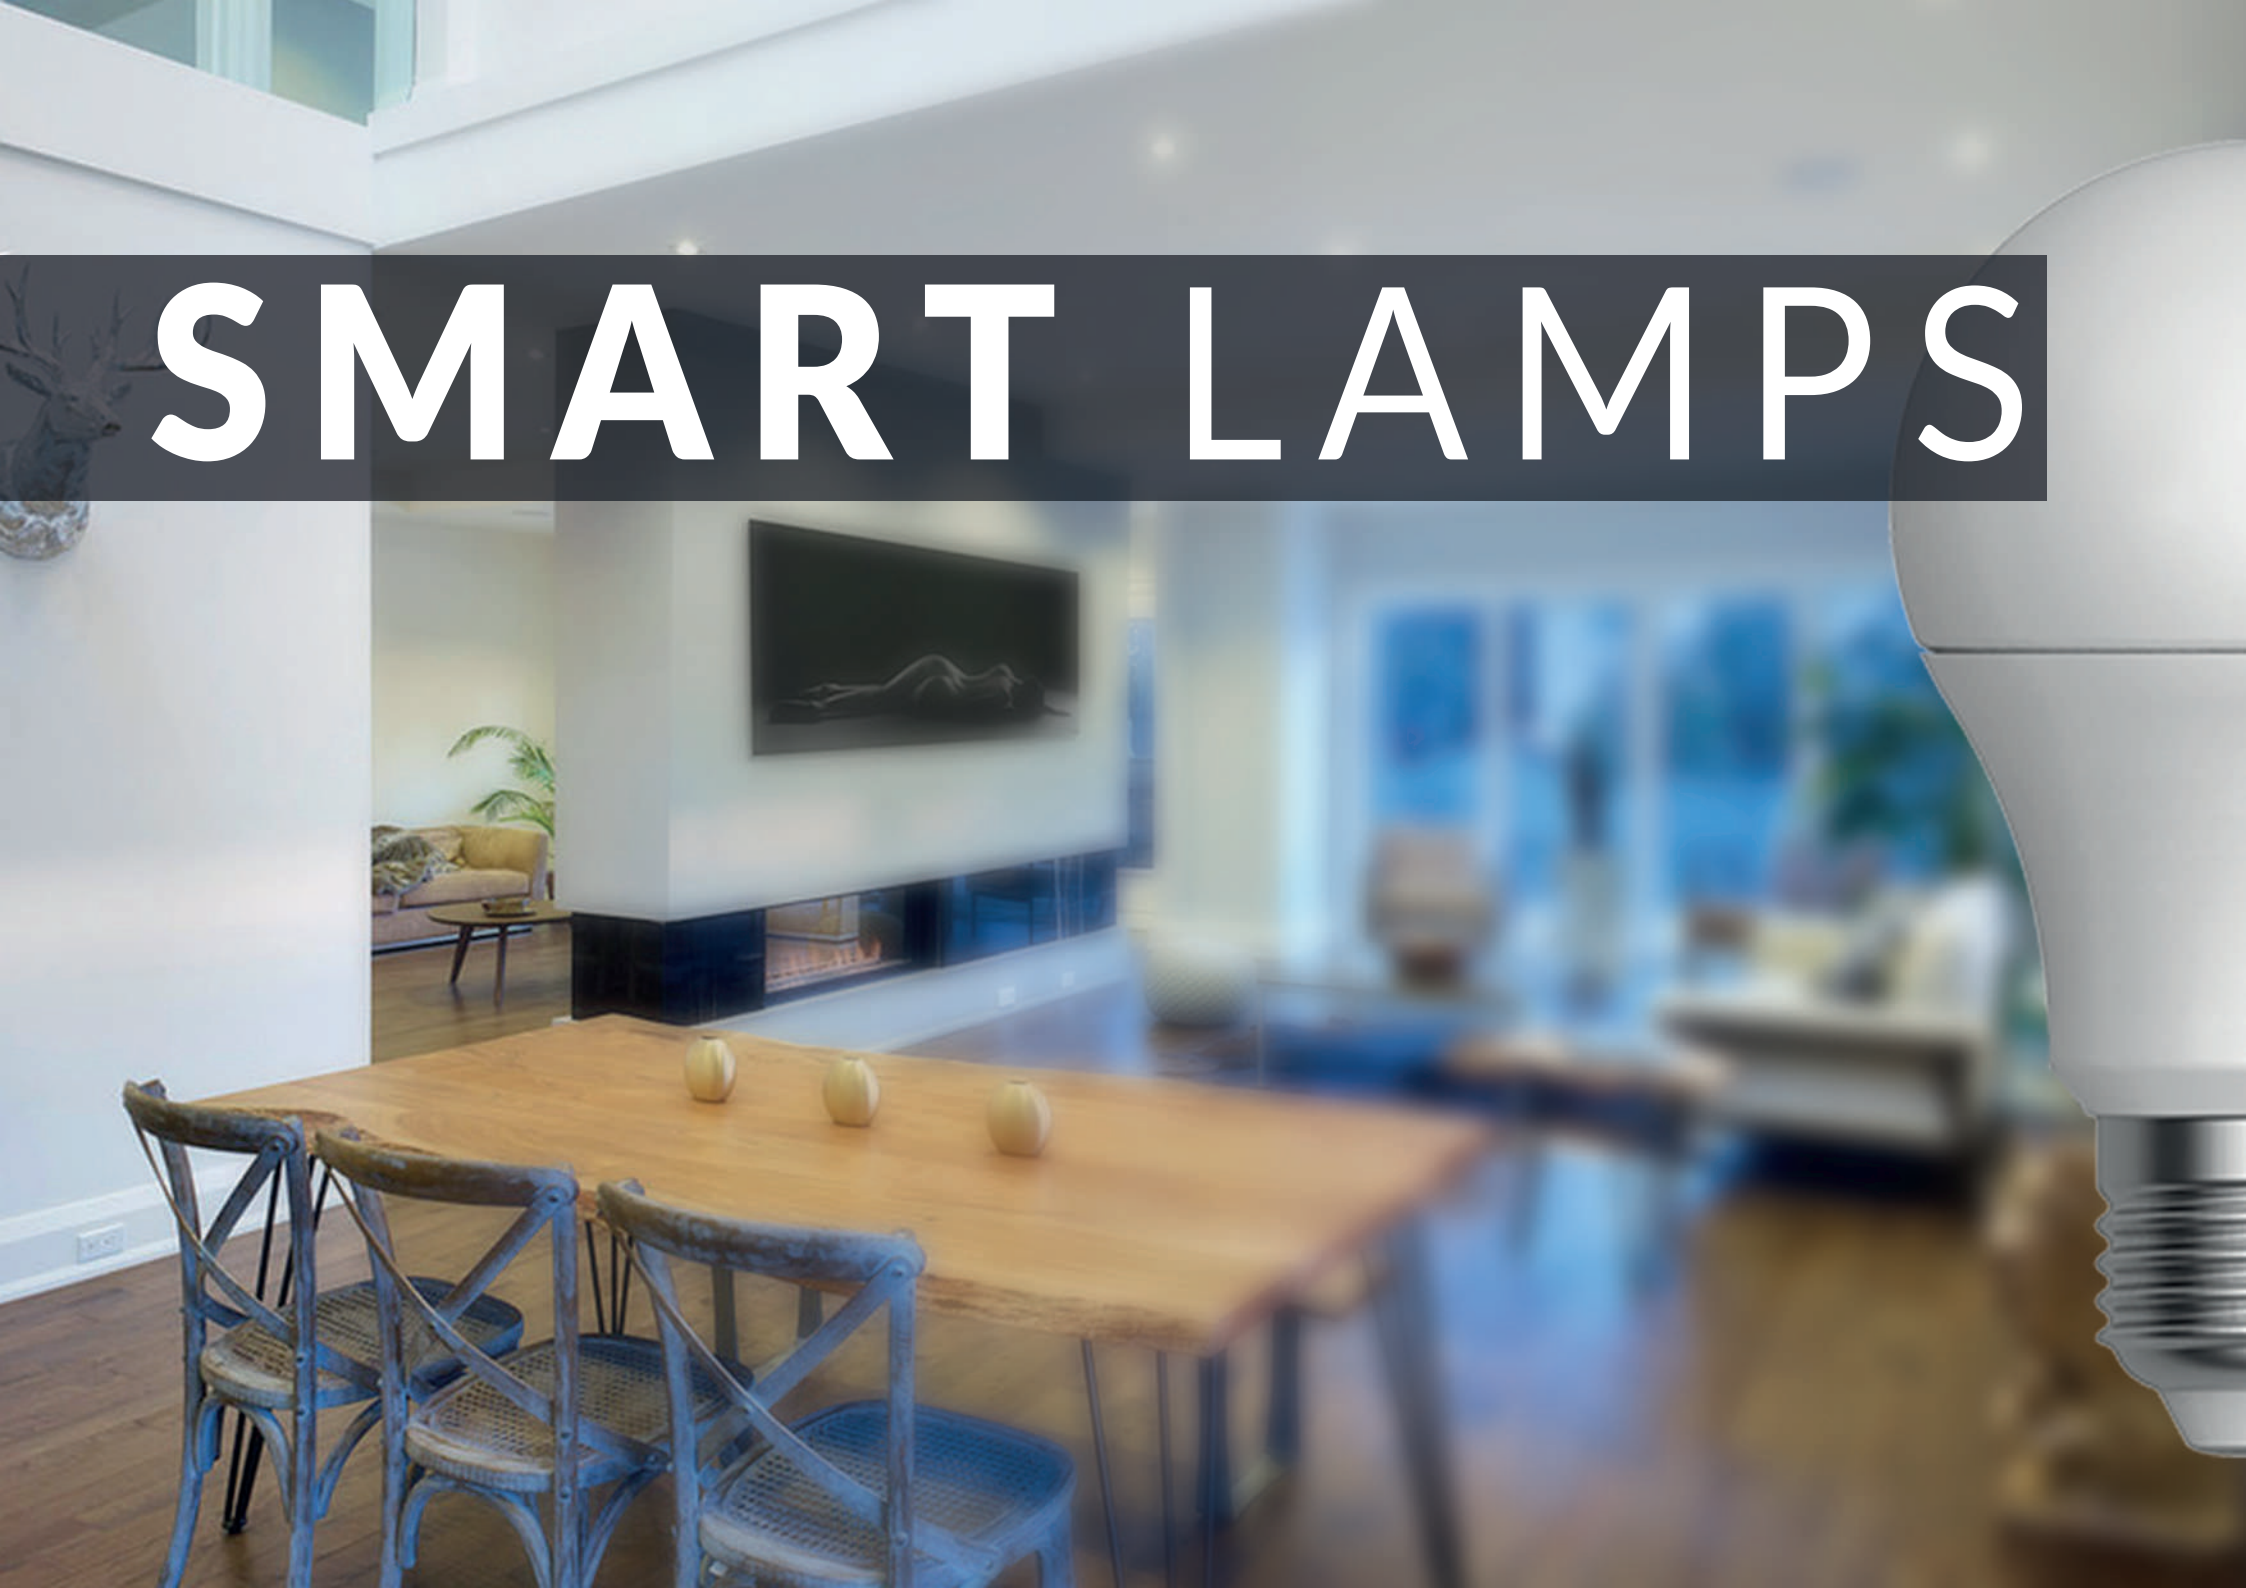

3.000K Warm White

1. STEP ON/FF 33% 2. STEP ON/FF 50% 3. STEP ON/FF 100%

8056039331259

ENERGY LABEL: A+, 9 WATT, 220-240V 50-60HZ, 800 LUMEN, 3 STEP DIMMABLE, 20.000h LIFESPAN, 300° BEAM ANGLE

A60-ADIM9C
DIMMABLE SWITCHING

3.000K 4.200K 6.400K

1. STEP ON/FF 2. STEP ON/FF 3. STEP ON/FF

8056039331266

ENERGY LABEL: A+, 9 WATT, 220-240V 50-60HZ, 800 LUMEN, 3 STEP DIMMABLE, 20.000h LIFESPAN, 300° BEAM ANGLE

A60-ACCT9C
COLOR SWITCHING


RGB COLOR WITH REMOTE CONTROL RGB

8056039331273

ENERGY LABEL: A+, 4 WATT, 220-240V 50-60HZ, 320 LUMEN, RGB REMOTE CONTROL, 20.000h LIFESPAN, 300° BEAM ANGLE

A60-RGB4
RGB COLOR / REMOTE

POWER FACTOR	0,50	POWER FACTOR	0,50
CRI	>80	CRI	>80
STARTING TIME	<0,5s	STARTING TIME	<0,5s
WARM-UP TIME	<0,5s	WARM-UP TIME	<0,5s
SDCM	<6	SDCM	<6
INSTALLATION	INDOOR	INSTALLATION	INDOOR
AT 6000h - LLMF >0.90 - LSF >0.90		AT 6000h - LLMF >0.90 - LSF >0.90	
CYCLE ON/OFF	>15.000 (1'on/3'off)	CYCLE ON/OFF	>15.000 (1'on/3'off)

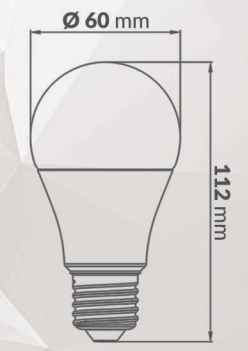

Measures.
335mm x 120mm x 670mm
This Outer Box Contains.
50 pcs

SWITCH SENSOR







INFRARED

MICROWAVE







SS-ST09

-  **220-240V**
50-60HZ
-  **10sec ± 7MIN**
TIME DELAY
-  **-20+40°C**
WORKING TEMPERATURE
-  **IP44**
PROTECTION CLASS
-  **12 MT**
DISTANCE MAX
-  **180°**
DETECTION RANGE

INFRARED SWITCH SENSOR

 Measures. **105mm x 215mm x 100mm**
This Innerbox Contains. **10 pcs**







 Measures. **525mm x 230mm x 425mm**
This Outerbox Contains. **50 pcs**



8056039331211




SS-ST700

-  **220-240V**
50-60HZ
-  **10sec ± 12MIN**
TIME DELAY
-  **-20+40°C**
WORKING TEMPERATURE
-  **IP20**
PROTECTION CLASS
-  **8 MT**
DISTANCE MAX
-  **360°**
DETECTION RANGE

MICROWAVE SWITCH SENSOR

 Measures. **260mm x 210mm x 130mm**
This Innerbox Contains. **10 pcs**







 Measures. **675mm x 275mm x 230mm**
This Outerbox Contains. **50 pcs**



8056039331198



SS-ST701F

-  **220-240V**
50-60HZ
-  **5sec ± 10MIN**
TIME DELAY
-  **-20+40°C**
WORKING TEMPERATURE
-  **IP20**
PROTECTION CLASS
-  **5-15 MT**
DISTANCE MAX
-  **180°/360°**
DETECTION RANGE

MICROWAVE SWITCH SENSOR

 Measures. **220mm x 170mm x 110mm**
This Innerbox Contains. **20 pcs**

 Measures. **575mm x 185mm x 240mm**
This Outerbox Contains. **100 pcs**



8056039331204



LFI LED FACTORY ITALIA

ADDRESS.

Via G.D'Anna, 42- 84012 Angri (Salerno) - Italia

phone. +39 (0) 81 919571

fax. +39 (0) 81 919571

internet. www.ledfactoryitalia.com

e-mail. info@ledfactoryitalia.com




QR CODE
download catalogue



COMPACT DESIGN

FLOOD LED

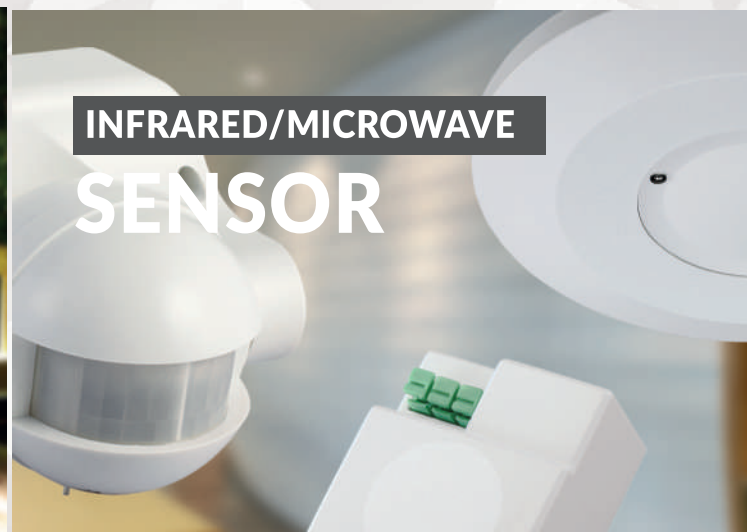

INFRARED/MICROWAVE

SENSOR



LED LAMP

A60

DIMMABLE SWITCHING
COLOR SWITCHING
RGB COLOR



COMPACT DESIGN

HIGHBAY LED



BODY ALUMINIUM

SOCKET GROUND



COMPACT DESIGN

DOWNLIGHT LED