

## SylMirror SYLMIRROR LED FLUTE IP44 NW 0043210



### Product features

- LED mirror/cabinet light with 6W total power consumption, 540 lumen, 144° beam angle, IP44, IK03, CRI 80, 4000K colour temperature, 25,000 hours average life time, 400 mm length, 2 year warranty. Flute shape.



### PRODUCT OVERVIEW

IPC Code	0043210
Product name	SYLMIRROR LED FLUTE IP44 NW
Technology	LED
Housing	PC
Mount	Wall/Cabinet
Fixture rating	Enclosed
General application	Residential & Consumer,
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4170554
Fixture luminous flux (lm)	540
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Total power consumption (W)	6
Electrical protection	Class II
Control gear type	Electronic (constant current)
Dimmable	No
Average life (Nominal) (h)	25000
Housing colour	Chrome
IP rating	IP44
IK rating	IK03
Product EAN number	5410288432106
Lamps	No
Included lamp	INTEGRATED LED

### DATA TABLE

General data

## SylMirror SYLMIRROR LED FLUTE IP44 NW 0043210

IPC Code	0043210
Product name	SYLMIRROR LED FLUTE IP44 NW
Technology	LED
Housing	PC
Mount	Wall/Cabinet
Fixture rating	Enclosed
General application	Residential & Consumer,
Operating temperature range (°C)	-10 ~ +45
Certifications	EUNEW009
ETIM Class	EC002892
E-number FI	4170554

### Optical data

Fixture luminous flux (lm)	540
Luminaire efficacy (lm/W)	90
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	6
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear required	No
Control gear type	Electronic (constant current)
Dimmable	No
Drive current (mA)	25
Inrush Current (A)	5
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 16A C Breaker	100

### Lifetime data

Lumen maintenance - L70 B50	25000
Average life (Nominal) (h)	25000

### Physical data

Housing colour	Chrome
IP rating	IP44
IK rating	IK03
Diffuser material	PC
Nominal Product Length (mm)	400
Nominal Product Width (mm)	115
Nominal Product Height (mm)	43


## SylMirror SYLMIRROR LED FLUTE IP44 NW 0043210

Weight (kg) 0.101


### Packaging

Single packaging type	Carton
Product EAN number	5410288432106
Packaging single length / height (cm)	41.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	6.5
DUN14 (outer)	15410288432103
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	41.0
Packaging outer depth (cm)	15.5

### PHOTOMETRY

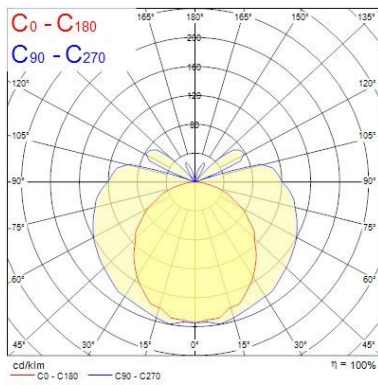



### TECHNICAL DRAWINGS




## SylMirror SYLMIRROR LED FLUTE IP44 NW 0043210


**SYLVANIA** 0043210


 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0043210  874/2012