



ITALIAN
LIGHTING
CREATORS



CATALOGUE N° 8.0

LED 2020



Our mission is to **inspire**
through the **different forms**
that **light can take on.**



INDEX

News	4	Shop95	230
Photo index	8	Track Lighting	240
About us	16		
		Sensors	242
Go Smart	26		
Aria Smart Wifi	30	Decorative LED	244
Blanca Smart	31	Suspension	246
Accento Smart	32	Ceiling	252
Spotfive Smart	35	Design	260
Smart Switch	36		
Smart Power	37	Outdoor	274
		Garden	276
LED light sources	38	Solar	284
Filament	40	Walk-over	296
Classic	64	Wall and ceiling	302
Spotlight	84	Accessories	306
Special	90		
Professional	106	Versatile	308
Tubes	122	Cabinet	310
		Night	314
LED linear systems	124	Hobby	316
LED strips	126		
Aluminium profiles	136	Floodlights	320
Ceilings	154	Portable	322
Watertight luminaires	160	Floodlights	332
		Sport	350
LED panels	166	Accessories	356
Recessed	168		
Surface	190	High/Low-Bay	358
Accessories	196		
		Street lights	366
Recessed light	200		
Emergency and courtesy	202	Display systems	374
Downlights	206		
Supports	212	Alphabetic index	376
Plaster	220		





ARIA SMART

 Page 30



BLANCA SMART
 Page 31



ACCENTO SMART
 Page 32/33





SPOTFIVE SMART
 Page 35



SMART SWITCH
 Page 36



SMART POWER
 Page 37

LED LIGHT SOURCES

FILAMENT

RANGE EXPANSION
 NATURAL LIGHT
AVAILABLE ON ALL LED SOURCES

4000K



INCANTO
 Page 45



INCANTO SATEN
 Page 48

BLISTER



INCANTO
 Page 58



INCANTO SATEN
 Page 61

NEW

SPECIAL



TRE-D

Page 98



TRE-D SLIM

Page 99



ARIA MULTICOLOR RGBW

Page 100

PROFESSIONAL



LOTUS

ALSO AVAILABLE IN
WARM LIGHT **1800K**

Page 115



PLOSE 360

Page 120



PAR56

GLASS LED LAMP
FOR POOLS

Page 121

LED LINEAR SYSTEMS

STRIP LED



ACCÈNTO

Page 128

CEILINGS



LINKY

Page 158 / 159

UGR<16
UNIFIED GLARE RATING

WATERTIGHT LUMINAIRES



EMERGENCY
3H
AUTONOMY

ITALIA ROUND

Page 165

LED PANELS



**P-QUADRO
ADVANCE
Backlight**

Page 180



Shards of light

**P-QUADRO
Recessed**

Page 188 / 189

RECESSED LIGHT

DOWNLIGHT



TRICOLOR

Switchable light colour
3000K-4000K-6000K

SPOTFIVE

Page 208 / 209

SUPPORTS

RECESSED LIGHT



Switchable light colour

KLIK

Page 214 - 215 -
216 - 217

SHOP 95



**FUTURA
SHOP 95**

Page 234

TRACK LIGHTING



BINARY

Page 240



Bi-directional
applique

FORMA
Page 270



AXO
Page 271 / 272

OUTDOOR

SOLAR



up to
8 HOURS of light per day
FOR FREE

LEVANTE
Page 294

HOBBY

VERSATILE



**SALLY
FUNNY
PENNY**

Page 318

FLOODLIGHTS



SIRIO SLIM
Page 342



PORTEO
Page 344



HERMES
Page 345

HIGH/LOW-BAY



DISCOVERY SLIM
Page 364



EVOSTREET
Page 369



CITYONE
Page 372

STREET LIGHTS



PHOTO INDEX

An overview before going into the details of
the best lighting solutions.



Aria Smart Wifi
Page 30



Blanca Smart
Page 31



Accento Smart
Page 32 / 33



Spotfive Smart
Page 35



Smart Switch
Page 36



Smart Power
Page 37

LED LIGHT SOURCES

FILAMENT



Incanto
Page 44



Incanto Saten
Page 47



Incanto Epoca
Page 52



Incanto Epoca Decorative
Page 54



Incanto Epoca XI
Page 55



Incanto Blister
Page 56



Incanto Saten Blister
Page 60

CLASSIC



Harmony 95
Page 66



Harmony 80
Page 68



Classica
Page 69



Onda
Page 70



Aria Plus
Page 72



Aria Bold
Page 76



Ecoline
Page 78



Aria Plus Blister
Page 81



Onda Blister
Page 82

SPOTLIGHT



Spot Maxiled - Multiled
Page 86



Lexar 38 - Dicro Shop 95
Page 87



Lexar 110
Page 88



Lexar 60
Page 89

SPECIAL



Pixy
Page 92



Fridge Lamp
Page 94



Killer 50
Page 95



Votive Lamp
Page 96



Exa - Zaphira
Page 97



Tre-D
Page 98



Tre-D Slim
Page 99



Aria Multicolor
Page 100



Sensor
Page 102



Circolina Led
Page 103



Killer 50 Blister
Page 104



Sensor Blister
Page 105



PI-Cover
Page 108



Gxled
Page 109



City Lamp - Superled
Page 110



Superled
Page 111



Serie Light
Page 112



Saphirled
Page 114



Lotus 70
Page 115



Maxima
Page 117



Maxima Round
Page 118



Plose 360
Page 120



Par56
Page 121

TUBES

LED LINEAR SYSTEMS

STRIP LED



Full Vision
Page 123



Accènto
Page 128



Accènto Pro
Page 130



Driver - Rgbw Controller
Wi-Fi Rgbw Controller
Page 134



Accessories
Accènto Pro
Page 135

ALUMINIUM PROFILES



Surface Profile
Page 138



Recessed Profile
Page 141



Corner Profile
Page 143



40° Profile
Page 144



Suspension Profile
Page 145



Uplight Profile
Page 146



Floor Profile
Page 147



Stairs Profile
Page 148



Perimeter Profile
Page 149



Plaster Profile
Page 150

CEILING



Speedy
Page 156



Stabila
Page 157



Linky
Page 158

WATERTIGHT LUMINAIRES



Suprema-V
Page 162



Suprema Advance
Page 163



Italia
Page 164



Italia Round
Page 165

LED PANELS

RECESSED



P-Tondo
Page 170



Frisbee
Page 171



Frisbee Quadro
Page 172



P-Quadro
Page 173



P-Quadro Advance
Page 175



P-Quadro 42U
Page 179



P-Quadro Advance Backlight
Page 180

LED PANELS

RECESSED



P-Quadro40 Advance
Page 181



P-Line 40
Page 182



P-Quadro Elegance
Page 183



Maratea
Page 186



False Panel
Page 187



P-Quadro Recessed
Page 188

SURFACE



PI-Tondo
Page 192



PI-Quadro - PI-Tondo
Page 193



PI-Quadro 47
Page 194

ACCESSORIES



**Driver Replacement
12W E 18W**
Page 196



Driver Replacement 24W
Page 196



Driver Replacement 40W
Page 196



Driver Replacement 42W
Page 196



**Dimmable Driver
42W 1-10W**
Page 197



**Dimmable Driver
42W Trailing Edge**
Page 197



Emergency Kit
Page 198



Daylight Sensor
Page 198



**Dimmable Driver
42W Dali**
Page 198



**Clip Kit - Ceiling Kit
Suspension Kit**
Page 198/199

RECESSED LIGHT

EMERGENCY AND COURTESY

DOWNLIGHT



Cortès
Page 204



Sicura Led
Page 205



SPOTfive
Page 208



Futura Led
Page 210



Futura Advance
Page 211

SUPPORTS



Klak
Page 213



Klik
Page 214



City Frame
Page 219

PLASTER



Jessy
Page 222



Kon170 - Miro200 - Dali310
Page 226



Jessy Bolle
Page 227



Eclisse
Page 228



Soffio
Page 229

SHOP95



Par Shop - Cameta
Page 233



Futura Shop 95
Page 234



**Venus Shop -
Regia Shop**
Page 236



REGIA SHOP
Page 237

TRACK LIGHT



Binary
Page 240



Connectors
Page 241

SENSOR



Sensors
Page 243

DECORATIVE LED

SUSPENSION



Fantasy
Page 248



Fusion 150
Page 249



Colorfull
Page 250



Per8
Page 251

CEILING



Blanca Perla
Page 254



Blanca Slim
Page 255



Pratika
Page 256



Oasi
Page 258

DESIGN



Qube
Page 264



Rondò
Page 265



Qube - Rondò
Page 266



Stylo
Page 267



Push & Go
Page 268



Up&Down
Page 269



Forma
Page 270



Axo
Page 271

OUTDOOR

GARDEN



Gaudino - Aladino - Paladino
Page 278



Lilandà
Page 279



Spike Light
Page 282



Fiesta Led
Page 283

SOLAR



Arcadia 1.5
Page 287



Arcadia 3.2 - Arcadia 6.8
Page 289



Diverso
Page 292



Levante
Page 294

WALK-OVER

WALL AND CEILING



Pavi
Page 298



Prima 45
Page 304



Hora - Hera
Page 305

ACCESSORIES



Connectors
Page 307



Driver
Page 307

VERSATILE

CABINET



Terry - Nemo - Italo
Page 311



Solidea
Page 313



Mouse - Tommy
Page 315

HOBBY



Sally - Funny - Penny
Page 318



Safety Car
Page 319

FLOODLIGHTS

PORTABLE



Mini Work
Page 326



Sirio Work - Century Work
Page 327



Free Work
Page 328



Rework
Page 329



Focus
Page 330

FLOODLIGHTS



Horienta12
Page 334



Horienta20
Page 335



Horienta Plus
Page 336



I-Flat
Page 337



Shuttle Slim
Page 338



Sirio Plus
Page 340



Sirio Slim
Page 343



Porteo
Page 344



Hermes
Page 345



Dmemory Advance
Page 348



Dmemory Advance Slim
Page 349

SPORT

ACCESSORIES



Opentop 180
Page 354



Stadio
Page 355



Stand50
Page 357



Tripod160
Page 357

HIGH/LOW-BAY



Extrema 150
Page 360



Extrema Accessories
Page 361



Discovery
Page 362



Discovery Slim
Page 364

STREET LIGHTS



EkoDeo
Page 368



Evostreet
Page 369



Shark Dim
Page 370



Zeroondo
Page 371



Cityone
Page 372



**WHERE IDEAS
COME TO
LIGHT**





THE COMPANY

ABOUT US

Since 1995 CENTURY has been a reference point in the **lighting field**, thanks to the ability to develop products perfectly in line with the consumers' needs, while maintaining the **ideal value for money**. Study, design and manufacture of products, using LED sources, with a special focus on **high performance and design**.

A professional team with a defined goal: to ensure the possibility of illuminating every space through **innovative and intelligent solutions**, with **high energy savings**.

24 years of research and progress, spent through steps that have left a mark. In 2004 the first innovative packaging with intuitive symbols and clear icons was developed.

Two years later, in 2006, the world's smallest electronic lamp – the model A13-7W – was launched on the market. An ever-evolving **creative art**: in 2007 Century launched the first Visual Box on the market, transparent PET packaging that increase the appeal of the product, largely imitated by competitors.



Then, in 2011, Century Italia had the widest range of CFL lamps in Europe. In the same year, it was the first to promote the concept of Luminous Efficiency, expressed in Lumen / Watt.

A story that is growing, as three years later Century presents the line of professional devices dedicated to the retail field, SHOP 95, with patented REELUX technology.

In 2016 Century opens its **new big house**. An area of 32,000 square meters where daily passionate people find new lighting solutions to improve other people's lives. The quality of work, the enthusiasm and the ability to look forward with renewed optimism and creative spirit make Century a **guarantee of professionalism and reliability** in the field of lighting.



COMMITMENT

Success is the result of hard work. In **Century** we know well how important it is to pursue **our goals** every day. **Team** building and collaboration is a fundamental component for the success of a company's work. This is the message that we pass on to all our employees.

INNOVATION

What is more beautiful than working for the construction of the **future**? We are not just talking about new products but about continuous improvement for the **planet** and for all of us. Every day we **develop** and think of new **ideas** that improve the lifestyle of our customers and contribute to the **safeguard** of our planet.



SUSTAINABILITY

Energy saving and environmental sustainability are values expressed not only by our products: they are an integral part of the **corporate culture**. Since 2017, 200 **photovoltaic panels** have been installed on our site, making it 50% independent in terms of energy. The aspiration is to achieve complete autonomy by 2022.

INTEGRITY

Respect for people, things and planet resources makes us **proud**. For years we have been building lasting personal relationships based on **honesty, respect and collaboration**. There is no long-term sustainability without professional, corporate and **personal integrity**.

ENERGY SAVING AND SUSTAINABILITY

We are aware that today's choices will affect the world of tomorrow, so we are committed to **look to the future** with responsibility. This leads to the protection of **human health** and respect for the environment.

These values become operational practice, a corporate policy that focuses on people and aims to significantly reduce the environmental impact with the use of **renewable energy sources**. From our company to our products: we think of sustainable solutions with high energy savings and full respect for the environment.

LED is more... all the eco benefits of LED: longer life, less replacement, less waste and absence of harmful substances are the main reasons for choosing a technology that offers **significant savings** and protects the people and the environment.





CONTINUOUS RESEARCH AND INNOVATION

Lighting aims to excellence



THE STRENGTH OF COLOR

Century strongly believes in the **quality of light** rendering by offering – to consumers and professionals – solutions which reach CRI>95 values. CRI index measures, from a minimum of 0 to a maximum of 100, the ability of light to make the **colours of objects natural and real**.



WITH QUALITY PRODUCTS YOU NEVER GO **WRONG**



Century develops solutions that can illuminate offices, rooms, classrooms and workplaces guaranteeing the maximum **visual comfort**.

For this reason, several products register **UGR** factor less than **19**. Unified Glare Rating is developed to measure direct glare for each specific application.

Its **value** depends on the disposition of the lighting fixtures, the features of the environment (size and reflection indices) and operator's observation point.

Values range from 10 (no glare) to 30 (consistent glare), according to a scale of 3 units: the lower the value, the lower the glare.

This unified factor considers the **luminance of the background** (ceiling, walls) and the light of each device placed in the room from a standard observer position.


Century offers pleasant and efficient lighting, ensuring daily **visual comfort** in the workplace.



A WHOLE NEW ONLINE EXPERIENCE

A totally renewed space at your disposal, to be consulted how, when and where you want. The website **www.century-italia.com** has changed shape, always taking into account what the corporate values are: **commitment, innovation, integrity and sustainability**. Above these values a site that meets the needs of **professionals** and **consumers** is born.

Ease of use makes **the user experience** more and more **enjoyable** and **performing**. The structure is ideal to match the needs of each user.

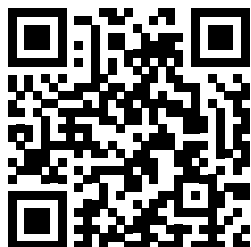

Discovering all the **news** in lighting has never been so quick and easy.


Scan the **QR code**.

Visit **www.century-italia.com**



Stories

Since 1995, every day, **we design innovative projects** to bring the best in every home, family and organization to make the world more efficient and sustainable.

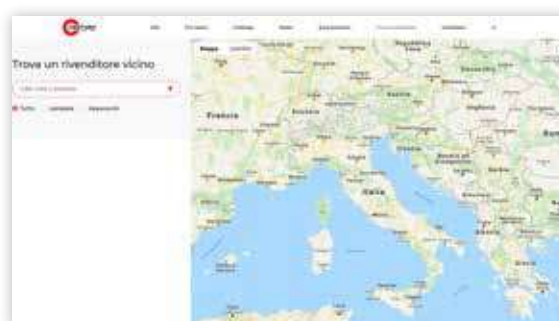

Find Reseller

Are you looking for a nearby retailer? From today, it takes **just one click** to know where you can buy all Century product range.



Line Presentation

We go into detail about each product line, presenting all the features and everything you need to make **your experience simple** and **unique** with **solutions** designed to illuminate.



Technical Data and Documents

Each product has its **qualities** and **prerogatives**. We are ready to show you them by offering all the documentation and specifications just a click away



Business area

A **space** entirely dedicated to **B2B**, a new system that allows us to get in touch with our professional customers by providing the best possible **support**.



SMART

Home automation at no cost!



ARIA SMART WIFI · BLANCA SMART
ACCENTO SMART · SPOTFIVE SMART
SMART SWITCH · SMART POWER

Remote control from smartphone

VOICE control

Powered by
tuya



NO HUB REQUIRED



Timer On / Off



Choosing from millions of colours



Brightness Adjustment



Synchronized control



You can illuminate any environment from any location, even away from home: through voice, thanks to virtual assistants, or directly from a smartphone with active data connection. Turning on, turning off, adjusting colour and brightness, plus whole new features that no lighting device has ever been had.

Smart solutions



Once commanding light bulbs with voice was only in sci-fi movies. Now it's reality. Through the voice or through the app we can **set the brightness and shade of colour**, schedule the turn on or off and much more...




Voice control

You can use your voice to ask Alexa or Google Assistant to turn on the light, adjust its colour and brightness. Magic!

Timer ON / OFF

Adapt your light to your routine. You can **schedule the power-on** along with your alarm and the power-off when you leave. You can simulate your presence when you're on vacation, or schedule a **night shutdown** in the children's room.

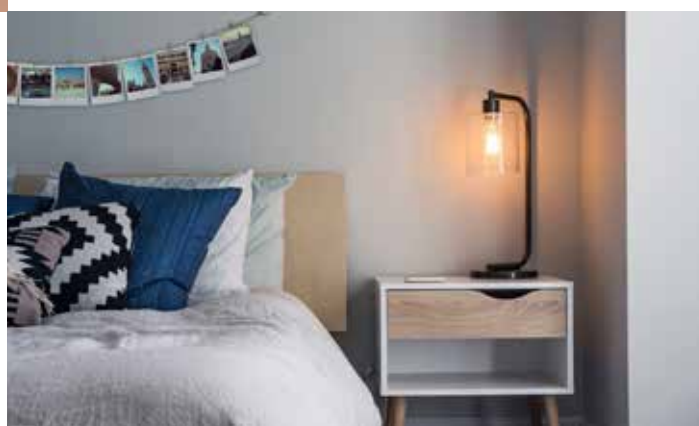



Millions of colours

Colour is emotion, energy, mood. Create the **right atmosphere** for every occasion thanks to the **infinite possibilities of choice**.



Pure white, high brightness

When you need light, choose white. Lots of **light with a CRI>85**. Set a cold white for reading or studying and a warm white for less demanding activities.



Dimmable

Adjust the brightness to suit your needs: your home is a dynamic place and the light can adapt to you.



Create your own groups

Group together your GO SMART devices for a **synced control**. All the light in your house will be in the palm of your hand!



Wherever you are

You can **control** and **adjust** your light both **at home and outside**. No additional network device (or gateway) is required, just a smartphone and a data connection. Simple, isn't it?

NEW

GO SMART

ARIA SMART

Wi-Fi

Dimmable

2 YEARS
WARRANTY



3000K-6500K

G3SMART
Smart Bulb A60

ADVANTAGES

You can use your smartphone or your voice to ask ALEXA and GOOGLE ASSISTANT virtual assistants to turn on the light, adjust the colour or its intensity. You can schedule the turn-on with the alarm clock or simulate your presence when you're on vacation, or schedule the night shutdown in the children's room.

APPLICATIONS

Ideal for home environments and general lighting.

Characteristics

RA	25.000	on off	-83%	IP20	A+	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class	Ok flammable surfaces

BLISTER

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW G3SMART-102700	E27	10W	60W	806Lm	RGB-3000K-6500K	220-240V/AC 50/60 Hz	220°	50mA	≥0,50	60x118	50	10/50	€ 21,50

Powered by



Remote control
from smartphone



Timer
ON/OFF



Synchronized control
of groups



Millions of colours and
different shades of white



Brightness
Adjustment



NEW

GO SMART

BLANCA SMART

2 YEARS
WARRANTY



3000K-6500K

BCSMA
Smart Ceiling Light

ADVANTAGES

You can use your smartphone or use your voice to ask ALEXA and GOOGLE ASSISTANT virtual assistants to turn on the light, adjust the colour or its intensity. You can schedule the turn-on with the alarm clock or simulate your presence when you're on vacation, or schedule the night shutdown in the children's room.

Characteristics

-80%	IP20	I	F
Savings	Degree of protection	Insulation class	Ok flammable surfaces

APPLICATIONS


Ideal for home environments and general lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW BCSMA-243800	24W	48W	1800Lm	3000K-6500K	230V/AC 50/60 Hz	120°	197mA	> 0,50	380x60	-	1/10	€ 59,00

Powered by



Remote control
from smartphone



Timer
ON/OFF



Synchronized control
of groups



Millions of colours and
different shades of white



Brightness
Adjustment



NEW

GO SMART

ACCENTO SMART

2 YEARS
WARRANTY



ready
to go!



ACRSMA
Smart LED Strip Kit
(ready to use)



ADVANTAGES

You can use your smartphone or use your voice to ask ALEXA or GOOGLE ASSISTANT virtual assistants to turn on the light, adjust the colour or its intensity. The kit includes Strip LED RGB White, power supply and controller.

Characteristics

RA	35.000	on off	IP20	A++	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for home environments and general lighting.

Product code	Meters	Watt	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Power factor	Weight gr	Packing pcs	Price
NEW ACRSMA-484800	5m	4.8W/m x 5m	1650	RGBW-4000K	220 -240V/AC	120°	110mA	> 0,50	315	10 / 20	€ 69,00

Powered by



Remote control
from smartphone



Timer
ON/OFF



Synchronized control
of groups



Millions of colours and
different shades of white



Brightness
Adjustment



NEW

GO SMART

ACCENTO SMART

2 YEARS
WARRANTY



CTLSMA
LED Strip Controller
RGBW

COMPATIBLE WITH
ACRGBW-196010 PAG. 128

ADVANTAGES

You can use your smartphone or use your voice to ask ALEXA or GOOGLE ASSISTANT virtual assistants to turn on the light, adjust the colour or its intensity. The CTLSMA controller makes traditional RGBW Strip LED smart (comp. with ACRGBW-196010).

Characteristics

IP20

Degree of protection

APPLICATIONS


Ideal for home environments and general lighting.

Product code	Watt	Volt/ Hertz	Milliamps	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
NEW CTLSMA-ACRGBW	Max 120W	12-24 V DC	4CH x 5 A	45x85x22	45	10 / 20	€ 33,00

Powered by



Remote control from smartphone



Timer
ON/OFF



Synchronized control of groups



Millions of colours and different shades of white



Brightness Adjustment





THE POWER OF LIGHT
IN YOUR HANDS



NEW

GO SMART

SPOTfive SMART

Dimmable



SPFRSMA
Smart Downlight
RGB + CCT



3000K-6500K



SPFSMA
Smart Downlight
CCT



3000K-6500K

ADVANTAGES

You can use your smartphone or use your voice to ask ALEXA and GOOGLE ASSISTANT virtual assistants to turn on the light, adjust the colour or its intensity. You can schedule the turn-on together to the alarm clock or simulate your presence when you are on vacation, or schedule the night shutdown in the children's room.

Characteristics

RA	35.000	on off	-52%	IP20	IK08	A+	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Impact protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for hotels, shops, offices and general lighting.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW SPFRSMA-121400	12W	24W	750Lm	RGBW-3000K-6500K	220-240V/AC 50/60 Hz	120°	76mA	> 0,50	200x75	420	10/20	€ 54,00
NEW SPFRSMA-181900	18W	48W	1170Lm	RGBW-3000K-6500K	220-240V/AC 50/60 Hz	120°	160mA	> 0,50	220x75	420	10/20	€ 75,00
NEW SPFSMA-181900	18W	48W	1800Lm	CCT-3000K-6500K	220-240V/AC 50/60 Hz	100°	180mA	> 0,50	190x65	310	10/20	€ 49,00
NEW SPFSMA-241900	24W	50W	2400Lm	CCT-3000K-6500K	220-240V/AC 50/60 Hz	100°	230mA	> 0,50	190x65	310	10/20	€ 52,00

Powered by



Remote control
from smartphone



Timer
ON/OFF



Synchronized control
of groups



Millions of colours and
different shades of white



Brightness
Adjustment



NEW

GO SMART

SMART SWITCH

2 YEARS
WARRANTY

GO
SMART

Change your old switches with new voice-controlled solutions

SWSMA-1
1-WAY TOUCH SWITCH

SWSMA-2
2-WAY TOUCH SWITCH

SWSMA-3
3-WAY TOUCH SWITCH

SUITABLE FOR 503 BOXES

ADVANTAGES

You can use your smartphone or use your voice to ask ALEXA and GOOGLE ASSISTANT virtual assistants to turn the light on and off. You can schedule the turn-on with the alarm clock or simulate your presence when you're on vacation, or schedule the night shutdown in the children's room.

Characteristics

IP20

Degree of protection

APPLICATIONS

Ideal for home environments and general lighting.

Product code	Volt/Hertz	Milliamps	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW SWSMA-1	220-240V/AC 50/60 Hz	5 A	12x7x4	154	1/1	€ 45,00
NEW SWSMA-2	220-240V/AC 50/60 Hz	5 A	12x7x4	154	1/1	€ 49,00
NEW SWSMA-3	220-240V/AC 50/60 Hz	5 A	12x7x4	154	1/1	€ 55,00

Powered by



Remote control from smartphone



Countdown



Timer ON/OFF



Synchronized control of groups



NEW

GO SMART

SMART POWER



SCKSMA
Smart schuko plug



CTLSMA
Smart switch with infra cable connection

ADVANTAGES

You can use your smartphone or use your voice to ask ALEXA and GOOGLE ASSISTANT virtual assistants to turn the light or household appliances on and off. You can schedule any device to turn on and off.

Characteristics

IP20

Degree of protection

APPLICATIONS


Ideal for making any device or device smart.

Product code	Watt	Volt/Hertz	Milliamps	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW SCKSMA	Max 3680 W	220-240V/AC 50/60 Hz	Max 16 A	53x77x53	92	25/50	€ 29,00
NEW CTLSMA	Max 2200 W	90-250V/AC 50/60 Hz	Max 10 A	38x88x22	44	20/100	€ 21,00

Powered by
tuya



Remote control
from smartphone



Countdown



Timer
ON/OFF



Synchronized control
of groups






LED LIGHT SOURCES

The evolution of lighting sources has led to different shapes with the same performance qualities.



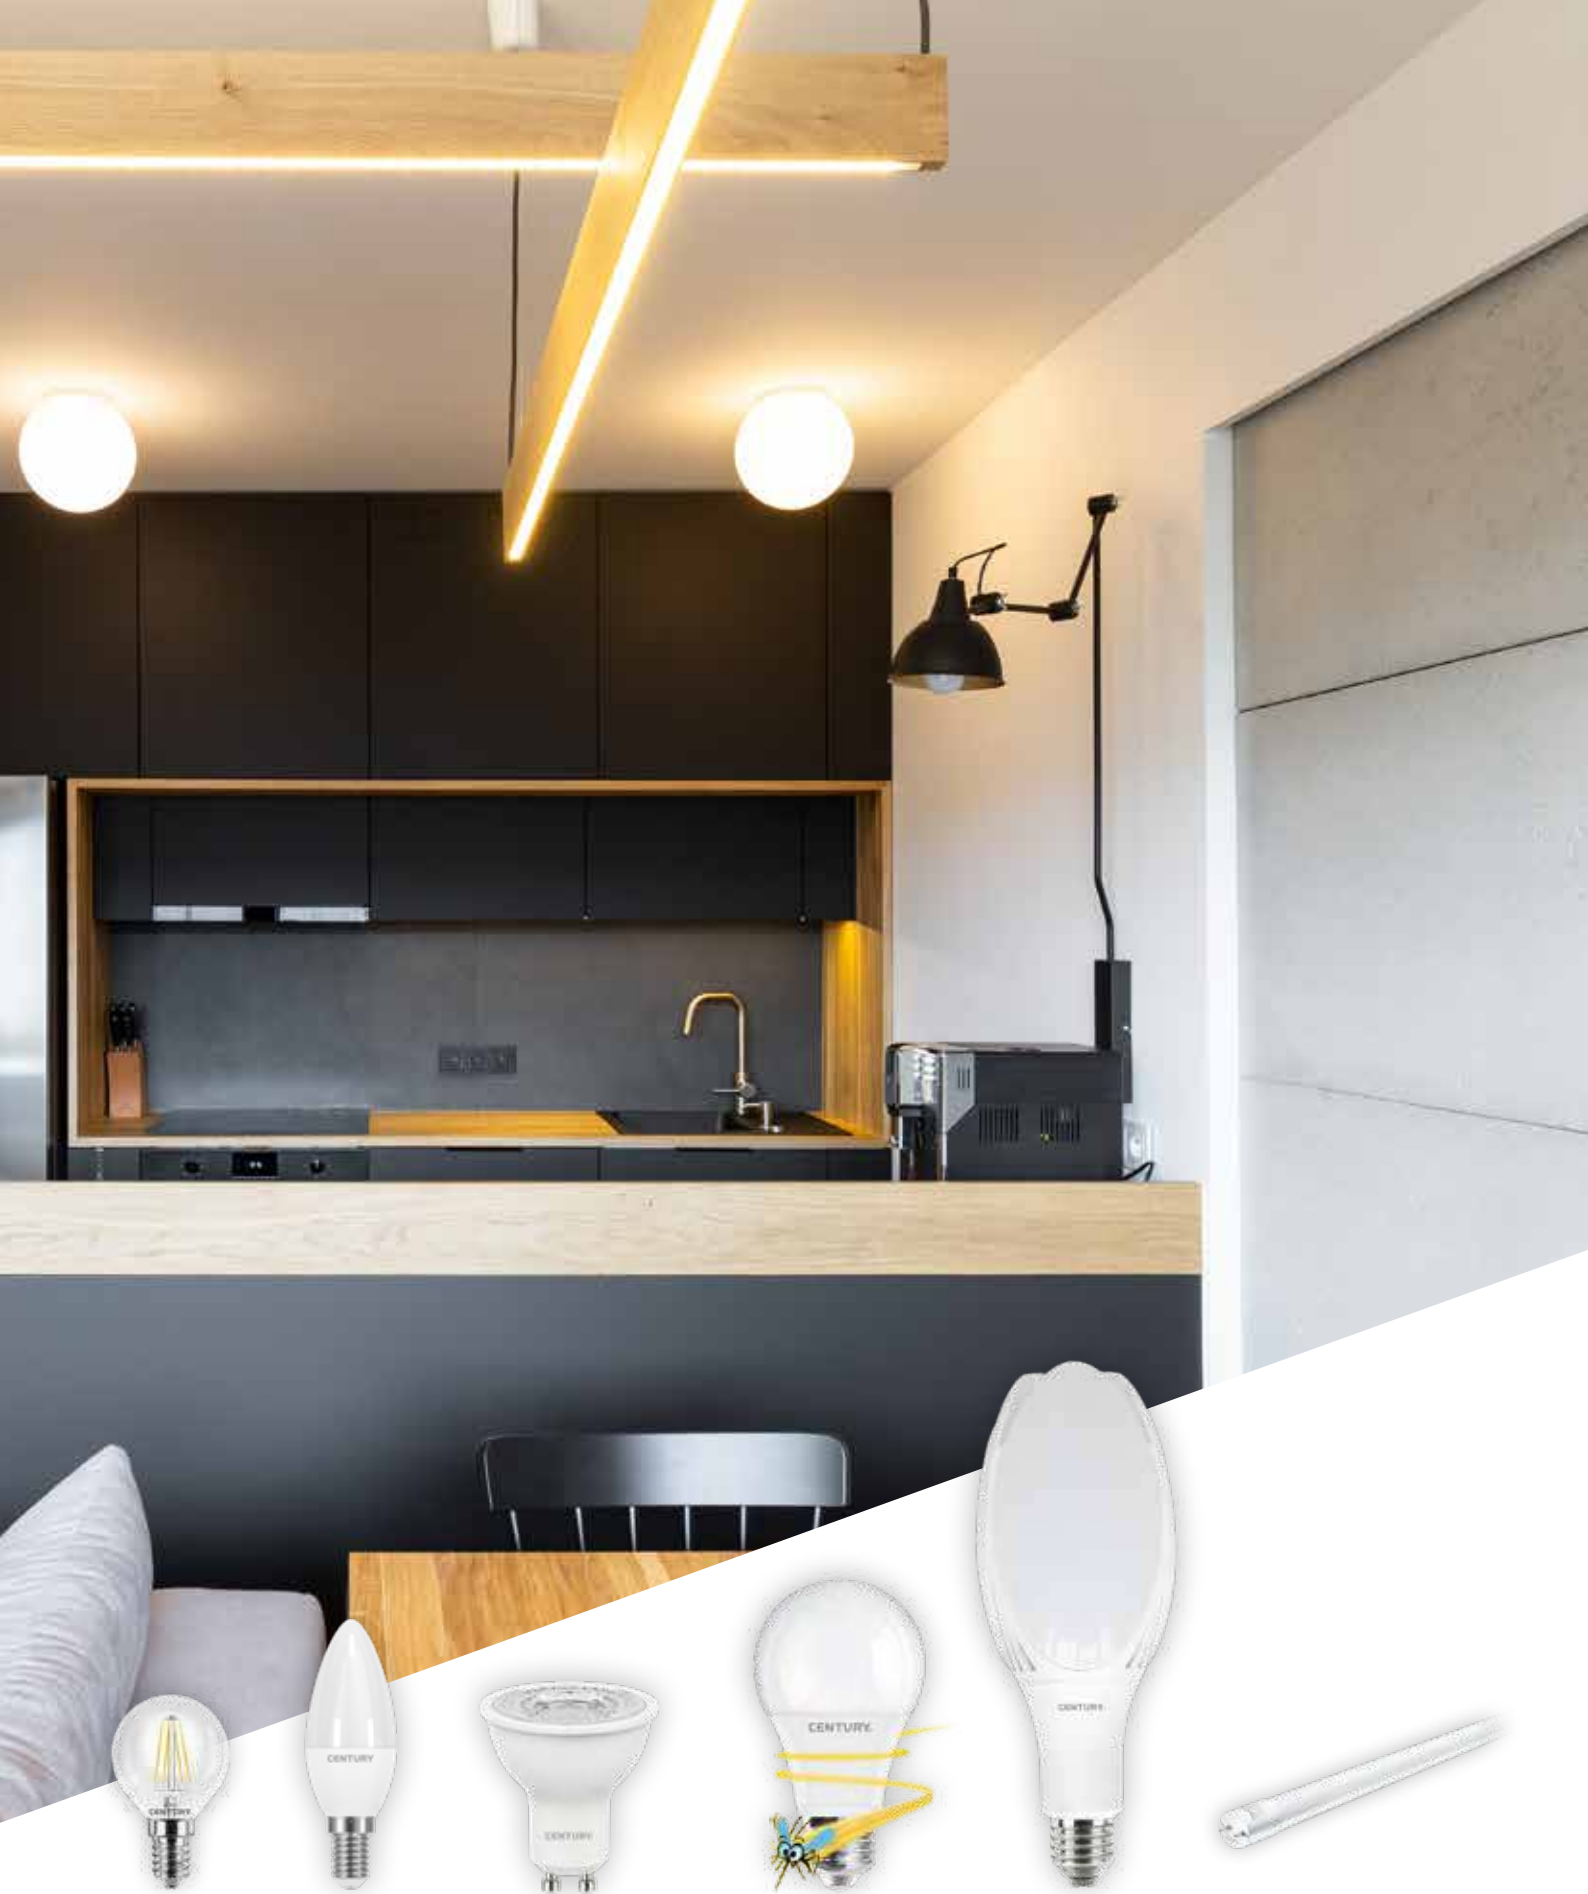

FILAMENT · CLASSIC · SPOT · SPECIAL · PROFESSIONAL · TUBES




LED filament lamps with classic style design. They are ideal for replacing incandescent bulbs for a more efficient and environmentally friendly lifestyle. They produce pleasant natural light and adapt perfectly to any environment, saving energy costs by more than 80% compared to traditional lamps.



LED LIGHT SOURCES

FILAMENT

INCANTO · INCANTO SATEN · INCANTO EPOCA ·
INCANTO EPOCA DECORATIVE · INCANTO EPOCA XL ·
INCANTO Blister · INCANTO SATEN Blister

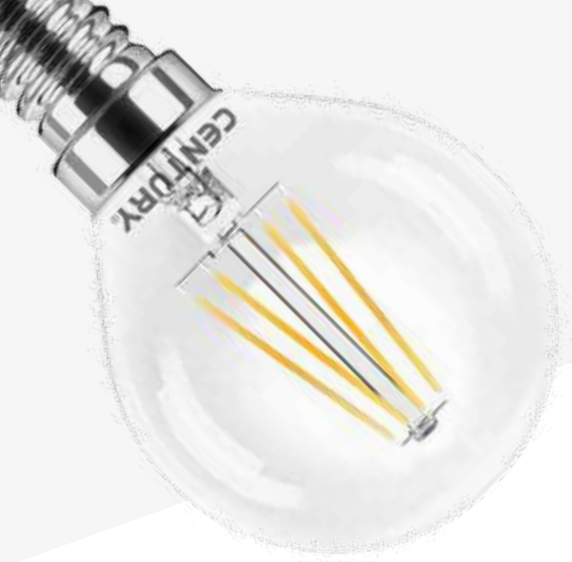

LED LIGHT SOURCES

FILAMENT

Design LED filament lamps, ideal for replacing conventional incandescent bulbs without giving up their **beauty**. They enhance and give elegance to the environment. Thanks to the **360° light diffuse angle**, you can light up all the spaces in the room by reducing the shadow areas.

Thanks to these many advantages, LED filament technology is destined to become the standard in LED sources.



INCANTO

Classic lamps, which promotes a pleasant and **relaxing atmosphere**. Ideal for an application in bars, restaurants, hotels and for home use.



INCANTO SATEN

Classic lamps entirely made of satin glass that makes the **light** even softer. Ideal for applications in bars, restaurants, hotels and for home use.



They are used for realization of appliques or suspensions and are highly appreciated by the public because they create a warm and welcoming lighting environment. This creates an effect lighting.



INCANTO EPOCA

The amber glass makes the light bulb pleasant to the eye even if it is switched off. Each light bulb recreates a **nostalgic atmosphere** by adding a **vintage** touch. Dimmable models are also available.



INCANTO DECORATIVE

The Incanto Decorative lamps provide impressive lighting. Their special spiral filament makes the **environments magical**. They are ideal to customize your environment, give a touch of elegance and enhance every lamp.

LED LIGHT SOURCES - FILAMENT INCANTO



INH1G
SPHERE E14

INH1G
SPHERE E27

INM1
CANDLE E14

INTOR
CANDLE E14

INM1C
FLAME E14

ADVANTAGES

Transparent bulbs with innovative LED filament technology that allows you to create an intimate and evocative atmosphere. Energy savings of 90%. Available in colour temperature 2700K and 4000K.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INH1G-021427	E14	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	45x76	13	10/50	€ 2,90
INH1G-022727	E27	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	45x76	13	10/50	€ 2,90
INM1-021427	E14	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	35x98	14	10/50	€ 2,90
INM1C-021427	E14	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	37x118	14	10/50	€ 2,90
INH1G-041427	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	10/50	€ 3,50
NEW INH1G-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	10/50	€ 3,50
INH1G-042727	E27	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	10/50	€ 3,50
NEW INH1G-042740	E27	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	10/50	€ 3,50
INM1-041427	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
NEW INM1-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
INTOR-041427	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
NEW INTOR-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
INM1C-041427	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	10/50	€ 3,50
NEW INM1C-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	10/50	€ 3,50

NEW

LED LIGHT SOURCES - FILAMENT

INCANTO

2 YEARS
WARRANTY



INH1G
SPHERE E14

INH1G
SPHERE E27

INM1
CANDLE E14

ADVANTAGES

Transparent bulbs with innovative LED filament technology that allows you to create an intimate and evocative atmosphere. Energy savings of 90%. Available in colour temperature 2700K and 4000K.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW INH1G-061427	E14	6W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	10/50	€ 4,20
NEW INH1G-061440	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	10/50	€ 4,20
NEW INH1G-062727	E27	6W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	10/50	€ 4,20
NEW INH1G-062740	E27	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	10/50	€ 4,20
NEW INM1-061427	E14	6W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	10/50	€ 4,20
NEW INM1-061440	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	10/50	€ 4,20

LED LIGHT SOURCES - FILAMENT INCANTO

2 YEARS
WARRANTY

NEW
16 W
2300 lm!



ING3
BULB E27



ING95
GLOBE E27



ING125
GLOBE E27

NEW
16 W
2300 lm!



INTB
E14



INTB
E14

**Also ideal for
cooker hoods**

ADVANTAGES

Transparent bulbs with innovative LED filament technology that allows you to create an intimate and evocative atmosphere. Energy savings of 90%. Available in colour temperature 2700K and 4000K.

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Characteristics

RA	25.000	on off	-90%	IP20	A++
-----------	---------------	-------------------	-------------	-------------	------------

CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class
--------	---------------------	---------------------	---------	-------------------------	--------------------

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ING3-042727	E27	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	60x105	30	10/50	€ 3,60
NEW ING3-042740	E27	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	60x105	30	10/50	€ 3,60
ING3-082727	E27	8W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	61mA	> 0,50	60x105	30	10/50	€ 4,20
NEW ING3-082740	E27	8W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	61mA	> 0,50	60x105	30	10/50	€ 4,20
NEW ING3-162727	E27	16W	140W	2300Lm	2700K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	60x105	30	10/50	€ 13,90
NEW ING3-162740	E27	16W	140W	2300Lm	4000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	60x105	30	10/50	€ 13,90
ING3P-082727	E27	8W	75W	1055Lm	2700K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	10/50	€ 4,90
NEW ING3P-082740	E27	8W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	10/50	€ 4,90
ING3-102727	E27	10W	100W	1521Lm	2700K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	10/50	€ 6,20
NEW ING3-102740	E27	10W	100W	1521Lm	4000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	10/50	€ 6,20
NEW ING95-082727	E27	8W	75W	1055Lm	2700K	220-240V/AC 50/60 Hz	360°	64mA	> 0,50	95x140	60	5/20	€ 8,50
NEW ING95-082740	E27	8W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	360°	64mA	> 0,50	95x140	60	5/20	€ 8,50
ING125-102727	E27	10W	100W	1521Lm	2700K	220-240V/AC 50/60 Hz	360°	80mA	> 0,50	125x174	103	5/20	€ 11,90
NEW ING125-102740	E27	10W	100W	1521Lm	4000K	220-240V/AC 50/60 Hz	360°	80mA	> 0,50	125x174	103	5/20	€ 11,90
ING125-102760	E27	10W	100W	1521Lm	6000K	220-240V/AC 50/60 Hz	360°	80mA	> 0,50	125x174	103	5/20	€ 11,90
NEW ING125-162727	E27	16W	140W	2300Lm	2700K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	125x174	103	5/20	€ 17,90
NEW ING125-162740	E27	16W	140W	2300Lm	4000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	125x174	103	5/20	€ 17,90
INTB-021427	E14	2W	25W	240Lm	2700K	220-240V/AC 50/60 Hz	360°	20mA	> 0,50	25x85	10	10/50	€ 5,30
INTB-061427	E14	6W	55W	750Lm	2700K	220-240V/AC 50/60 Hz	360°	48mA	> 0,50	30x100	15	10/50	€ 6,90

LED LIGHT SOURCES - FILAMENT

INCANTO SATEN



INSH1G
SPHERE E14

INSH1G
SPHERE E27

INSM1
CANDLE E14

INSTOR
CANDLE E14

INSM1C
FLAME E14

ADVANTAGES

Satin-finished bulbs capable of generating a soft and diffuse light and available in different colour temperatures. Energy savings of 90%.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

	Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
	INSH1G-041430	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	10/50	€ 3,50
NEW	INSH1G-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	10/50	€ 3,50
	INSH1G-041460	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	10/50	€ 3,50
	INSH1G-042730	E27	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	10/50	€ 3,50
NEW	INSH1G-042740	E27	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	10/50	€ 3,50
	INSH1G-042760	E27	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	10/50	€ 3,50
	INSM1-041430	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
NEW	INSM1-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
	INSM1-041460	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
	INSTOR-041430	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
NEW	INSTOR-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
	INSTOR-041460	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 3,50
	INSM1C-041430	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	10/50	€ 3,50
NEW	INSM1C-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	10/50	€ 3,50
	INSM1C-041460	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	10/50	€ 3,50

NEW

LED LIGHT SOURCES - FILAMENT INCANTO SATEN

2 YEARS
WARRANTY



INSH1G
SPHERE E14



INSH1G
SPHERE E27



INSM1
CANDLE E14

ADVANTAGES

Satin-finished bulbs capable of generating a soft and diffuse light and available in different colour temperatures. Energy savings of 90%.

Characteristics

RA

CRI>80

25.000

Lifetime
(hours)

on
off

≥15.000
Switches

-90%

Savings

IP20

Degree of
protection

A++

Energetic
class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW INSM1-061430	E14	6W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	10/50	€ 4,20
NEW INSM1-061440	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	10/50	€ 4,20
NEW INSM1-061460	E14	6W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	10/50	€ 4,20
NEW INSH1G-061430	E14	6W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	10/50	€ 4,20
NEW INSH1G-061440	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	10/50	€ 4,20
NEW INSH1G-061460	E14	6W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	10/50	€ 4,20
NEW INSH1G-062730	E27	6W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	10/50	€ 4,20
NEW INSH1G-062740	E27	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	10/50	€ 4,20
NEW INSH1G-062760	E27	6W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	10/50	€ 4,20

LED LIGHT SOURCES - FILAMENT

INCANTO SATEN

2 YEARS
WARRANTY



INSG3
BULB E27

NEW
16 W
2300 lm!



INSG125
GLOBE E27

ADVANTAGES

Satin-finished bulbs capable of generating a soft and diffuse light and available in different colour temperatures. Energy savings of 90%.

Characteristics

RA	25.000	on off	-90%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INSG3-082730	E27	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	60x105	30	10/50	€ 4,20
NEW INSG3-082740	E27	8W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	60x105	30	10/50	€ 4,20
INSG3-082760	E27	8W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	60x105	30	10/50	€ 4,20
NEW INSG3-162730	E27	16W	140W	2300Lm	3000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	60x105	30	10/50	€ 13,90
NEW INSG3-162740	E27	16W	140W	2300Lm	4000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	60x105	30	10/50	€ 13,90
NEW INSG3-162760	E27	16W	140W	2300Lm	6000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	60x105	30	10/50	€ 13,90
INSG3P-082730	E27	8W	75W	1055Lm	3000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	10/50	€ 4,90
NEW INSG3P-082740	E27	8W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x111	30	10/50	€ 4,90
INSG3P-082760	E27	8W	75W	1055Lm	6000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	10/50	€ 4,90
INSG3-102730	E27	10W	100W	1521Lm	3000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	10/50	€ 6,20
NEW INSG3-102740	E27	10W	100W	1521Lm	4000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	10/50	€ 6,20
INSG3-102760	E27	10W	100W	1521Lm	6000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	10/50	€ 6,20
INSG125-102730	E27	10W	75W	1055Lm	3000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	125x174	103	5/20	€ 11,90
NEW INSG125-102740	E27	10W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	125x174	103	5/20	€ 11,90
INSG125-102760	E27	10W	75W	1055Lm	6000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	125x174	103	5/20	€ 11,90
NEW INSG125-162730	E27	16W	140W	2300Lm	3000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	125x174	103	5/20	€ 17,90
NEW INSG125-162740	E27	16W	140W	2300Lm	4000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	125x174	103	5/20	€ 17,90
NEW INSG125-162760	E27	16W	140W	2300Lm	6000K	220-240V/AC 50/60 Hz	360°	123mA	> 0,50	125x174	103	5/20	€ 17,90

LED LIGHT SOURCES - FILAMENT

INCANTO SATEN

Dimmerabile

2 YEARS
WARRANTY



INSH1GD
SPHERE E14



INSH1GD
SPHERE E27



INSM1CD
FLAME E14



INSG3D
BULB E27

ADVANTAGES

Satin-finished bulbs capable of generating a soft and diffuse light and available in different colour temperatures. Energy savings of 90%. Dimmable with trailing-edge systems with LED dimmer.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INSH1GD-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	10/50	€ 5,50
INSH1GD-042740	E27	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	10/50	€ 5,50
INSM1D-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 5,50
INSM1CD-041440	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x118	14	10/50	€ 5,50
INSG3D-082740	E27	8W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	60x105	30	10/50	€ 8,50



Incanto
TO GIVE LIGHT TO THE MOST
beautiful stories



LED LIGHT SOURCES - FILAMENT INCANTO EPOCA



INVM1
CANDLE E14



INVM1D
CANDLE E14



INVTOR
CANDLE E14



INVM1C
FLAME E14

ADVANTAGES

Amber-finished bulbs with a colour temperature of 2200K that guarantees an intimate and evocative atmosphere. INVM1D-041422 is dimmable with trailing-edge systems with LED Dimmer. Energy savings of 87%.

Characteristics

RA	25.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable solution for restaurants, pubs and interiors with vintage design.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INVM1-041422	E14	4W	30W	320Lm	2200K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 5,30
INVM1D-041422	E14	4W	30W	320Lm	2200K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 6,70
INVTOR-041422	E14	4W	30W	320Lm	2200K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	10/50	€ 5,30
INVM1C-041422	E14	4W	30W	320Lm	2200K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	10/50	€ 5,30

LED LIGHT SOURCES - FILAMENT INCANTO EPOCA

2 YEARS
WARRANTY



INV G3
BULB E27



INV P
BULB E27



INV G125
GLOBE E27

ADVANTAGES

Amber-finished bulbs with a colour temperature of 2200K that guarantees an intimate and evocative atmosphere. INV PD-082722 and INV G125D-102722 are dimmable with trailing-edge systems with LED Dimmer. Energy savings of 84%.

Characteristics

RA	25.000	on off	-84%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable solution for restaurants, pubs and interiors with vintage design.

Product code	Con- nection	Watt	EQUIVA- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INV G3-082722	E27	8W	50W	630Lm	2200K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	60x106	31	10/50	€ 7,90
INV P-082722	E27	8W	50W	630Lm	2200K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	64x138	48	10/50	€ 9,40
INV PD-082722	E27	8W	50W	630Lm	2200K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	64x138	48	10/50	€ 11,90
INV G125-082722	E27	8W	50W	630Lm	2200K	220-240V/AC 50/60 Hz	360°	46mA	> 0,50	125x175	99	5/20	€ 16,50
INV G125-102722	E27	10W	60W	806Lm	2200K	220-240V/AC 50/60 Hz	360°	60mA	> 0,50	125x174	103	5/20	€ 18,90
INV G125D-102722	E27	10W	60W	806Lm	2200K	220-240V/AC 50/60 Hz	360°	60mA	> 0,50	125x175	99	5/20	€ 21,50

LED LIGHT SOURCES - FILAMENT

INCANTO EPOCA

Decorative



INVDM1
CANDLE E14



INVDG3
BULB E27



INVDP
BULB E27



INVDG95
GLOBE E27

ADVANTAGES

Amber-finished bulbs with 2700K colour temperature and special spiral LED filament. They are ideal for decorative applications and provide a unique and evocative atmosphere. Energy savings of 90%.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable solution for restaurants, pubs and interiors with vintage design.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INVDM1-021427	E14	2W	20W	190Lm	2700K	220-240V/AC 50/60 Hz	360°	22mA	> 0,50	35x98	14	10/50	€ 4,90
INVDG3-042727	E27	4W	30W	320Lm	2700K	220-240V/AC 50/60 Hz	360°	23mA	> 0,50	60x107	33	10/50	€ 6,20
INVDP-042727	E27	4W	30W	320Lm	2700K	220-240V/AC 50/60 Hz	360°	23mA	> 0,50	64x140	43	10/50	€ 7,20
INVDG95-042727	E27	4W	30W	320Lm	2700K	220-240V/AC 50/60 Hz	360°	23mA	> 0,50	95x143	57	10/50	€ 13,50

LED LIGHT SOURCES - FILAMENT

INCANTO EPOCA XL

Dimmerabile



INVPS160
GLOBE E27



INVG200
GLOBE E27

ADVANTAGES

Amber-finished bulbs with a colour temperature of 2200K that guarantees an intimate and evocative atmosphere. Dimmable with trailing-edge systems with LED Dimmer. Energy savings of 87%.

Characteristics

RA	25.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable solution for restaurants, pubs and interiors with vintage design.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INVPS160-082722	E27	8W	60W	806Lm	2200K	220-240V/AC 50/60 Hz	360°	70mA	> 0,50	160x230	265	1/4	€ 69,00
INVG200-082722	E27	8W	60W	806Lm	2200K	220-240V/AC 50/60 Hz	360°	70mA	> 0,50	200x305	366	1/4	€ 72,00



INH1G
SPHERE E14



INM1
CANDLE E14



INM1C
FLAME E14



INTB
E14

Also suitable for
kitchen hoods

ADVANTAGES

Transparent bulbs with innovative LED filament technology that allows you to create an intimate and evocative atmosphere. Saving 90%. Available in colour temperature 2700K and 4000K.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INH1G-021427BL2	E14	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	45x76	13	6/48	€ 6,50
INH1G-022727BL2	E27	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	45x76	19	6/48	€ 6,50
INM1-021427BL2	E14	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	35x98	14	6/48	€ 6,50
INM1C-021427BL2	E14	2W	25W	245Lm	2700K	220-240V/AC 50/60 Hz	360°	17mA	> 0,50	37x118	14	6/48	€ 6,50
NEW INTB-021427BL	E14	2W	25W	240Lm	2700K	220-240V/AC 50/60 Hz	360°	20mA	> 0,50	25x85	10	12/48	€ 5,30
NEW INTB-061427BL	E14	6W	55W	750Lm	2700K	220-240V/AC 50/60 Hz	360°	48mA	> 0,50	30x100	15	12/48	€ 6,90



INH1G
SPHERE E14



INH1G
SPHERE E27



INM1
CANDLE E14



INM1C
FLAME E14

ADVANTAGES

Transparent bulbs with innovative LED filament technology allow you to create an intimate and evocative atmosphere. Energy savings of 90%. Available in colour temperature 2700K and 4000K.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INH1G-041427BL2	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	6/48	€ 7,50
INH1G-041440BL2	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	6/48	€ 7,50
INH1G-042727BL2	E27	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	6/48	€ 7,50
INH1G-042740BL2	E27	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	6/48	€ 7,50
INM1-041427BL2	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
INM1-041440BL2	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
INTOR-041427BL2	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
INM1C-041427BL2	E14	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	6/48	€ 7,50
INM1C-041440BL2	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	6/48	€ 7,50

NEW

LED LIGHT SOURCES - FILAMENT

INCANTO

Blister

2 YEARS
WARRANTY



INH1G
SPHERE E14



INH1G
SPHERE E27



INM1
CANDLE E14

ADVANTAGES

Transparent bulbs with innovative LED filament technology that allows you to create an intimate and evocative atmosphere. Energy savings of 90%. Available in colour temperature 2700K and 4000K.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW INH1G-061427BL2	E14	6W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	6/48	€ 8,90
NEW INH1G-061440BL2	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	6/48	€ 8,90
NEW INH1G-062727BL2	E27	6W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	6/48	€ 8,90
NEW INH1G-062740BL2	E27	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	6/48	€ 8,90
NEW INM1-061427BL2	E14	6W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	6/48	€ 8,90
NEW INM1-061440BL2	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	6/48	€ 8,90

LED LIGHT SOURCES - FILAMENT

INCANTO

Blister



ADVANTAGES

Transparent bulbs with innovative LED filament technology that allows you to create an intimate and evocative atmosphere. Energy savings of 90%. Available in colour temperature 2700K and 4000K.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ING3-042727BL2	E27	4W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	60x105	25	6/48	€ 7,90
ING3-042740BL2	E27	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	60x105	30	6/48	€ 7,90
ING3-082727BL2	E27	8W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	360°	61mA	> 0,50	60x105	30	6/48	€ 9,50
ING3-082740BL2	E27	8W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	61mA	> 0,50	60x105	30	6/48	€ 9,50
ING3P-082727BL2	E27	8W	75W	1055Lm	2700K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	6/48	€ 11,90
ING3P-082740BL2	E27	8W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	6/48	€ 11,90
ING3-102727BL2	E27	10W	100W	1521Lm	2700K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	6/48	€ 14,50
ING3-102740BL2	E27	10W	100W	1521Lm	4000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	6/48	€ 14,50

LED LIGHT SOURCES - FILAMENT

INCANTO SATEN

Blister



INSH1G
SPHERE E14



INSH1G
SPHERE E27



INSM1
CANDLE E14



INSTOR
CANDLE E14



INSM1C
FLAME E14

ADVANTAGES

Satin-finished bulbs capable of generating soft and diffused light. Available in different colour temperatures. Saving 90% energy.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
INSH1G-041430BL2	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	6/48	€ 7,50
NEW INSH1G-041440BL2	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	6/48	€ 7,50
INSH1G-041460BL2	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	13	6/48	€ 7,50
INSH1G-042730BL2	E27	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	6/48	€ 7,50
NEW INSH1G-042740BL2	E27	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x80	13	6/48	€ 7,50
INSH1G-042760BL2	E27	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	45x76	19	6/48	€ 7,50
INSM1-041430BL2	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
NEW INSM1-041440BL2	E14	4W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
INSM1-041460BL2	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
INSTOR-041430BL2	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
INSTOR-041460BL2	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	35x98	14	6/48	€ 7,50
INSM1C-041430BL2	E14	4W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	6/48	€ 7,50
INSM1C-041460BL2	E14	4W	40W	470Lm	6000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,50	37x118	14	6/48	€ 7,50

NEW

LED LIGHT SOURCES - FILAMENT

INCANTO SATEN

Blister

2 YEARS
WARRANTY



INSH1G
SPHERE E14



INSH1G
SPHERE E27



INSM1
CANDLE E14

ADVANTAGES

Satin-finished bulbs capable of generating soft and diffused light. Available in different colour temperatures. Saving 90% energy.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW INSH1G-061430BL2	E14	6W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	6/48	€ 8,90
NEW INSH1G-061440BL2	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	6/48	€ 8,90
NEW INSH1G-061460BL2	E14	6W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	13	6/48	€ 8,90
NEW INSH1G-062730BL2	E27	6W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	6/48	€ 8,90
NEW INSH1G-062740BL2	E27	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	6/48	€ 8,90
NEW INSH1G-062760BL2	E27	6W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	45x76	19	6/48	€ 8,90
NEW INSM1-061430BL2	E14	6W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	6/48	€ 8,90
NEW INSM1-061440BL2	E14	6W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	6/48	€ 8,90
NEW INSM1-061460BL2	E14	6W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	52mA	> 0,50	35x98	14	6/48	€ 8,90

LED LIGHT SOURCES - FILAMENT

INCANTO SATEN

Blister



INSG3 8W - 10W
BULB E27



INSG3P 8W
BULB E27

ADVANTAGES

Satin-finished bulbs capable of generating a soft and diffused light. Available in different colour temperatures. Energy savings of 87%.

Characteristics

RA	25.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for decorative applications, home environments and generic lighting.

	Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
	INSG3-082730BL2	E27	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	6/48	€ 9,50
NEW	INSG3-082740BL2	E27	8W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	6/48	€ 9,50
	INSG3-082760BL2	E27	8W	60W	806Lm	6000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	6/48	€ 9,50
	INSG3P-082730BL2	E27	8W	75W	1055Lm	3000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	6/48	€ 11,90
NEW	INSG3P-082740BL2	E27	8W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x112	30	6/48	€ 11,90
	INSG3P-082760BL2	E27	8W	75W	1055Lm	6000K	220-240V/AC 50/60 Hz	360°	63mA	> 0,50	60x105	30	6/48	€ 11,90
	INSG3-102730BL2	E27	10W	100W	1521Lm	3000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	6/48	€ 14,50
NEW	INSG3-102740BL2	E27	10W	100W	1521Lm	4000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	6/48	€ 14,50
	INSG3-102760BL2	E27	10W	100W	1521Lm	6000K	220-240V/AC 50/60 Hz	360°	88mA	> 0,50	70x125	40	6/48	€ 14,50

**QUALITY
IS CLEAR AT
FIRST SIGHT**





Iconic lamps that incorporate all the power of innovation. High-quality lighting that comes within traditional forms and provides significant energy savings, reducing operating costs and safeguarding the environment.




LED LIGHT SOURCES

CLASSIC

HARMONY 95 · HARMONY 80 · CLASSICA · ONDA · ARIA PLUS ARIA
BOLD · ECOLINE · ARIA PLUS Blister · ONDA Blister

LED LIGHT SOURCES - CLASSIC
HARMONY 95
brilliant light

PRO
LINE



2 YEARS
WARRANTY



HRH1G
SPHERE E14

HRH1G
SPHERE E27

HRM1
CANDLE E14

HRG3
BULB E27

ADVANTAGES

It provides an excellent colour rendering and maximum brightness thanks to the Cri 95. It has a colour temperature of 2700K for an intimate and evocative atmosphere.

Characteristics

RA	25.000	on off	-85%	IP20	A+
CRI>95	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, bars and boutiques.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
HRH1G-061427	E14	6W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	180°	50mA	> 0,50	45x81	30	10/50	€ 4,90
HRH1G-062727	E27	6W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	180°	50mA	> 0,50	45x75	27	10/50	€ 4,90
HRM1-061427	E14	6W	40W	470Lm	2700K	220-240V/AC 50/60 Hz	180°	50mA	> 0,50	37x105	37	10/50	€ 4,90
HRG3-102727	E27	10W	60W	806Lm	2700K	220-240V/AC 50/60 Hz	240°	80mA	> 0,50	60x119	58	10/50	€ 6,20
HRG3-122727	E27	12W	75W	1055Lm	2700K	220-240V/AC 50/60 Hz	240°	95mA	> 0,50	60x119	62	10/50	€ 7,40
HRG3-152727	E27	15W	100W	1500Lm	2700K	220-240V/AC 50/60 Hz	240°	120mA	> 0,50	65x128	77	10/50	€ 8,90

LED LIGHT SOURCES - CLASSIC

HARMONY 95

brilliant light

PRO
LINE



HRK110
SPOTLIGHT GU10

HRK38
SPOTLIGHT GU10

ADVANTAGES

It provides an excellent colour rendering and maximum brightness thanks to the Cri 95. It has a colour temperature of 2700K for an intimate and evocative atmosphere.

Characteristics

RA	25.000	on off	-90%	IP20	A+
CRI>95	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, bars and boutiques.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
HRK110-051027	GU10	5W	50W	400Lm	2700K	220-240V/AC 50/60 Hz	110°	40mA	> 0,50	50x53	60	10/50	€ 5,50
HRK38-051027	GU10	5W	50W	340Lm	2700K	220-240V/AC 50/60 Hz	38°	40mA	> 0,50	50x53	60	10/50	€ 5,50

LED LIGHT SOURCES - CLASSIC HARMONY 80



ADVANTAGES

Maximum light quality and possibility to choose between different light colour temperatures. Energy savings of 85%.

Characteristics

RA	25.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, bars and boutiques.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
HR80G3-092730	E27	9W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	300°	74mA	> 0,50	60x112	32	10/50	€ 2,60
HR80G3-092740	E27	9W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	300°	74mA	> 0,50	60x112	32	10/50	€ 2,60
HR80G3-092764	E27	9W	60W	806Lm	6400K	220-240V/AC 50/60 Hz	300°	74mA	> 0,50	60x112	32	10/50	€ 2,60
HR80G3-112730	E27	11W	75W	1055Lm	3000K	220-240V/AC 50/60 Hz	300°	91mA	> 0,50	60x112	32	10/50	€ 3,10
HR80G3-112740	E27	11W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	300°	91mA	> 0,50	60x112	32	10/50	€ 3,10
HR80G3-112764	E27	11W	75W	1055Lm	6400K	220-240V/AC 50/60 Hz	300°	91mA	> 0,50	60x112	32	10/50	€ 3,10
HR80G3-152730	E27	15W	100W	1521Lm	3000K	220-240V/AC 50/60 Hz	300°	124mA	> 0,50	65x127	56	10/50	€ 5,30
HR80G3-152740	E27	15W	100W	1521Lm	4000K	220-240V/AC 50/60 Hz	300°	124mA	> 0,50	60x120	50	10/50	€ 5,30
HR80G3-152764	E27	15W	100W	1521Lm	6400K	220-240V/AC 50/60 Hz	300°	124mA	> 0,50	65x127	56	10/50	€ 5,30

LED LIGHT SOURCES - CLASSIC

CLASSICA

PRO
LINE



CLXH1G
SPHERE E14



CLXH1G
SPHERE E27



CLXM1
CANDLE E14



CLXM1C
CANDLE E14

ADVANTAGES

Available in different traditional shapes, it allows the creation of a warm and welcoming atmosphere thanks to a colour temperature of 3000K. Energy savings of 85%.

Characteristics

RA	30.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for home environments, living rooms, dining rooms and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
CLXH1G-041430	E14	4W	30W	322Lm	3000K	220-240V/AC 50/60 Hz	240°	40mA	> 0,50	45x80	19	10/50	€ 2,20
CLXH1G-042730	E27	4W	30W	322Lm	3000K	220-240V/AC 50/60 Hz	240°	40mA	> 0,50	45x80	19	10/50	€ 2,20
CLXM1-041430	E14	4W	30W	322Lm	3000K	220-240V/AC 50/60 Hz	240°	40mA	> 0,50	37x100	19	10/50	€ 2,20
CLXM1C-041430	E14	4W	30W	322Lm	3000K	220-240V/AC 50/60 Hz	240°	35mA	> 0,50	38x128	19	10/50	€ 2,20



ONH1G
SPHERE E14

ONH1G
SPHERE E27

ONM1
CANDLE E14

ONM1C
CANDLE E14

ADVANTAGES

Iconic bulbs available in different light colour temperatures. Energy savings of 85%.

Characteristics

RA	25.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for home environments, living rooms, dining rooms and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ONH1G-061430	E14	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	45x81	19	10/50	€ 2,40
ONH1G-061440	E14	6W	40W	510Lm	4000K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	45x81	19	10/50	€ 2,40
ONH1G-061465	E14	6W	40W	520Lm	6500K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	45x81	19	10/50	€ 2,40
ONH1G-062730	E27	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	45x81	19	10/50	€ 2,40
ONH1G-062740	E27	6W	40W	510Lm	4000K	220-240V/AC 50/60 Hz	200°	51mA	> 0,50	45x81	19	10/50	€ 2,40
ONH1G-062765	E27	6W	40W	520Lm	6500K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	45x81	19	10/50	€ 2,40
ONM1-061430	E14	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	240°	45mA	> 0,50	37x100	18	10/50	€ 2,40
ONM1-061440	E14	6W	40W	510Lm	4000K	220-240V/AC 50/60 Hz	240°	51mA	> 0,50	37x100	18	10/50	€ 2,40
ONM1-061465	E14	6W	40W	520Lm	6500K	220-240V/AC 50/60 Hz	240°	45mA	> 0,50	37x100	18	10/50	€ 2,40
ONM1C-061430	E14	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	240°	45mA	> 0,50	38x130	20	10/50	€ 2,40
ONM1C-061440	E14	6W	40W	510Lm	4000K	220-240V/AC 50/60 Hz	240°	51mA	> 0,50	38x130	28	10/50	€ 2,40
ONM1C-061465	E14	6W	40W	520Lm	6500K	220-240V/AC 50/60 Hz	240°	45mA	> 0,50	38x130	20	10/50	€ 2,40



**ONH1G
SPHERE E14**



**ONH1G
SPHERE E27**



**ONM1
CANDLE E14**

ADVANTAGES

The ceramic body improves the reliability and dissipation of heat, increasing the durability. It combines the use of opaque glass with traditional shapes. Over 100 Lumen per Watt.

Characteristics

RA	20.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

They are used for generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ONH1G-081430	E14	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x90	50	10/50	€ 4,90
ONH1G-081440	E14	8W	60W	830Lm	4000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x90	50	10/50	€ 4,90
ONH1G-081465	E14	8W	60W	850Lm	6500K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x90	50	10/50	€ 4,90
ONH1G-082730	E27	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x85	56	10/50	€ 4,90
ONH1G-082740	E27	8W	60W	830Lm	4000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x85	56	10/50	€ 4,90
ONH1G-082765	E27	8W	60W	850Lm	6500K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x85	56	10/50	€ 4,90
ONM1-081430	E14	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	37x110	48	10/50	€ 4,90
ONM1-081440	E14	8W	60W	830Lm	4000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	37x110	48	10/50	€ 4,90
ONM1-081465	E14	8W	60W	850Lm	6500K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	37x110	48	10/50	€ 4,90

LED LIGHT SOURCES - CLASSIC

ARIA PLUS

PRO
LINE



ADVANTAGES

A modern and versatile product that guarantees the maximum quality of light with the possibility to choose between different light colour temperatures. Energy savings of 86%.

Characteristics

RA	30.000	on off	-86%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for professional environments, boutiques, shops and hotels.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ARP-072730	E27	7W	50W	648Lm	3000K	220-240V/AC 50/60 Hz	270°	60mA	> 0,52	60x110	79	10/50	€ 3,90
ARP-072764	E27	7W	50W	648Lm	6400K	220-240V/AC 50/60 Hz	270°	60mA	> 0,52	60x129	96	10/50	€ 3,90
ARP-102730	E27	10W	65W	882Lm	3000K	220-240V/AC 50/60 Hz	270°	70mA	> 0,53	60x110	74	10/50	€ 4,90
ARP-102740	E27	10W	65W	882Lm	4000K	220-240V/AC 50/60 Hz	270°	70mA	> 0,53	60x110	74	10/50	€ 4,90
ARP-102764	E27	10W	65W	882Lm	6400K	220-240V/AC 50/60 Hz	270°	70mA	> 0,53	60x110	74	10/50	€ 4,90
ARP-122730	E27	12W	75W	1068Lm	3000K	220-240V/AC 50/60 Hz	220°	94mA	> 0,55	60x120	109	10/50	€ 5,90
ARP-122740	E27	12W	75W	1068Lm	4000K	220-240V/AC 50/60 Hz	220°	94mA	> 0,55	60x120	109	10/50	€ 5,90
ARP-122764	E27	12W	75W	1068Lm	6400K	220-240V/AC 50/60 Hz	220°	94mA	> 0,55	60x120	74	10/50	€ 5,90

LED LIGHT SOURCES - CLASSIC

ARIA PLUS

PRO
LINE



ADVANTAGES

A modern and versatile product that guarantees maximum quality of light with the possibility to choose between different light colour temperatures. Energy savings of 85%.

Characteristics

RA	30.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for professional environments, boutiques, shops and hotels.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ARP-152730	E27	15W	100W	1521Lm	3000K	220-240V/AC 50/60 Hz	270°	117mA	> 0,50	60x129	96	10/50	€ 7,40
ARP-152740	E27	15W	100W	1521Lm	4000K	220-240V/AC 50/60 Hz	270°	117mA	> 0,50	60x129	96	10/50	€ 7,40
ARP-152764	E27	15W	100W	1521Lm	6400K	220-240V/AC 50/60 Hz	270°	117mA	> 0,50	60x129	96	10/50	€ 7,40
ARP-182730	E27	18W	110W	1861Lm	3000K	220-240V/AC 50/60 Hz	270°	142mA	> 0,50	60x129	126	10/50	€ 9,40
ARP-182740	E27	18W	110W	1861Lm	4000K	220-240V/AC 50/60 Hz	270°	142mA	> 0,50	60x129	126	10/50	€ 9,40
ARP-182764	E27	18W	110W	1861Lm	6400K	220-240V/AC 50/60 Hz	270°	142mA	> 0,50	60x129	126	10/50	€ 9,40
ARP-242730	E27	24W	140W	2200Lm	3000K	220-240V/AC 50/60 Hz	270°	200mA	> 0,50	80x160	206	10/40	€ 12,70
ARP-242740	E27	24W	140W	2300Lm	4000K	220-240V/AC 50/60 Hz	270°	200mA	> 0,50	80x160	206	10/40	€ 12,70
ARP-242764	E27	24W	140W	2452Lm	6400K	220-240V/AC 50/60 Hz	270°	200mA	> 0,50	80x160	206	10/40	€ 12,70

LED LIGHT SOURCES - CLASSIC

ARIA PLUS



Low voltage

12-24V
AC/DC

ADVANTAGES

Low voltage lamp with 12-24V AC/DC range of use. A modern and versatile product that guarantees maximum quality of light with the possibility to choose between different light colour temperatures. Energy savings of 84%.

Characteristics

RA	30.000	on off	-84%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

The best solution for boat, camper, cabin, workshop and every isolated application powered by 12-24V.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ARP-122430	E27	12W	75W	1055Lm	3000K	12-24V AC/DC 50/60 Hz	270°	470mA	> 0,50	60x119	110	10/50	€ 11,90
ARP-122440	E27	12W	75W	1055Lm	4000K	12-24V AC/DC 50/60 Hz	270°	470mA	> 0,50	60x119	110	10/50	€ 11,90

LED LIGHT SOURCES - CLASSIC

ARIA PLUS



ARP
BULB E14

ADVANTAGES

Available in different colour temperatures. Energy savings of 85%.

Characteristics

RA	30.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for hotels, shops, bars and professional environments.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ARP-091430	E14	9W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	300°	76mA	> 0,50	60x112	57	10/50	€ 3,90
ARP-091464	E14	9W	60W	806Lm	6400K	220-240V/AC 50/60 Hz	300°	76mA	> 0,50	60x112	57	10/50	€ 3,90

LED LIGHT SOURCES - CLASSIC

ARIA BOLD

2 YEARS
WARRANTY



ADVANTAGES

Available in different colour temperatures. It stands out for its elegant design. ARBD-182730 is dimmable with trailing-edge or LED Dimmer systems. Energy savings of 84%.

Characteristics

RA	30.000	on off	-84%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

The best solution for living rooms, dining rooms, home environments and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ARB-182730	E27	18W	110W	1710Lm	3000K	220-240V/AC 50/60 Hz	220°	85mA	> 0,90	100x136	260	6/24	€ 18,90
ARB-182740	E27	18W	110W	1710Lm	4000K	220-240V/AC 50/60 Hz	220°	85mA	> 0,90	100x136	260	6/24	€ 18,90
ARBD-182730	E27	18W	110W	1710Lm	3000K	220-240V/AC 50/60 Hz	220°	85mA	> 0,90	100x136	260	6/24	€ 27,50

LED LIGHT SOURCES - CLASSIC

ARIA BOLD



ADVANTAGES

Available in different colour temperatures. It stands out for its elegant design. Energy savings of 83%.

Characteristics

RA	30.000	on off	-83%	IP20	A+
CRI>82	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

The best solution for living rooms, dining rooms, home environments and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ARB-202730	E27	20W	120W	1800Lm	3000K	220-240V/AC 50/60 Hz	200°	169mA	> 0,50	120x156	205	6/24	€ 15,50
ARB-202740	E27	20W	120W	1800Lm	4000K	220-240V/AC 50/60 Hz	200°	169mA	> 0,50	120x156	220	6/24	€ 15,50
NEW ARB-202760	E27	20W	120W	1800Lm	6000K	220-240V/AC 50/60 Hz	200°	169mA	> 0,50	120x156	205	6/24	€ 15,50
ARB-242730	E27	24W	130W	2100Lm	3000K	220-240V/AC 50/60 Hz	310°	198mA	> 0,50	128x168	275	6/24	€ 17,90
ARB-242740	E27	24W	130W	2130Lm	4000K	220-240V/AC 50/60 Hz	310°	198mA	> 0,50	130x168	262	6/24	€ 17,90
ARB-242760	E27	24W	130W	2150Lm	6000K	220-240V/AC 50/60 Hz	310°	198mA	> 0,50	130x168	262	6/24	€ 17,90




ELH1G
SPHERE E14



ELH1G
SPHERE E27



ELM1
CANDLE E14

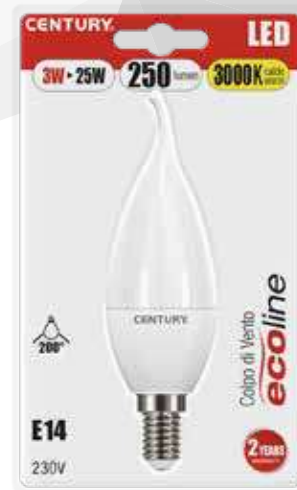

ELM1C
CANDLE E14

ADVANTAGES

Available in different colour temperatures. Saving 84%.

Characteristics

RA	25.000	on off	-84%	IP20	A+
CRI > 80	Lifetime (hours)	≥ 15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

The best solution for living rooms, dining rooms, home environments and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ELH1G-031430BL	E14	3W	25W	250Lm	3000K	220-240V/AC 50/60 Hz	220°	35mA	> 0,40	45x80	25	12/48	€ 2,20
ELH1G-031464BL	E14	3W	25W	250Lm	6400K	220-240V/AC 50/60 Hz	220°	35mA	> 0,40	45x80	25	12/48	€ 2,20
ELH1G-032730BL	E27	3W	25W	250Lm	3000K	220-240V/AC 50/60 Hz	220°	35mA	> 0,40	45x80	25	12/48	€ 2,20
ELH1G-032764BL	E27	3W	25W	250Lm	6400K	220-240V/AC 50/60 Hz	220°	35mA	> 0,40	45x80	25	12/48	€ 2,20
ELM1-031430BL	E14	3W	25W	250Lm	3000K	220-240V/AC 50/60 Hz	200°	35mA	> 0,40	37x100	19	12/48	€ 2,20
ELM1-031464BL	E14	3W	25W	250Lm	6400K	220-240V/AC 50/60 Hz	200°	35mA	> 0,40	37x100	19	12/48	€ 2,20
ELM1C-031430BL	E14	3W	25W	250Lm	3000K	220-240V/AC 50/60 Hz	200°	35mA	> 0,40	37x123	26	12/48	€ 2,20
ELM1C-031464BL	E14	3W	25W	250Lm	6400K	220-240V/AC 50/60 Hz	200°	35mA	> 0,40	37x123	26	12/48	€ 2,20


ELH1G
SPHERE E14

ELH1G
SPHERE E27

ELM1
CANDLE E14

ELM1C
CANDLE E14

ELK110
SPOTLIGHT GU10

ADVANTAGES

Available in different colour temperatures. Energy savings of 85%.

Characteristics

RA	25.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

The best solution for living rooms, dining rooms, home environments and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ELH1G-061430BL	E14	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	220°	45mA	> 0,50	45x80	25	12/48	€ 2,50
ELH1G-061464BL	E14	6W	40W	470Lm	6400K	220-240V/AC 50/60 Hz	220°	45mA	> 0,50	45x80	25	12/48	€ 2,50
ELH1G-062730BL	E27	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	220°	45mA	> 0,50	45x80	25	12/48	€ 2,50
ELH1G-062764BL	E27	6W	40W	470Lm	6400K	220-240V/AC 50/60 Hz	220°	45mA	> 0,50	45x80	25	12/48	€ 2,50
ELM1-061430BL	E14	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	37x100	19	12/48	€ 2,50
ELM1-061464BL	E14	6W	40W	470Lm	6400K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	37x100	19	12/48	€ 2,50
ELM1C-061430BL	E14	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	37x123	26	12/48	€ 2,50
ELM1C-061464BL	E14	6W	40W	470Lm	6400K	220-240V/AC 50/60 Hz	200°	45mA	> 0,50	37x123	26	12/48	€ 2,50
ELK110-061030BL	GU10	6W	50W ALO	470Lm	3000K	220-240V/AC 50/60 Hz	110°	45mA	> 0,50	50x54	27	12/48	€ 3,40
ELK110-061064BL	GU10	6W	50W ALO	470Lm	6400K	220-240V/AC 50/60 Hz	120°	45mA	> 0,50	50x54	27	12/48	€ 3,40



ADVANTAGES

Available in different colour temperatures. Energy savings of 85%.

Characteristics

RA	25.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

The best solution for living rooms, dining rooms, home environments and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ELG3-062730BL	E27	6W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	220°	45mA	> 0,50	60x112	33	12/48	€ 2,60
ELG3-062764BL	E27	6W	40W	470Lm	6400K	220-240V/AC 50/60 Hz	220°	45mA	> 0,50	60x112	33	12/48	€ 2,60
ELG3-092730BL	E27	9W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	220°	70mA	> 0,50	60x112	33	12/48	€ 3,10
ELG3-092764BL	E27	9W	60W	806Lm	6400K	220-240V/AC 50/60 Hz	220°	70mA	> 0,50	60x112	33	12/48	€ 3,10
ELG3-122730BL	E27	12W	75W	1050Lm	3000K	220-240V/AC 50/60 Hz	220°	91mA	> 0,50	60x112	33	12/48	€ 3,60
ELG3-122764BL	E27	12W	75W	1050Lm	6400K	220-240V/AC 50/60 Hz	220°	91mA	> 0,50	60x112	33	12/48	€ 3,60
ELG3-152730BL	E27	15W	100W	1521Lm	3000K	220-240V/AC 50/60 Hz	220°	124mA	> 0,50	60x120	50	12/48	€ 5,50
ELG3-152764BL	E27	15W	100W	1521Lm	6400K	220-240V/AC 50/60 Hz	220°	124mA	> 0,50	60x120	50	12/48	€ 5,50

**ADVANTAGES**

A modern and versatile product that guarantees maximum quality of light with the possibility to choose between different light colour temperatures. Energy savings of 84%.

Characteristics

RA	30.000	on off	-84%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for hotels, shops, boutiques and professional environments.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ARP-182730BL	E27	18W	110W	1700Lm	3000K	220-240V/AC 50/60 Hz	270°	142mA	> 0,50	60x129	126	6/24	€ 9,40
ARP-182764BL	E27	18W	110W	1700Lm	6400K	220-240V/AC 50/60 Hz	270°	142mA	> 0,50	60x129	126	6/24	€ 9,40
ARP-242730BL	E27	24W	140W	2200Lm	3000K	220-240V/AC 50/60 Hz	270°	200mA	> 0,50	80x160	206	6/24	€ 13,90
ARP-242764BL	E27	24W	140W	2200Lm	6400K	220-240V/AC 50/60 Hz	270°	200mA	> 0,50	80x160	206	6/24	€ 13,90

ONDA

Blister



ONH1G
SPHERE E14



ONH1G
SPHERE E27



ONM1
CANDLE E14

ADVANTAGES

The ceramic body improves the reliability and dissipation of heat, increasing the lifespan. It combines traditional shapes with the use of opal glass. Over 100 Lumen per Watt.

Characteristics

RA	20.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

They are used for generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ONH1G-081430BL	E14	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x90	50	12/48	€ 4,90
ONH1G-081465BL	E14	8W	60W	850Lm	6500K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x90	50	12/48	€ 4,90
ONH1G-082730BL	E27	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x85	56	12/48	€ 4,90
ONH1G-082765BL	E27	8W	60W	850Lm	6500K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	45x85	56	12/48	€ 4,90
ONM1-081430BL	E14	8W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	37x110	48	12/48	€ 4,90
ONM1-081465BL	E14	8W	60W	850Lm	6500K	220-240V/AC 50/60 Hz	180°	71mA	> 0,50	37x110	48	12/48	€ 4,90



THE **SOLUTION** FOR EVERY **ENVIRONMENT**





Their great versatility means that they can be used with the same aesthetic and practical results in completely different spaces: home environments, shops, stores and museums benefit from their extraordinary ability to illuminate and enhance.



LED LIGHT SOURCES

SPOTLIGHT

SPOT MAXILED · SPOT MULTILED · LEXAR 38 ·
DICO SHOP 95 · LEXAR 110 · LEXAR 60

SPOT MAXILED

SPOT MULTILED


**PRO
LINE**


K12XLED
SPOTLIGHT MR11



K12XLED
SPOTLIGHT MR11



K2T7LED
SPOTLIGHT GU10

ADVANTAGES

Available in different colour temperatures, they are suitable for both accent and generic lighting. K12XLED-300430 powered by electromagnetic and non-electronic transformers. Energy savings of 85%.

Characteristics

RA	30.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable for home environments, shops, accent lighting and museums.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
K12XLED-300430	MR11	3W	20W ALO	185Lm	3000K	12-24V AC/DC 50/60 Hz	30°	250mA	> 0,80	35x38	13	6/24	€ 9,40
NEW K12XLED-300430BL	MR11	3W	20W	185Lm	3000K	12-24V AC/DC 50/60 Hz	30°	250mA	> 0,80	35x38	13	6/24	€ 9,40
NEW K12XLED-300440	MR11	3W	20W	185Lm	4000K	12-24V AC/DC 50/60 Hz	30°	250mA	> 0,80	35x38	13	6/24	€ 9,40
NEW K12XLED-300440BL	MR11	3W	20W	185Lm	4000K	12-24V AC/DC 50/60 Hz	30°	250mA	> 0,80	35x38	13	6/24	€ 9,40
K2T7LED-071030	GU10	7W	50W ALO	480Lm	3000K	220-240V/AC 50/60 Hz	120°	89mA	> 0,50	50x60	25	6/24	€ 2,90
K2T7LED-071040	GU10	7W	50W ALO	480Lm	4000K	220-240V/AC 50/60 Hz	120°	89mA	> 0,50	50x60	25	6/24	€ 2,90
K2T7LED-071060	GU10	7W	50W ALO	480Lm	6000K	220-240V/AC 50/60 Hz	120°	89mA	> 0,50	50x60	25	6/24	€ 2,90

LEXAR 38

DICRO
SHOP 95PRO
LINELX38
SPOTLIGHT GU10DSD
SPOTLIGHT GU10NOW ALSO IN
12-DEGREE BEAM
ANGLE!

ADVANTAGES

The Colour Rendering Index (CRI) measures how natural the colours of objects appear. This value varies from 0 to 100. Index of 95-100% indicates maximum brilliance and color rendering. DICRO SHOP 95 is dimmable with trailing-edge or LED Dimmer systems.

Characteristics

RA	25.000	on off	-88%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable for home environments, shops, accent lighting and museums.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
LX38-061030	GU10	6W	50W ALO	425Lm	3000K	220-240V/AC 50/60 Hz	38°	64mA	> 0,50	50x54	31	10/50	€ 3,60
LX38-061040	GU10	6W	50W ALO	440Lm	4000K	220-240V/AC 50/60 Hz	38°	64mA	> 0,50	50x54	31	10/50	€ 3,60
LX38-061060	GU10	6W	50W ALO	450Lm	6000K	220-240V/AC 50/60 Hz	38°	64mA	> 0,50	50x54	31	10/50	€ 3,60
LX38-081030	GU10	8W	60W ALO	500Lm	3000K	220-240V/AC 50/60 Hz	38°	85mA	> 0,50	50x54	41	10/50	€ 4,30
NEW LX38-081040	GU10	8W	60W ALO	515Lm	4000K	220-240V/AC 50/60 Hz	38°	85mA	> 0,50	50x54	41	10/50	€ 4,30
LX38-081060	GU10	8W	60W ALO	530Lm	6000K	220-240V/AC 50/60 Hz	38°	85mA	> 0,50	50x54	32	10/50	€ 4,30
DSD-063830	GU10	6W	50W ALO	440Lm	3000K	220-240V/AC 50/60 Hz	38°	34mA	> 0,82	50x54	41	10/50	€ 7,00
DSD-063840	GU10	6W	50W ALO	450Lm	4000K	220-240V/AC 50/60 Hz	38°	34mA	> 0,82	50x54	41	10/50	€ 7,00
DSD-063860	GU10	6W	50W ALO	460Lm	6000K	220-240V/AC 50/60 Hz	38°	34mA	> 0,82	50x54	41	10/50	€ 7,00
NEW DSD-061230	GU10	6,5W	50W ALO	550Lm	3000K	220-240V/AC 50/60 Hz	12°	100mA	> 0,90	50x54	64	10/50	€ 17,90
NEW DSD-061240	GU10	6,5W	50W ALO	550Lm	4000K	220-240V/AC 50/60 Hz	12°	100mA	> 0,90	50x54	64	10/50	€ 17,90

LED LIGHT SOURCES - SPOTLIGHT

LEXAR 110

PRO
LINE



ADVANTAGES

Available in different colour temperatures, they are suitable for both accent and generic lighting. Energy savings of 88%.

Characteristics

RA	25.000	on off	-88%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable for home environments, shops, accent lighting and museums.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
LX110-061030	GU10	6W	50W ALO	450Lm	3000K	220-240V/AC 50/60 Hz	110°	64mA	> 0,50	50x54	31	10/50	€ 3,60
LX110-061040	GU10	6W	50W ALO	465Lm	4000K	220-240V/AC 50/60 Hz	110°	64mA	> 0,50	50x54	31	10/50	€ 3,60
LX110-061060	GU10	6W	50W ALO	475Lm	6000K	220-240V/AC 50/60 Hz	110°	64mA	> 0,50	50x54	31	10/50	€ 3,60
LX110-081030	GU10	8W	60W ALO	550Lm	3000K	220-240V/AC 50/60 Hz	110°	85mA	> 0,50	50x54	32	10/50	€ 4,30
NEW LX110-081040	GU10	8W	60W ALO	560Lm	4000K	220-240V/AC 50/60 Hz	110°	85mA	> 0,50	50x54	32	10/50	€ 4,30
LX110-081060	GU10	8W	60W ALO	570Lm	6000K	220-240V/AC 50/60 Hz	110°	85mA	> 0,50	50x54	32	10/50	€ 4,30

LED LIGHT SOURCES - SPOTLIGHT

LEXAR 60

PRO
LINE



ADVANTAGES

rent colour temperatures, they are suitable for both accent and generic lighting. Powered by electromagnetic and non-electronic transformers. Energy savings of 85%.

Characteristics

RA	25.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable for home environments, shops, accent lighting and museums.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
LX60-065330	GU5.3	6W	40W ALO	385Lm	3000K	12V AC/DC 50/60 Hz	60°	640mA	> 0,50	50x46	34	10/50	€ 5,50
NEW LX60-065340	GU5.3	6W	40W ALO	395Lm	4000K	12V AC/DC 50/60 Hz	60°	640mA	> 0,50	50x46	34	10/50	€ 5,50
LX60-065360	GU5.3	6W	40W ALO	405Lm	6000K	12V AC/DC 50/60 Hz	60°	640mA	> 0,50	50x46	26	10/50	€ 5,50
LX60-085330	GU5.3	8W	50W ALO	470Lm	3000K	12V AC/DC 50/60 Hz	60°	850mA	> 0,50	50x46	34	10/50	€ 6,20
NEW LX60-085340	GU5.3	8W	50W ALO	485Lm	4000K	12V AC/DC 50/60 Hz	60°	850mA	> 0,50	50x46	34	10/50	€ 6,20
LX60-085360	GU5.3	8W	50W ALO	500Lm	6000K	12V AC/DC 50/60 Hz	60°	850mA	> 0,50	50x46	34	10/50	€ 6,20



Their best advantage is to be able to adapt to each particular application. They are special just because they know how to ensure maximum functionality through traditional forms, guaranteeing maximum energy savings.



LED LIGHT SOURCES

SPECIAL

PIXY · FRIDGE LAMP · KILLER 50 · VOTIVE LAMP · EXA ·
ZAPHIRA · TRE-D · TRE-D SLIM · ARIA MULTICOLOR · SENSOR ·
CIRCOLINA LED · KILLER 50 Blister · SENSOR Blister

LED LIGHT SOURCES - SPECIAL PIXY

2 YEARS
WARRANTY



PIXYFULL 1,5W
G4



PIXYFULL 3W
G4



PIXYPLT
G4

ADVANTAGES

Thanks to its transparent and elegant design, it produces a brilliant light, giving a natural effect to its surroundings. It is powered by electromagnetic and non-electronic transformers. Energy savings of 90%.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>82	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Designed for decorative applications, accent lighting that creates atmosphere throughout the house, waiting rooms, offices, shops and restaurants.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PIXYFULL-150430	G4	1,5W	15W ALO	120Lm	3000K	12V AC/DC 50/60 Hz	360°	150mA	> 0,50	12x38	3	12/96	€ 4,60
NEW PIXYFULL-150440	G4	1,5W	15W ALO	120Lm	4000K	12V AC/DC 50/60 Hz	360°	150mA	> 0,50	12x38	3	12/96	€ 4,60
PIXYFULL-150464	G4	1,5W	15W ALO	120Lm	6400K	12V AC/DC 50/60 Hz	360°	150mA	> 0,50	12x38	3	12/96	€ 4,60
PIXYFULL-030430	G4	3W	35W ALO	305Lm	3000K	12V AC/DC 50/60 Hz	360°	332mA	> 0,60	14x42	7	12/96	€ 5,30
PIXYPLT-020430	G4	2W	20W ALO	170Lm	3000K	10-30V DC/10-20V AC 50/60 Hz	180°	210mA	≥0,50	30x39	4	12/96	€ 4,60

LED LIGHT SOURCES - SPECIAL PIXY



PIXYFULL 3W
G9

PIXYFULL 3,5W
G9

PIXYFULL 4W
G9

ADVANTAGES

Thanks to its transparent and elegant design, it produces a brilliant light, giving a natural effect to its surroundings. 90% energy savings.

Characteristics

RA	25.000	on off	-90%	IP20	A++
CRI>82	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Designed for decorative applications, accent lighting that creates atmosphere throughout the house, waiting rooms, offices, shops and restaurants.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PIXYFULL-030930	G9	3W	30W ALO	270Lm	3000K	230V/AC 50/60 Hz	360°	23mA	> 0,50	15x44	11	12/96	€ 4,90
NEW PIXYFULL-030940	G9	3W	30W ALO	270Lm	4000K	230V/AC 50/60 Hz	360°	23mA	> 0,50	15x44	11	12/96	€ 4,90
PIXYFULL-030964	G9	3W	30W ALO	270Lm	6400K	230V/AC 50/60 Hz	360°	23mA	> 0,50	15x44	11	12/96	€ 4,90
PIXYFULL-350930	G9	3,5W	35W ALO	300Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,40	16x50	11	12/96	€ 5,30
PIXYFULL-040930	G9	4W	40W ALO	450Lm	3000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,40	16x60	14	12/96	€ 6,90
NEW PIXYFULL-040940	G9	4W	40W ALO	450Lm	4000K	220-240V/AC 50/60 Hz	360°	35mA	> 0,40	16x60	12	12/96	€ 6,90
NEW PIXYFULL-040964	G9	4W	40W ALO	450Lm	6400K	220-240V/AC 50/60 Hz	360°	35mA	> 0,40	16x60	12	12/96	€ 6,90

LED LIGHT SOURCES - SPECIAL FRIDGE LAMP



ADVANTAGES

It saves 88% of its energy, reducing operating costs in full respect of the environment without sacrificing the convenience of use.

Characteristics

RA	20.000	on off	-88%	IP20	A++
CRI>80	Lifetime (hours)	≥7.500 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable for abat-jour, refrigerator and home applications.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
FGF-011427	E14	1,8W	15W	130Lm	2700K	220-240V/AC 50/60 Hz	270°	12mA	> 0,50	18x50	9	12/48	€ 3,90
FGF-011450	E14	1,8W	15W	130Lm	5000K	220-240V/AC 50/60 Hz	270°	12mA	> 0,50	18x50	9	12/48	€ 3,90

LED LIGHT SOURCES - SPECIAL KILLER 50



ADVANTAGES

Mosquitoes are attracted to UV infrared rays, and the yellow lamp filters the rays creating a wavelength (590nm) that keeps them away. The LED generates less heat than a conventional light bulb, maximizing the repellent effect. Created with fireproof material, it is harmless to people or pets.

APPLICATIONS

Ideal for dwellings, gazebos, terraces, arcades, gardens, verandas and terraces.

Characteristics

RA	15.000	on off	-82%	IP20	A+
CRI>80	Lifetime (hours)	≥10.000 Switches	Savings	Degree of protection	Energetic class

FOR SALE WITH THE EXHIBITOR THAT CONTAINS 25 PCS

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
KLRSC-092700	E27	9W	50W	650Lm	2200K	220-240V/AC 50/60 Hz	230°	81mA	> 0,50	60x110	39	1/25	€ 8,90

NEW

LED LIGHT SOURCES - SPECIAL VOTIVE LAMP

2 YEARS
WARRANTY



ADVANTAGES

It significantly reduces energy consumption, always ensuring a long life. High-quality and practical, it integrates perfectly with the surrounding environment by illuminating the spaces always with the same effectiveness.

Characteristics

RA	-88%	IP20	A++
CRI>80	Savings	Degree of protection	Energetic class

APPLICATIONS

The right solution for sacred and commemorative places.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW VTV-052427	E14	0,5W	-	50Lm	2700K	24V AC/DC 50/60 Hz	-	10mA	> 0,50	-	-	10/50	€ 2,00



EXA
LINEAR R7S

ZH
LINEAR R7S

ADVANTAGES

The dimmerability allows you to adjust the lighting and create the desired atmosphere, available in different light colour temperatures. ZH-101230 is dimmable with trailing-edge or LED Dimmer systems. Energy savings of 90%.

Characteristics

RA	25.000	on off	-90%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class


APPLICATIONS

Great solution for ceiling lights, floor lamps, appliques and generic lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
EXA-050830	R7S	5W	50W ALO	500Lm	3000K	220-240V/AC 50/60 Hz	240°	45mA	> 0,50	51x78x31	50	6/24	€ 7,90
EXA-101230	R7S	10W	100W ALO	1000Lm	3000K	220-240V/AC 50/60 Hz	240°	90mA	> 0,50	51x118x31	95	6/24	€ 10,90
EXA-101240	R7S	10W	100W ALO	1000Lm	4000K	220-240V/AC 50/60 Hz	240°	90mA	> 0,50	51x118x31	95	6/24	€ 10,90
EXA-151840	R7S	15W	200W ALO	1400Lm	4000K	220-240V/AC 50/60 Hz	240°	130mA	> 0,50	51x189x31	148	6/24	€ 16,90
ZH-101230	R7S	10W	80W ALO	975Lm	3000K	220-240V/AC 50/60 Hz	120°	45mA	> 0,98	51x118x21	73	6/24	€ 19,90

NEW

LED LIGHT SOURCES - SPECIAL TRE-D



TR
LINEARE R7S



TRD
LINEARE R7S

ADVANTAGES

It is perfect to create the right atmosphere. LED technology guarantees 90% savings and safeguards the environment. Coating is in PC. Available in warm and cold colour temperatures. Also available in the dimmable version.

Characteristics

RA	30.000	on off	-90%	I	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for living rooms, corridors and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW TR-1511830BL	R7S	15W	160W	1800Lm	3000K	220-240V/AC 50/60 Hz	360°	113mA	> 0,50	29x118	65	6/24	€ 16,90
NEW TR-1511840BL	R7S	15W	160W	1800Lm	4000K	220-240V/AC 50/60 Hz	360°	113mA	> 0,50	29x118	65	6/24	€ 16,90
NEW TRD-1211830BL	R7S	12W	120W	1600Lm	3000K	220-240V/AC 50/60 Hz	360°	55mA	> 0,90	29x118	67	6/24	€ 21,00
NEW TRD-1211840BL	R7S	12W	120W	1600Lm	4000K	220-240V/AC 50/60 Hz	360°	55mA	> 0,90	29x118	67	6/24	€ 21,00



The products
are in blister pack

NEW

LED LIGHT SOURCES - SPECIAL TRE-D SLIM



TR5
5W



TR8
8W

ADVANTAGES

It lights up creating the right atmosphere. LED technology saves 90% and contributes to the protection of the environment. Possibility to choose between warm tones and cold tones. Energy class A.

Characteristics

RA	30.000	on off	-90%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Suitable for living rooms, hallways and general lighting.

13MM DIAMETER

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW TRS-057830	R7S	5W	50W ALO	500Lm	3000K	220-240V/AC 50/60 Hz	360°	23mA	> 0,90	13x78	14	6/24	€ 8,90
NEW TRS-057830BL	R7S	5W	50W ALO	500Lm	3000K	220-240V/AC 50/60 Hz	360°	23mA	> 0,90	13x78	14	6/24	€ 8,90
NEW TRS-0811830	R7S	8W	75W ALO	960Lm	3000K	220-240V/AC 50/60 Hz	360°	33mA	> 0,90	14x118	14	6/24	€ 11,50
NEW TRS-0811830BL	R7S	8W	60W ALO	800Lm	3000K	220-240V/AC 50/60 Hz	360°	36mA	> 0,90	14x118	20	6/24	€ 10,90



Also available
in blister pack

NEW

LED LIGHT SOURCES - SPECIAL

ARIA MULTICOLOR

Dimmable

2 YEARS
WARRANTY



ADVANTAGES

Multicolour lamp with remote control. You can adjust the light intensity, select colours or light games. You can also set the white mode 4000K.

Characteristics

RA	25.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for home environments and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW G3RGBW-092740	E27	9W	60W	806Lm	RGB-4000K	220-240V/AC 50/60 Hz	240°	70mA	≥0,50	60x109	50	10/50	€ 16,90



Remote control included:

- Change the colours
- Adjust light intensity
- Fast change mode
- Gradual change mode

Packed in blister





Remote control

Pure white, high brightness

Millions of colours

Dimmable



LED LIGHT SOURCES - SPECIAL SENSOR

2 YEARS
WARRANTY



ADVANTAGES

The lamp automatically switches on in the night and switches off in the day to save power. Available in different colour temperatures, it ensures a comfortable and welcoming atmosphere.

Characteristics

RA	30.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Wherever a constant night light is needed.

AUTOMATIC SWITCH-ON AT NIGHT

AUTOMATIC SWITCH-OFF DURING THE DAY

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
G3SP-102730	E27	10W	75W	1060Lm	3000K	220-240V/AC 50/60 Hz	200°	90mA	> 0,50	60x110	47	6/24	€ 11,90
G3SP-102740	E27	10W	75W	1060Lm	4000K	220-240V/AC 50/60 Hz	200°	90mA	> 0,50	60x110	47	6/24	€ 11,90
G3SP-102764	E27	10W	75W	1100Lm	6400K	220-240V/AC 50/60 Hz	200°	90mA	> 0,50	60x110	47	6/24	€ 11,90

LED LIGHT SOURCES - SPECIAL CIRCOLINA LED



ADVANTAGES

Dual mounting system: magnet fixation - that eliminates the need to make holes, making it easier to install inside the pre-existing ceiling lights - or classical screw fastening. Energy savings of 83%.

Characteristics

RA	25.000	on off	-83%		IP20	LED	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Created to replace the lighting of a light fixture.

QUICK INSTALLATION WITH MAGNETS

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
CRL-1218030	-	12W	70W	1050Lm	3000K	220-240V/AC 50/60 Hz	180°	105mA	> 0,50	180x25	113	6/24	€ 13,90
CRL-1218040	-	12W	70W	1050Lm	4000K	220-240V/AC 50/60 Hz	180°	105mA	> 0,50	180x25	113	6/24	€ 13,90
CRL-1821830	-	18W	100W	1650Lm	3000K	220-240V/AC 50/60 Hz	180°	154mA	> 0,50	218x25	160	6/24	€ 16,90
CRL-1821840	-	18W	100W	1650Lm	4000K	220-240V/AC 50/60 Hz	180°	154mA	> 0,50	218x25	160	6/24	€ 16,90
CRL-2425330	-	24W	120W	2100Lm	3000K	220-240V/AC 50/60 Hz	180°	191mA	> 0,50	253x25	190	6/24	€ 19,90
CRL-2425340	-	24W	120W	2100Lm	4000K	220-240V/AC 50/60 Hz	180°	191mA	> 0,50	253x25	190	6/24	€ 19,90

**ADVANTAGES**

Mosquitoes are attracted to UV infrared rays, and the yellow lamp filters the rays, creating a wavelength (590nm) that keeps them away. The LED generates less heat than a conventional light bulb, maximizing the repellent effect. Created with fireproof material, it is harmless to people or pets.

Characteristics

RA	15.000	on off	-82%	IP20	A+
CRI>80	Lifetime (hours)	≥10.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for dwellings, gazebos, terraces, arcades, gardens, verandas and terraces.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
KLRBL-092700	E27	9W	50W	650Lm	2200K	220-240V/AC 50/60 Hz	230°	81mA	> 0,50	60x110	39	6/24	€ 8,90

**ADVANTAGES**

The lamp automatically switches on in the night and switches off in the day to save power. Available in different colour temperatures, it ensures a comfortable and welcoming atmosphere.

Characteristics

RA	30.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Wherever a constant night light is needed.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
G3SP-102730BL	E27	10W	75W	1060Lm	3000K	220-240V/AC 50/60 Hz	200°	90mA	> 0,50	60x110	47	6/24	€ 11,90
G3SP-102764BL	E27	10W	75W	1100Lm	6400K	220-240V/AC 50/60 Hz	200°	90mA	> 0,50	60x110	47	6/24	€ 11,90



A professional environment needs a professional type of lighting. Performance, durability and energy savings are the key features of professional LED lamps, able to illuminate spaces in the most functional way.



LED LIGHT SOURCES

PROFESSIONAL

PL-COVER · GXLED · CITY LAMP · SUPERLED
SERIE LIGHT · SAPHIRLED · LOTUS 70
MAXIMA · MAXIMA ROUND · PLOSE360 · PAR56

LED LIGHT SOURCES - PROFESSIONAL

PL-COVER



PLC
E27

PLC
G24d

ADVANTAGES

Diffuser in opal PC, available with natural light colour temperature. It is recommended, before installation, to remove any electronic and electromagnetic power supply present in the illuminating body. Energy savings of 44%.

Characteristics

RA	25.000	on off	-44%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Great solution for reception, offices, meeting rooms, accommodation facilities residential and residential.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
PLC-102740	E27	10W	18W CFL	800Lm	4000K	230V/AC 50/60 Hz	120°	55mA	> 0,80	35x165x35	125	6/24	€ 16,90
PLC-102440	G24d	10W	18W CFL	800Lm	4000K	230V/AC 50/60 Hz	120°	55mA	> 0,80	35x165x35	125	6/24	€ 16,90

LED LIGHT SOURCES - PROFESSIONAL GXLED



ADVANTAGES

Die cast aluminium heatsink and opal PC diffuser. Energy savings of 62%.

Characteristics

RA	30.000	on off	-62%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

The best solution for living rooms, dining rooms, home environments and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
GXLED-055330	GX53	5W	13W CFL	400Lm	3000K	175-250V/AC 50/60 Hz	100°	41mA	> 0,50	75x29	76	6/24	€ 14,50
GXLED-055340	GX53	5W	13W CFL	420Lm	4000K	175-250V/AC 50/60 Hz	100°	41mA	> 0,50	75x29	76	6/24	€ 14,50



CL

SLAR111
G53

ADVANTAGES

Included external Driver (CL15W), powered by electromagnetic and non-electronic transformers (SLAR111). The brilliant visual effect, faithfully reproduces real colours, highlighting the beauty of the objects. Available in different colour temperatures. Energy savings 85%.

Characteristics

RA	30.000	on off	-85%	IP20	A+	F
CRI>85	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Appropriate solution for living rooms, corridors, notches, shops, bars, hotels, reception and museums.

DRIVER INCLUDED: cod. CL-152430 / CL-152440

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
CL-152430	-	15W	100W ALO	1200Lm	3000K	220-240V/AC 50/60 Hz	24°	63mA	> 0,90	111x54	157	6/24	€ 16,90
CL-152440	-	15W	100W ALO	1200Lm	4000K	220-240V/AC 50/60 Hz	24°	63mA	> 0,90	111x54	157	6/24	€ 16,90
SLAR111-124030	G53	12W	50W ALO	900Lm	3000K	12V AC/DC 50/60 Hz	36°	900mA	> 0,80	111x57	165	10/50	€ 13,90

LED LIGHT SOURCES - PROFESSIONAL SUPERLED

PRO
LINE



SLPAR20
REFLECTOR E27

SLPAR30
REFLECTOR E27

SLPAR38
REFLECTOR E27

ADVANTAGES

It has a heavy aluminium body that makes it suitable for prolonged use. Available in warm light colour temperature. Energy savings of 86%.

Characteristics

RA	30.000	on off	-86%	IP20	A
CRI>83	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Great solution for lobby, restaurants, bars, corridors, stairs and accommodation facilities.

SUITABLE FOR PROLONGED USE

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
SLPAR20-072730	E27	7W	50W ALO	420Lm	3000K	220-240V/AC 50/60 Hz	38°	30mA	> 0,50	63x84	148	6/24	€ 18,90
SLPAR30-112730	E27	11W	75W ALO	765Lm	3000K	220-240V/AC 50/60 Hz	38°	47mA	> 0,94	96x112	215	6/24	€ 23,90
SLPAR38-162730	E27	16W	100W ALO	1038Lm	3000K	220-240V/AC 50/60 Hz	38°	69mA	> 0,94	120x133	454	6/24	€ 32,50

LED LIGHT SOURCES - PROFESSIONAL SERIE LIGHT



LR50
REFLECTOR E14



LR63
REFLECTOR E27



LR80
REFLECTOR E27

ADVANTAGES

Directional LED bulbs that generate a targeted beam of light, available in different light colour temperatures. Energy savings of 88%.

Characteristics

RA	30.000	on off	-88%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Appropriate solution for store windows, display cases, accommodation facilities, residential interiors.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
LR50-051430	E14	5W	40W	470Lm	3000K	220-240V/AC 50/60 Hz	120°	38mA	> 0,50	50x85	29	6/24	€ 4,50
LR50-051440	E14	5W	40W	470Lm	4000K	220-240V/AC 50/60 Hz	120°	38mA	> 0,50	50x85	29	6/24	€ 4,50
LR63-082730	E27	10W	60W	806Lm	3000K	220-240V/AC 50/60 Hz	120°	82mA	> 0,50	63x100	49	6/24	€ 5,90
LR63-082740	E27	10W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	120°	82mA	> 0,50	63x100	49	6/24	€ 5,90
LR80-152730	E27	15W	100W	1220Lm	3000K	220-240V/AC 50/60 Hz	120°	108mA	> 0,50	80x115	77	6/24	€ 8,50
LR80-152740	E27	15W	100W	1220Lm	4000K	220-240V/AC 50/60 Hz	120°	108mA	> 0,50	80x112	77	6/24	€ 8,50

LED LIGHT SOURCES - PROFESSIONAL SERIE LIGHT



PAR20
REFLECTOR E27

PAR30
REFLECTOR E27

PAR38
REFLECTOR E27

SPECIAL LENS FOR LIGHT BEAM HOMOGENEITY

ADVANTAGES

Next-generation PAR bulbs with white light beam, ideal solution for spot lighting. The special lens ensures a light beam without dispersion. Available in warm colour temperature. Energy savings of 85%.

Characteristics

RA	30.000	on off	-85%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Great solution for receptions, restaurants, bars, corridors, stairs and accommodation facilities.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PAR20-082730	E27	8W	60W	640Lm	3000K	220-240V/AC 50/60 Hz	40°	70mA	> 0,50	64x86	55	6/24	€ 6,50
PAR30-102730	E27	10W	75W	820Lm	3000K	220-240V/AC 50/60 Hz	40°	87mA	> 0,50	95x117	125	6/24	€ 10,50
PAR38-152730	E27	15W	100W	1305Lm	3000K	220-240V/AC 50/60 Hz	40°	130mA	> 0,50	120x137	206	6/24	€ 13,90

LED LIGHT SOURCES - PROFESSIONAL

SAPHIRLED

2 YEARS
WARRANTY



SAP
CLEAR E27

SAPS
OPAL E27 - E40

ADVANTAGES

Similar in shape to traditional Saps, the 2200K version provides a great performance for the typical lighting of historic centres. Available in different colour temperatures. Saving 89% energy.

Characteristics

RA	25.000	on off	-89%	IP20	A++
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for historic centres, gardens, driveways and routes.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
SAP-112727	E27	11W	100W	1500Lm	2700K	220-240V/AC 50/60 Hz	360°	86mA	> 0,50	75x157	68	5/20	€ 16,90
SAPS-112722	E27	11W	100W	1300Lm	2200K	220-240V/AC 50/60 Hz	360°	86mA	> 0,50	75x157	63	5/20	€ 16,90
SAPS-112727	E27	11W	100W	1500Lm	2700K	220-240V/AC 50/60 Hz	360°	86mA	> 0,50	75x157	63	5/20	€ 16,90
SAPS-112740	E27	11W	100W	1500Lm	4000K	220-240V/AC 50/60 Hz	360°	86mA	> 0,50	75x157	63	5/20	€ 16,90
SAP-142727	E27	14W	110W	2000Lm	2700K	220-240V/AC 50/60 Hz	360°	103mA	> 0,50	90x198	99	5/20	€ 18,90
SAPS-142722	E27	14W	110W	1700Lm	2200K	220-240V/AC 50/60 Hz	360°	103mA	> 0,50	90x198	99	5/20	€ 18,90
SAPS-142727	E27	14W	110W	2000Lm	2700K	220-240V/AC 50/60 Hz	360°	103mA	> 0,50	90x198	99	5/20	€ 18,90
SAPS-142740	E27	14W	110W	2000Lm	4000K	220-240V/AC 50/60 Hz	360°	103mA	> 0,50	90x198	99	5/20	€ 18,90
SAPS-144022	E40	14W	110W	1700Lm	2200K	220-240V/AC 50/60 Hz	360°	103mA	> 0,50	90x208	104	5/20	€ 19,90

LED LIGHT SOURCES - PROFESSIONAL

LOTUS 70



Now also
available in
WARM LIGHT
1800K

LTS
E27 - E40

ADVANTAGES

High-power lamp similar to traditional SAP, able to guarantee a soft and uniform light. The 2200K version is ideal for the typical lighting of historic centres. Excellent dissipation and suitability for prolonged use. Available in different colour temperatures.


Characteristics

RA	20.000	on off	-83%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

A valid solution for historic centres, industrial buildings, warehouses, workshops, factories, parking lots, installation in industrial bells.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW LTS-302718	E27	30W	180W	2800Lm	1800K	220-240V/AC 50/60 Hz	330°	150mA	> 0,90	96x228	274	1/20	€ 25,90
NEW LTS-302730	E27	30W	180W	2800Lm	3000K	220-240V/AC 50/60 Hz	330°	150mA	> 0,90	96x228	274	1/20	€ 25,90
NEW LTS-302740	E27	30W	180W	2800Lm	4000K	220-240V/AC 50/60 Hz	330°	150mA	> 0,90	96x228	274	1/20	€ 25,90
NEW LTS-502718	E27	50W	300W-70W SAP	4250Lm	1800K	200-240V/AC 50/60 Hz	330°	240mA	> 0,90	108x264	370	1/20	€ 39,90
LTS-502722	E27	50W	300W-70W SAP	4750Lm	2200K	200-240V/AC 50/60 Hz	330°	240mA	> 0,90	108x264	355	1/20	€ 39,90
LTS-502730	E27	50W	300W-70W SAP	4750Lm	3000K	220-240V/AC 50/60 Hz	330°	240mA	> 0,90	108x264	370	1/20	€ 39,90
LTS-502740	E27	50W	300W-70W SAP	4750Lm	4000K	200-240V/AC 50/60 Hz	330°	240mA	> 0,90	108x264	355	1/20	€ 39,90
LTS-504022	E40	50W	300W-70W SAP	4750Lm	2200K	200-240V 50/60 Hz	330°	240mA	> 0,90	108x274	405	1/20	€ 39,90
LTS-504030	E40	50W	300W-70W SAP	4750Lm	3000K	200-240V/AC 50/60 Hz	330°	240mA	> 0,90	108x274	405	1/20	€ 39,90
LTS-504040	E40	50W	300W-70W SAP	4750Lm	4000K	200-240V/AC 50/60 Hz	330°	240mA	> 0,90	108x274	405	1/20	€ 39,90

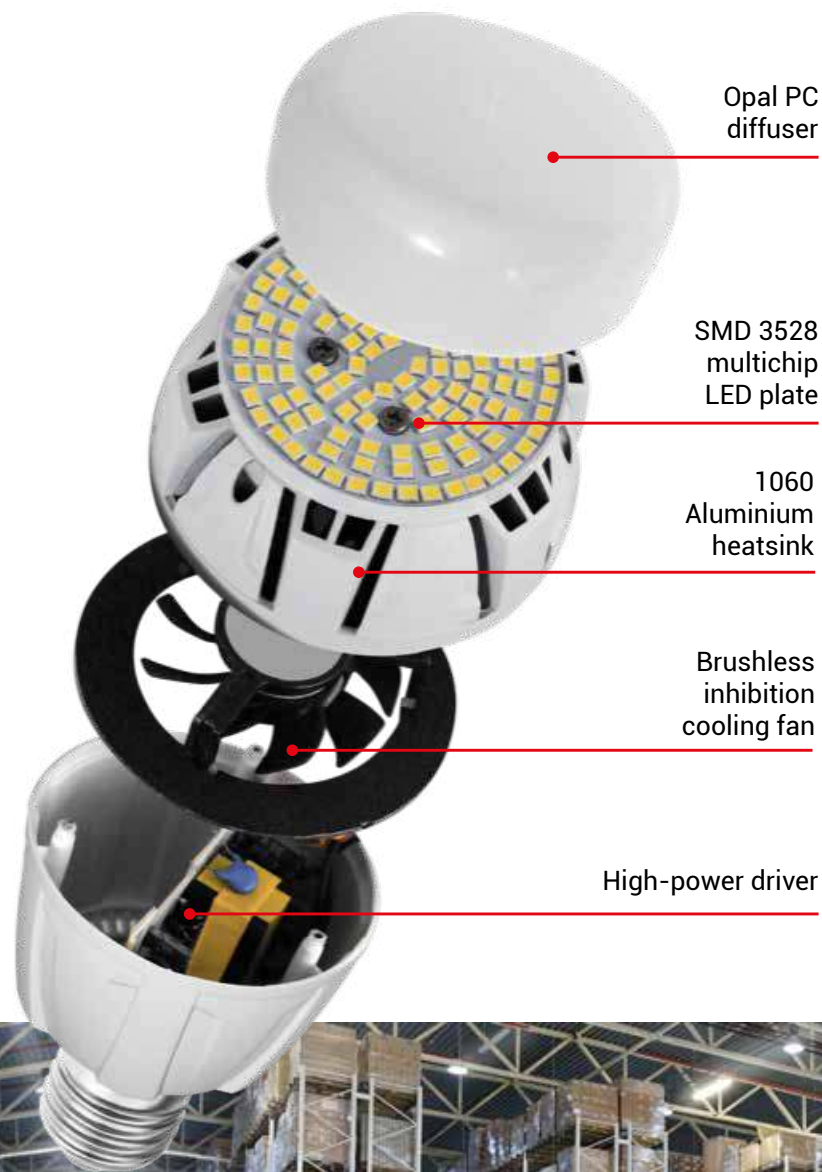

Key Features

- High-power LED technology
- Induction cooling fan
- Suitable for prolonged use

Applications

Recommended for professional uses: warehouses, stores, supermarkets, industrial and commercial buildings



LED LIGHT SOURCES - PROFESSIONAL MAXIMA

PRO
LINE



MX
E27-E40

ADVANTAGES

Die cast aluminium body painted with epoxy powders, equipped with cooling fan is available in different light colour temperatures. Suitable for open industrial suspension but not suitable for highly dusty environments. 100 Lumen per Watt, energy savings of 87%.

Characteristics

RA	30.000	on off	-87%	IP20	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for warehouses, stores, industrial and commercial buildings.

Product code	Con- nection	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
MX-402740	E27	40W	300W-80W SAP	4000Lm	4000K	175-250V/AC 50/60 Hz	270°	193mA	≥0,90	78x155	280	5/20	€ 59,00
MX-704040	E40	70W	500W-150W SAP	7000Lm	4000K	175-250V/AC 50/60 Hz	200°	338mA	≥0,90	88x181	416	5/10	€ 83,00
MX-704065	E40	70W	500W-150W SAP	7000Lm	6500K	175-250V/AC 50/60 Hz	200°	338mA	≥0,90	88x181	416	5/10	€ 83,00
MX-1004040	E40	100W	750W-250W SAP	10000Lm	4000K	175-250V/AC 50/60 Hz	200°	483mA	≥0,90	98x198	532	5/10	€ 105,00
MX-1004065	E40	100W	750W-250W SAP	10000Lm	6500K	175-250V/AC 50/60 Hz	200°	483mA	≥0,90	98x198	532	5/10	€ 105,00
MX-1504040	E40	150W	1000W-400W SAP	15000Lm	4000K	175-250V/AC 50/60 Hz	270°	725mA	≥0,90	114x230	788	5/10	€ 160,00
MX-1504065	E40	150W	1000W-400W SAP	15000Lm	6500K	175-250V/AC 50/60 Hz	270°	725mA	≥0,90	114x230	788	5/10	€ 160,00

LED LIGHT SOURCES - PROFESSIONAL MAXIMA ROUND

PRO
LINE



MXR
E27-E40

ADVANTAGES

Body in ABS with internal aluminium fin cooler, available in two colour temperatures. Suitable for open industrial suspensions and also for highly dusty environments. It ensures excellent dissipation and suitable for prolonged use. Energy savings of 83%.

Characteristics

RA	30.000	on off	-83%	IP20	A
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Ideal for warehouses, stores, industrial and commercial buildings.

Product code	Con- nection	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
MXR-502740	E27	50W	300W-80W SAP	4000Lm	4000K	170-240V/AC 50/60 Hz	180°	220mA	≥0,90	145x215	470	1/10	€ 36,00
MXR-502765	E27	50W	300W-80W SAP	4100Lm	6500K	170-240V/AC 50/60 Hz	180°	220mA	≥0,90	145x215	470	1/10	€ 36,00
MXR-504040	E40	50W	300W-80W SAP	4000Lm	4000K	170-240V/AC 50/60 Hz	180°	220mA	≥0,90	145x215	485	1/10	€ 36,00
MXR-504065	E40	50W	300W-80W SAP	4100Lm	6500K	170-240V/AC 50/60 Hz	180°	220mA	≥0,90	145x215	485	1/10	€ 36,00
MXR-1004040	E40	100W	500W-150W SAP	8000Lm	4000K	170-240V/AC 50/60 Hz	180°	440mA	≥0,90	190x268	855	5/10	€ 65,00
MXR-1004065	E40	100W	500W-150W SAP	8100Lm	6500K	170-240V/AC 50/60 Hz	180°	440mA	≥0,90	190x268	855	5/10	€ 65,00



MAXIMUM POWER
FOR REAL PROFESSIONALS



NEW

LED LIGHT SOURCES - PROFESSIONAL

PLOSE 360

2 YEARS
WARRANTY



Ideal for enclosed
appliances

ADVANTAGES

Applicable in devices with IP65 protection, 360-degree light angle on a horizontal plane and high colour rendering.

Characteristics

RA	30.000	on off	-90%	IP20	A++	IK08
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class	Impact protection


APPLICATIONS

Ideal for outdoor environments in IP65 devices.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW PSE-302730	E27	30W	300W-80 SAP	4500Lm	3000K	100-240V/AC 50/60 Hz	280°	136mA	> 0,90	73x175	430	5/20	€ 43,00
NEW PSE-302740	E27	30W	300W-80 SAP	4500Lm	4000K	100-240V/AC 50/60 Hz	280°	136mA	> 0,90	73x175	430	5/20	€ 43,00
NEW PSE-302765	E27	30W	300W-80 SAP	4500Lm	6500K	100-240V/AC 50/60 Hz	280°	136mA	> 0,90	73x175	430	5/20	€ 43,00
NEW PSE-402730	E27	40W	500W-150 SAP	6300Lm	3000K	100-240V/AC 50/60 Hz	280°	181mA	> 0,90	73x180	450	5/20	€ 59,00
NEW PSE-402740	E27	40W	500W-150 SAP	6300Lm	4000K	100-240V/AC 50/60 Hz	280°	181mA	> 0,90	73x180	450	5/20	€ 59,00
NEW PSE-402765	E27	40W	500W-150 SAP	6300Lm	6500K	100-240V/AC 50/60 Hz	280°	181mA	> 0,90	73x180	450	5/20	€ 59,00



BEAM ANGLE OF 360° HORIZONTALLY
AND 280° VERTICALLY



Possible installations

NEW

LED LIGHT SOURCES - PROFESSIONAL PAR56

2 YEARS
WARRANTY



**LED lamp for pools
made of anti-aging
tempered glass**

ADVANTAGES

Easy installation. Made of glass, it has an IP68 protection index that makes it perfectly resistant to immersion, with a lifespan of over 30,000 hours inside the pool. Design solution that provides high-quality lighting with 2700Lm.

Characteristics

RA	30.000	on off	-90%	III	IP68	A+
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for gardens, swimming pools and outdoor spaces.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW PAR56-301640	-	30W	300W	2700Lm	4000K	12V AC/DC 50/60 Hz	90°	2777mA	> 0,80	176x110	940	1/12	€ 145,00
NEW PAR56-301660	-	30W	300W	2700Lm	6000K	12V AC/DC 50/60 Hz	90°	2777mA	> 0,80	176x110	940	1/12	€ 145,00



LED LIGHT SOURCES **TUBES**

FULL VISION

The best alternative to traditional fluorescent tubes. A creation that takes advantage of LED technology with $PF \geq 90$, which allows an energy saving of more than 50%. The LED tubes have an incredible amplitude and homogeneity of their light beam.

LED LIGHT SOURCES - TUBES

FULL VISION

PRO
LINE



ADVANTAGES

Suitable for ceiling lights and available in different colour temperatures. It stands out as an alternative to the widespread fluorescent tubes, with its all-glass opal structure for a homogeneous light beam. Energy savings of 50%.

Characteristics

RA	25.000	on off	-50%	IP20	A+
CRI>82	Lifetime (hours)	≥15.000 Switches	Savings	Degree of protection	Energetic class

APPLICATIONS

Great solution for indoor and outdoor parking, warehouses, distribution areas, supermarkets, shopping malls and gyms.

Product code	Length mm	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
FVT8-096040	680m	9W	18W	900Lm	4000K	220-240V/AC 50/60 Hz	270°	45mA	> 0,90	25x600	109	1/25	€ 5,50
FVT8-096065	680m	9W	18W	900Lm	6500K	220-240V/AC 50/60 Hz	270°	45mA	> 0,90	25x600	109	1/25	€ 5,50
FVT8-149040	975m	14W	30W	1400Lm	4000K	220-240V/AC 50/60 Hz	270°	70mA	> 0,90	25x900	158	1/25	€ 9,50
FVT8-149065	985m	14W	30W	1400Lm	6500K	220-240V/AC 50/60 Hz	270°	70mA	> 0,90	25x900	158	1/25	€ 9,50
FVT8-181230	1280m	18W	36W	1930Lm	3000K	220-240V/AC 50/60 Hz	270°	85mA	> 0,90	25x1200	211	1/25	€ 8,50
FVT8-181240	1280m	18W	36W	1930Lm	4000K	220-240V/AC 50/60 Hz	270°	85mA	> 0,90	25x1200	211	1/25	€ 8,50
FVT8-181265	1280m	18W	36W	1930Lm	6500K	220-240V/AC 50/60 Hz	270°	85mA	> 0,90	25x1200	211	1/25	€ 8,50
FVT8-221530	1585m	22W	58W	2300Lm	3000K	220-240V/AC 50/60 Hz	270°	109mA	> 0,90	25x1500	259	1/25	€ 9,50
FVT8-221540	1585m	22W	58W	2300Lm	4000K	220-240V/AC 50/60 Hz	270°	109mA	> 0,90	25x1500	259	1/25	€ 9,50
FVT8-221565	1585m	22W	58W	2300Lm	6500K	220-240V/AC 50/60 Hz	270°	109mA	> 0,90	25x1500	259	1/25	€ 9,50




LED LINEAR SYSTEMS

The simplicity of the shapes and the high quality create solutions that can be applied both indoors and outdoors, all characterized by high durability and significant energy savings.



LED STRIPS · ALUMINIUM PROFILES · CEILINGS · WATERTIGHT LUMINAIRES

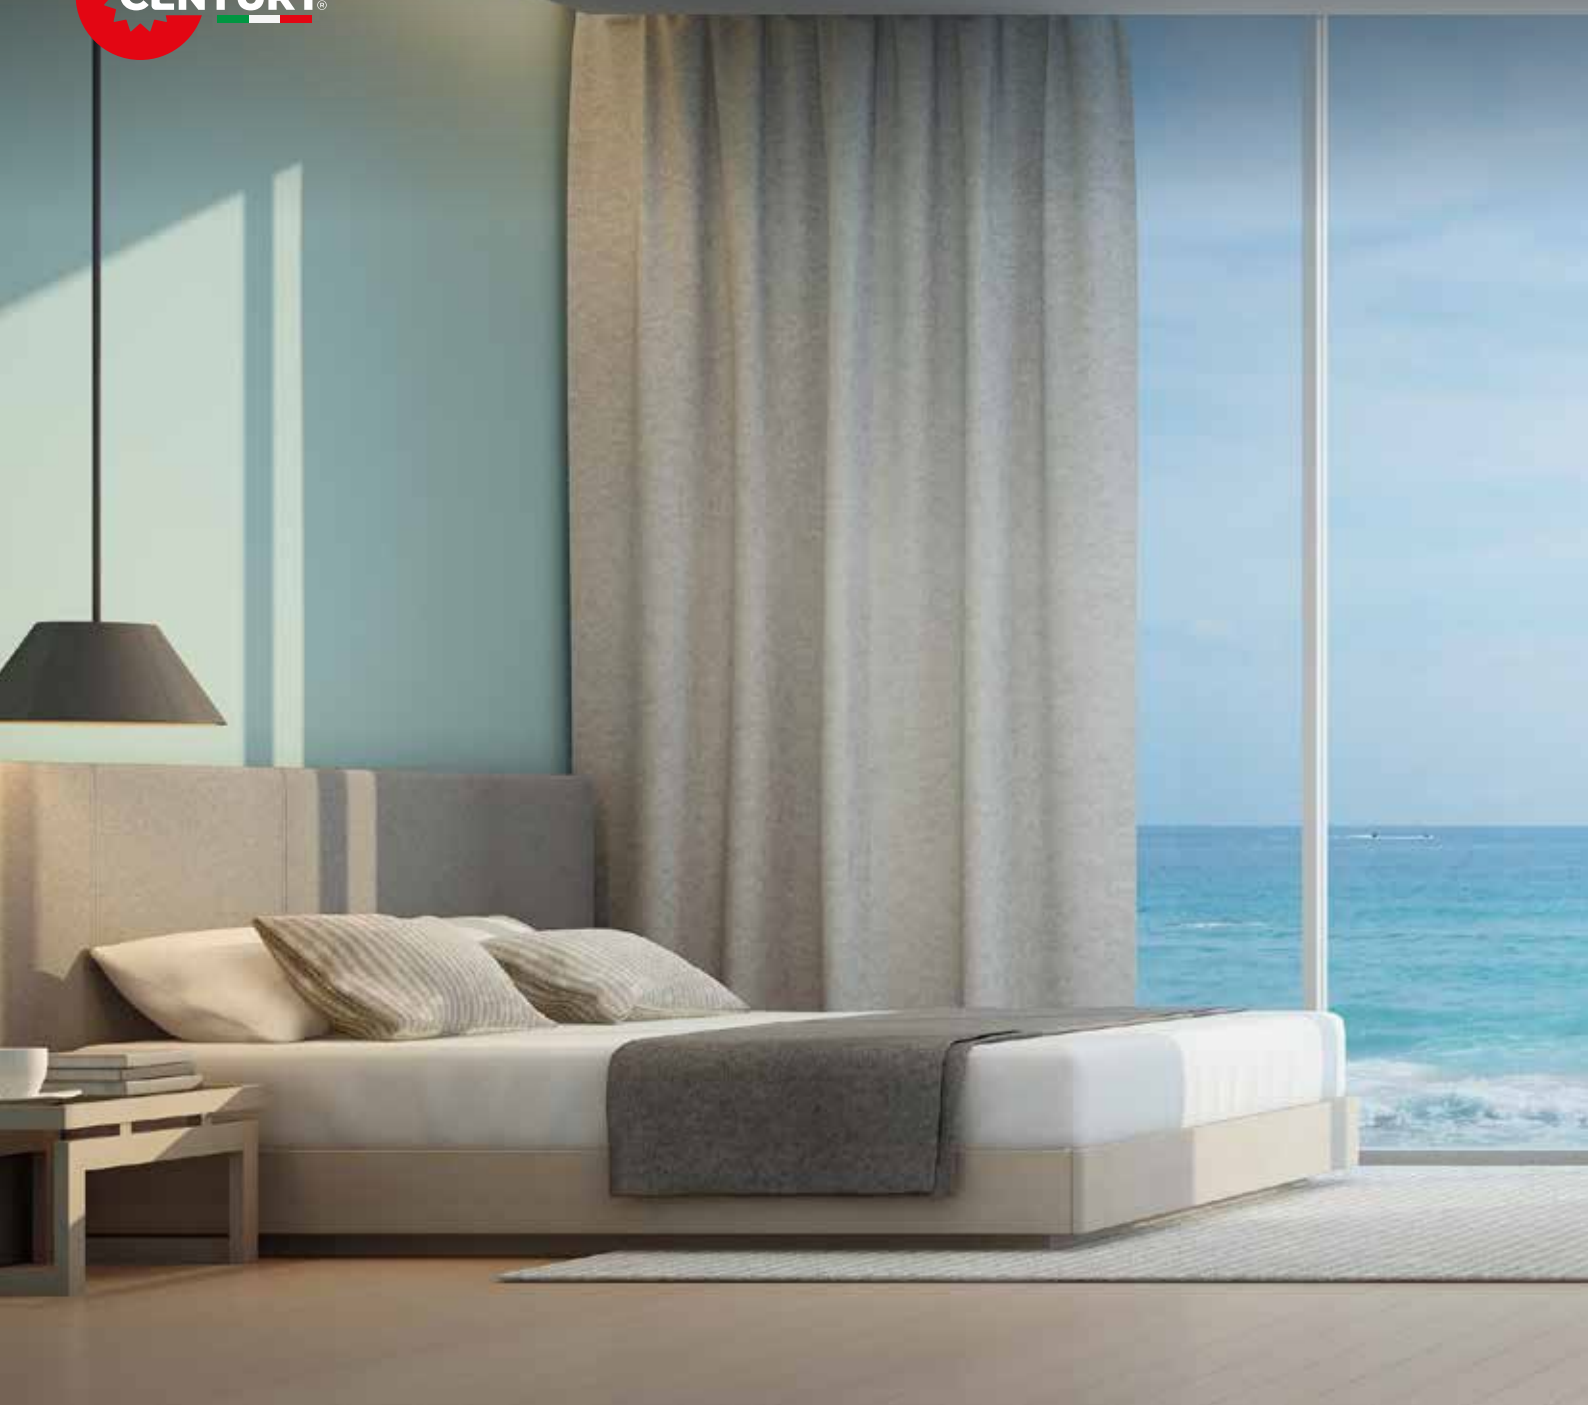

The emotion of light runs on a thin line, the one that gives a unique optical effect. Infinite solutions for multiple spaces. LED strips now have greater power and quality, thanks to which the lighting possibilities know no limits.



LED LINEAR SYSTEMS

LED STRIPS

ACCÈNTO · ACCÈNTO PRO · DRIVER ·
KIT Multicolor · RGBW Controller · CONNECTORS

LED LINEAR SYSTEMS - LED STRIPS

ACCÈNTO



**AC2
STRIP**

**ACRGBW
STRIP**

RGBW
4000K



ADVANTAGES

Flexible light source, easy to model. It is advisable not to exceed 10m of light from one power source.

Characteristics

RA	40.000	on off	IP20	A+	F
CRI>80	Lifetime (hours)	≥20.000 Switches	Degree of protection	Energetic class	Ok flammable surfaces


APPLICATIONS

Great solution for generic lighting on furniture, under kitchen cabinets, in mouldings and for illuminating architectural details.

Product code	Meters	Watt	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
AC2-482430	5m	24W 4.8W/m x 5m	420Lm/m	3000K	24V/DC	120°	200mA	5000x10x2.9	305	10/20	€ 16,90
AC2-482460	5m	24W 4.8W/m x 5m	420Lm/m	6000K	24V/DC	120°	200mA	5000x10x2.9	305	10/20	€ 16,90
AC2-722430	5m	36W 7.2W/m x 5m	420Lm/m	3000K	24V/DC	120°	300mA	5000x10x2.9	305	10/20	€ 18,90
AC2-722440	5m	36W 7.2W/m x 5m	480Lm/m	4000K	24V/DC	120°	300mA	5000x10x2.9	305	10/20	€ 18,90
AC2-722460	5m	36W 7.2W/m x 5m	480Lm/m	6000K	24V/DC	120°	300mA	5000x10x2.9	305	10/20	€ 18,90
AC2-142430	5m	72W 14.4W/m x 5m	840Lm/m	3000K	24V/DC	120°	600mA	5000x10x2.9	305	10/20	€ 25,90
AC2-142440	5m	72W 14.4W/m x 5m	840Lm/m	4000K	24V/DC	120°	600mA	5000x10x2.9	305	10/20	€ 25,90
AC2-142460	5m	72W 14.4W/m x 5m	960Lm/m	6000K	24V/DC	120°	600mA	5000x10x2.9	305	10/20	€ 25,90
NEW ACRGBW-196010	5m	95W 19W/m x 5m	5000Lm	4000K-RGB	24V/DC	120°	800mA	5000x180x12	147	10/20	€ 85,00

Accessory

Product code	Description	Price
KIT-ACRGBW	Controller RGBW	€ 35,00
CTLSMA-ACRGBW	Controller WIFI RGBW	€ 33,00

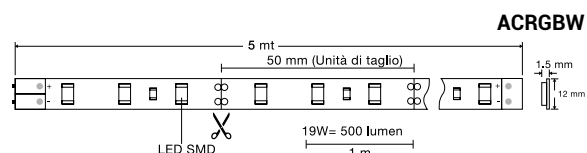

AC2BL
STRIPACBL
STRIPACRBL
STRIP

ready
to go!

ADVANTAGES

Flexible light source, easy to model. Ready-to-use kit including power supply and remote control.

Characteristics

RA	40.000	IP20	A+	F
CRI>80	Lifetime (hours)	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for generic lighting on furniture, under kitchen cabinets, in mouldings and for illuminating architectural details.

Product code	Meters	Watt	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
AC2BL-182430	1m	1,8W 1.8W/m x 1m	120Lm/m	3000K	230V/AC	120°	40mA	1000x8x2.9	115	10/20	€ 16,90
AC2BL-182460	1m	1,8W 1.8W/m x 1m	120Lm/m	6000K	230V/AC	120°	40mA	1000x8x2.9	115	10/20	€ 16,90
ACBL-486030	3m	14,4W 4.8W/m x 3m	1080Lm/m	3000K	230V/AC	120°	400mA	3000x8x2.9	340	10/20	€ 29,90
ACBL-486060	3m	14,4W 4.8W/m x 3m	1260Lm/m	6000K	230V/AC	120°	400mA	3000x8x2.9	340	10/20	€ 29,90
ACRBL-486010	3m	14,4W 4.8W/m x 3m	-	RGB	230V/AC	120°	100mA	3000x8x2.9	102	10/20	€ 39,90

LED LINEAR SYSTEMS - LED STRIPS

ACCENTO PRO



AC90 PROFESSIONAL LED STRIP

LEDs per METER

7,2 W..... 30 Led/m
14,4 W..... 60 Led/m
20 W.....120 Led/m
24 W.....240 Led/m

ADVANTAGES

CRI 90 guarantees a perfect natural rendering of colours. The double layer of copper and the extra strong adhesive ensure better heat dissipation. It is recommended not to exceed 10m of light from one power source.

Characteristics

RA	50.000	IP20	A	F
CRI>90	Lifetime (hours)	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for generic lighting on furniture, under kitchen cabinets, in mouldings and to illuminate architectural details.

CONNECTORS AND OTHER ACCESSORIES ARE AVAILABLE at page 134

Product code	Meters	Watt	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
AC90-723030	5m	36W 7.2W/m x 5m	468Lm/m	3000K	24V/DC -	120°	250mA	5000x8x1.5	88	10/20	€ 29,00
AC90-723040	5m	36W 7.2W/m x 5m	468Lm/m	4000K	24V/DC -	120°	250mA	5000x8x1.5	88	10/20	€ 29,00
AC90-723060	5m	36W 7.2W/m x 5m	468Lm/m	6000K	24V/DC -	120°	250mA	5000x8x1.5	88	10/20	€ 29,00
AC90-146030	5m	72W 14.4W/m x 5m	990Lm/m	3000K	24V/DC -	120°	442mA	5000x8x1.5	92	10/20	€ 43,00
AC90-146040	5m	72W 14.4W/m x 5m	990Lm/m	4000K	24V/DC -	120°	442mA	5000x8x1.5	92	10/20	€ 43,00
AC90-146060	5m	72W 14.4W/m x 5m	990Lm/m	6000K	24V/DC -	120°	442mA	5000x8x1.5	92	10/20	€ 43,00
AC90-2012030	5m	100W 20W/m x 5m	1520Lm/m	3000K	24V/DC -	120°	820mA	5000x10x1.5	115	10/20	€ 66,00
AC90-2012040	5m	100W 20W/m x 5m	1520Lm/m	4000K	24V/DC -	120°	820mA	5000x10x1.5	115	10/20	€ 66,00
AC90-2012060	5m	100W 20W/m x 5m	1520Lm/m	6000K	24V/DC -	120°	820mA	5000x10x1.5	115	10/20	€ 66,00
AC90-2424030	5m	120W 24W/m x 5m	1800Lm/m	3000K	24V/DC -	120°	1000mA	5000x10x1.5	131	10/20	€ 122,00
AC90-2424040	5m	100W 24W/m x 5m	1800Lm/m	4000K	24V/DC -	120°	1000mA	5000x10x1.5	131	10/20	€ 122,00
AC90-2424060	5m	120W 24W/m x 5m	1800Lm/m	6000K	24V/DC -	120°	1000mA	5000x10x1.5	131	10/20	€ 122,00

LED LINEAR SYSTEMS - LED STRIPS

ACCÈNTO PRO

DOUBLE ROW



LEDs per METER

30 W.....240 Led/m

AC90 PROFESSIONAL LED STRIP

ADVANTAGES

CRI 90 for a perfect natural rendering of colours. The double layer of copper and the extra strong adhesive ensure better heat dissipation. It is recommended not to exceed 10m of light from one power source.

Characteristics

RA	50.000	IP20	A	F
CRI>90	Lifetime (hours)	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for generic lighting on furniture, under kitchen cabinets, in mouldings and to illuminate architectural details.

CONNECTORS AND OTHER ACCESSORIES ARE AVAILABLE

DOUBLE ROW OF LED CHIPS

Product code	Meters	Watt	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
AC90-3024030	5m	150W 30W/m x 5m	2280Lm/m	3000K	24V/DC -	120°	1217mA	5000x15x1.5	178	10/20	€ 130,00
AC90-3024040	5m	150W 30W/m x 5m	2280Lm/m	4000K	24V/DC -	120°	1217mA	5000x15x1.5	178	10/20	€ 130,00
AC90-3024060	5m	150W 30W/m x 5m	2280Lm/m	6000K	24V/DC -	120°	1217mA	5000x15x1.5	178	10/20	€ 130,00

LED LINEAR SYSTEMS - LED STRIPS

ACCENTO PRO

CONTINUOUS LINE



LEDs per METER

20 W.....300 Led/m

24 W.....420 Led/m

AC90 PROFESSIONAL LED STRIP

ADVANTAGES

CRI 90 for a perfect natural rendering of colours. The double layer of copper and the extra strong adhesive ensure better heat dissipation. High number of chips to achieve a homogeneous light effect. It is recommended not to exceed 10m of light from one power source.

Characteristics

RA	50.000	IP20	A	F
CRI>90	Lifetime (hours)	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for generic lighting on furniture, under kitchen cabinets, in mouldings and to illuminate architectural details.

CONNECTORS AND OTHER ACCESSORIES ARE AVAILABLE

CONTINUOUS LINE EFFECT

Product code	Meters	Watt	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
AC90-2030030	5m	100W 20W/m x 5m	1260Lm/m	3000K	24V/DC -	120°	833mA	5000x10x1	123	10/20	€ 160,00
AC90-2030040	5m	100W 20W/m x 5m	1260Lm/m	4000K	24V/DC -	120°	833mA	5000x10x1	123	10/20	€ 160,00
AC90-2030060	5m	100W 20W/m x 5m	1260Lm/m	6000K	24V/DC -	120°	833mA	5000x10x1	123	10/20	€ 160,00
AC90-2442030	5m	120W 24W/m x 5m	1608Lm/m	3000K	24V/DC -	120°	1000mA	5000x10x1	130	10/20	€ 210,00
AC90-2442040	5m	120W 24W/m x 5m	1608Lm/m	4000K	24V/DC -	120°	1000mA	5000x10x1	130	10/20	€ 210,00
AC90-2442060	5m	120W 24W/m x 5m	1608Lm/m	6000K	24V/DC -	120°	1000mA	5000x10x1	130	10/20	€ 210,00

LED LINEAR SYSTEMS - LED STRIPS

ACCÈNTO PRO

IP67



LEDs per METER

14,4 W.....60 Led/m

**AC9067
STRIP**

ADVANTAGES

LED STRIP IP67, perfect for outdoor applications. CRI 90 for a perfect natural rendering of colours. The double layer of copper ensures better heat dissipation. It is recommended not to exceed 10m of light from one power source. It has no sticker.

Characteristics


RA	50.000	IP67	A	F
CRI>90	Lifetime (hours)	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for general outdoor lighting.

CONNECTORS AND OTHER ACCESSORIES ARE AVAILABLE

Product code	Meters	Watt	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
AC9067-146030	5m	72W 14.4W/m x 5m	990Lm/m	3000K	24V/DC -	120°	442mA	5000x10x4.5	175	10/20	€ 55,00
AC9067-146040	5m	72W 14.4W/m x 5m	990Lm/m	4000K	24V/DC -	120°	442mA	5000x10x4.5	175	10/20	€ 55,00
AC9067-146060	5m	72W 14.4W/m x 5m	990Lm/m	6000K	24V/DC -	120°	442mA	5000x10x4.5	175	10/20	€ 55,00

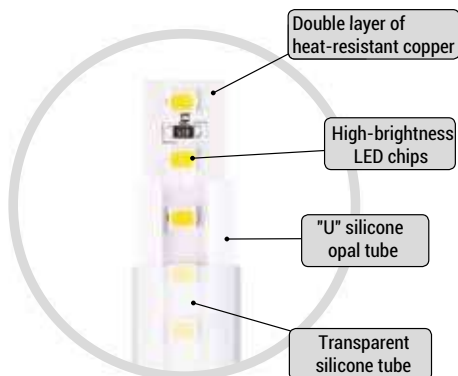

It's the detail that makes the difference. These essential complements enable LED sources to make the most of their potential, giving a high-performance, efficient and intelligent light to the surroundings.

DRIVER RDAC100



- Constant low voltage driver AC100-240VAC 50/60Hz
- Metal shell with protected screw clamber



Insulation class

Product code	Description	Dimmable	Degree of protection	Volt/ Hertz	Costant tension output	Length mm	Width mm	Height mm	Weight gr	Price
RDAC35-24	35W	NO	IP20	220-240V/AC 50/60 Hz	24 V/DC - 1500mA	88	39	58	131	€ 14,50
RDAC60-24	60W	NO	IP20	220-240V/AC 50/60 Hz	24 V/DC - 2500mA	110	32	77	198	€ 21,50
RDAC100-24	100W	NO	IP20	220-240V/AC 50/60 Hz	24 V/DC - 4200mA	160	43	99	348	€ 26,00
RDAC120-24	120W	NO	IP20	220-240V/AC 50/60 Hz	24 V/DC - 5000mA	160	43	99	430	€ 29,00
RDAC150-24	150W	NO	IP20	220-240V/AC 50/60 Hz	24 V/DC - 6500mA	200	43	99	471	€ 29,00
RDAC200-24	200W	NO	IP20	220-240V/AC 50/60 Hz	24 V/DC - 8300mA	200	43	99	540	€ 37,00
NEW RDAC50-2467	50W	NO	IP67	170-250V/AC 50/60 Hz	24 V/DC - 2100mA	205	35	24	-	€ 30,90
NEW RDAC100-2467	100W	NO	IP67	170-250V/AC 50/60 Hz	24 V/DC - 4200mA	182	62	17	-	€ 54,90
NEW RDAC200-2467	200W	NO	IP67	170-250V/AC 50/60 Hz	24 V/DC - 8300mA	238	58	32	-	€ 84,90
NEW RDAC300-2467	300W	NO	IP67	170-250V/AC 50/60 Hz	24 V/DC - 12500mA	228	72	32	-	€ 114,90
NEW RDAC60-2467D	60W	YES	IP67	175-264V/AC 50/60 Hz	24 V/DC - 2500mA	205	35	24	-	€ 66,90
NEW RDAC100-2467D	100W	YES	IP67	175-264V/AC 50/60 Hz	24 V/DC - 4200mA	182	58	32	-	€ 109,90
NEW RDAC150-2467D	150W	YES	IP67	175-264V/AC 50/60 Hz	24 V/DC - 6250mA	198	58	32	-	€ 119,90
NEW RDAC250-2467D	250W	YES	IP67	175-264V/AC 50/60 Hz	24 V/DC - 10500mA	228	72	32	-	€ 154,90

RGBW CONTROLLER



REMOTE CONTROL

- Touch RF 2.4GHz remote control
- Size 110 x 52 x 20 mm

CONTROLLER

- Size 85 x 45 x 23 mm
- Voltage: 12-24DC
- Maximum load: 6 A x 4 ch = 24 A

Product code	Packing pcs	Price
--------------	-------------	-------

NEW KIT-ACRGBW - € 35,00



WI-FI RGBW CONTROLLER



KIT ACCESSORY

- RGB LED controller WI-FI
- Connector

Page 33



Product code	Packing pcs	Price
--------------	-------------	-------

NEW CTLSMA-ACRGBW - € 33,00



NEW**LED STRIPS - ACCESSORIES****Junction connectors for LED strips - 8 mm and 10 mm****CONNECTORS - Plastic Bag 2 pcs.**

Product code	Packing pcs	Dimensions	Price 2 pcs
--------------	-------------	------------	-------------

NEW	ACCN8	100	8 mm	€ 0,50
NEW	ACCN10	100	10 mm	€ 0,50

ANGULAR CONNECTORS - Plastic Bag 2 pcs.

Product code	Packing pcs	Dimensions	Price 2 pcs
--------------	-------------	------------	-------------

NEW	ACCN8ANG	100	8 mm	€ 1,40
NEW	ACCN10ANG	100	10 mm	€ 1,40

T-SHAPE CONNECTORS - Plastic Bag 2 pcs.

Product code	Packing pcs	Dimensions	Price 2 pcs
--------------	-------------	------------	-------------

NEW	ACCN8T	100	8 mm	€ 1,90
NEW	ACCN10T	100	10 mm	€ 1,90

CONNECTORS 15 cm CABLE - Plastic Bag 2 pcs.

Product code	Packing pcs	Dimensions	Price 2 pcs
--------------	-------------	------------	-------------

NEW	ACCN8WIRE	100	8 mm	€ 0,70
NEW	ACCN10WIRE	100	10 mm	€ 0,70

CONNECTORS 15 cm CABLE - Plastic Bag 2 pcs.

Product code	Packing pcs	Dimensions	Price 2 pcs
--------------	-------------	------------	-------------

NEW	ACCN8WIRE2	100	8 mm	€ 1,20
NEW	ACCN10WIRE2	100	10 mm	€ 1,20

X-SHAPED CONNECTORS - Plastic Bag 2 pcs.

Product code	Packing pcs	Dimensions	Price 2 pcs
--------------	-------------	------------	-------------

NEW	ACCN8X	100	8 mm	€ 2,40
NEW	ACCN10X	100	10 mm	€ 2,40



Created to ensure that every space can appear in all its elegance. A wide range of versions, with different features. Ready to illuminate with style each environment giving it a touch of modern and attractive design.



LED LINEAR SYSTEMS

ALUMINIUM PROFILES

SURFACE PROFILE · RECESSED · CORNER · 40° · SUSPENSION ·
UPLIGHT · FLOOR · STAIRS · PERIMETER · PLASTER

LED LINEAR SYSTEMS - ALUMINIUM PROFILES

SURFACE PROFILE



KPRS-1708
KIT PROFILE

ADVANTAGES

Two meters long aluminium profiles for LED strips. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Suitable for shops, offices, storefronts, ceilings, corridors, private housing environments.

Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRS-1708	KIT PROFILE	2m	17.4	12.3	8	20	€ 14,00
PRCV-1708	Transparent Cover	2m	-	-	-	20	€ 4,00
PRCO-1708	Opal cover	2m	-	-	-	20	€ 5,50

Technical Design



What is included

No.3 caps (one with a cable hole) and metal clips for fastening.



Accessory

PRCV-1708
Transparent Cover



SURFACE PROFILE

Ultra-flat version



KPRSL-5709
KIT PROFILE

ADVANTAGES

Two meters long aluminium profiles for LED strips. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Suitable for shops, offices, storefronts, ceilings, corridors, private housing environments.


Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRSL-5709	KIT PROFILE	2m	56.7	12.4	8.47	10	€ 30,00

Technical Design



What is included

No.3 caps (one with a cable hole) and metal clips for fastening.

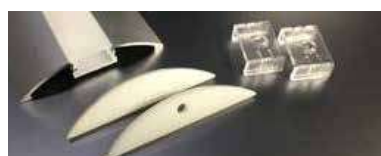

SURFACE PROFILE

Rounded version



KPRS-1611
KIT PROFILE

ADVANTAGES

Two meters long aluminium profiles for LED strips. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Suitable for shops, offices, storefronts, ceilings, corridors, private housing environments.

Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRS-1611	KIT PROFILE	2m	16	12.7	11.08	20	€ 8,50
PRCO-1611	Opal cover	2m	-	-	-	20	€ 4,50

Technical Design



What is included

No.3 caps (one with a cable hole) and metal clips for fastening.



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

RECESSED PROFILE



KPRI-2508
KIT PROFILE



KPRI-3011
KIT PROFILE

ADVANTAGES

Two meters long recessed aluminium profiles for LED strips. Accessories included. Opal cover for a homogenous and refined effect. Hidden installation, flush with the surface.

Characteristics



Degree of protection

READY-TO-USE KIT




APPLICATIONS


Suitable for shops, offices, storefronts, ceilings, corridors, private housing environments.

Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRI-2508	KIT PROFILE	2m	17.4	12.3	7.7	20	€ 15,50
KPRI-3011	KIT PROFILE	2m	23	20	11.15	20	€ 22,00
PRCO-2508	Opal cover	2m	-	-	-	20	€ 4,50
PRCV-2508	Transparent Cover	2m	-	-	-	20	€ 3,50
PRCV-3011	Transparent Cover	2m	-	-	-	20	€ 6,00

Technical Design KPRI-2508



KPRI-3011



What is included

No.3 caps (one with a cable hole) and metal clips for fastening.



Accessory

PRCV-2508
Transparent Cover



PRCV-3011
Transparent Cover



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

RECESSED PROFILE



KPRI-2212
KIT PROFILE



KPRIC-4736
KIT PROFILE
With junction plate

ADVANTAGES

Two meters long recessed aluminium profiles for LED strips. Accessories included. Opal cover for a homogenous and refined effect. Hidden installation, flush with the surface.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT

**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**


APPLICATIONS

Suitable for shops, offices, storefronts, ceilings, corridors, private housing environments.


Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRI-2212	KIT PROFILE	2m	16	11.29	12	20	€ 17,00
KPRIC-4736	KIT PROFILE	2m	33.58	28.79	35.98	100	€ 96,00
PRCV-2212	Transparent Cover	2m	-	-	-	20	€ 3,50

Technical Design

KPRI-2212



KPRIC-4736



What is included



No.3 caps (one with a cable hole) and metal clips for fastening.

KPRIC-4736 is equipped with junction plate.

Accessory cod. KPRI-2212

PRCV-2212
Transparent Cover



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

CORNER PROFILE



KPRAN-1818
KIT PROFILE

ADVANTAGES

Two meters long angular aluminium profile for LED strips. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Suitable for shops, offices, storefronts, ceilings, corridors, private housing environments.

Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRAN-1818	KIT PROFILE	2m	18.5	12.30	19	20	€ 18,00
PRCV-1818	Transparent Cover	2m	-	-	-	20	€ 3,50
PRCO-1818	Opal cover	2m	-	-	-	20	€ 4,50

Technical Design



What is included

No.3 caps (one with a cable hole) and metal clips for fastening.



Accessory

PRCV-1818
Transparent Cover



40° PROFILE



KPRI40G-2413
KIT PROFILE
Recessed version

KPRS40G-1713
KIT PROFILE
Surface version

ADVANTAGES

Two meters long aluminium profile for LED strips. Accessories included. Rounded opal cover with 40-degree beam.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT

**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**


APPLICATIONS

Suitable for shops, offices, storefronts, ceilings, corridors, private housing environments.


Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRI40G-2413	KIT PROFILE	2m	17	12.40	13.33	20	€ 26,00
KPRS40G-1713	KIT PROFILE	2m	17	12.40	13.37	20	€ 23,00

Technical Design

KPRI40G-2413 (RECESSED)



KPRS40G-1713 (SURFACE)



What is included

No.3 caps (one with a cable hole).
KPRS40G-1713 is equipped with clips for fastening.



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

SUSPENSION PROFILE



KPRS-3537
KIT PROFILE

ADVANTAGES

Aluminium profile for LED strips. Suspension accessories included. Opal cover for a homogenous effect. Minimal and elegant line.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Suitable for shops, offices, hotel lobby, dining rooms, living rooms, counters and peninsulas of bars and clubs.

Product code	Type	Length	Overall width mm	LED Strip space mm	Max. height from the ceiling mm	Packing	Price
KPRS-3537	KIT PROFILE	2m	35	30	1500	100	€ 99,00

Technical Design



What is included

Suspension kit, junction plate and 3 caps (one with a cable hole).



Groove for suspension hook.



UPLIGHT PROFILE



KPRVE-4217
KIT PROFILE

ADVANTAGES

Two meters long aluminium profile for LED strips. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Suitable for shops, offices, art galleries, ceilings, hallways, living rooms, private housing environments.

Product code	Type	Length	Overall height mm	LED Strip space mm	Thickness mm	Packing	Price
KPRVE-4217	KIT PROFILE	2m	42	12.50	17.45	10	€ 39,00

Technical Design



What is included

No.3 caps (one with a cable hole) and metal clips for fastening.



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

FLOOR PROFILE



KPRCA-2711
KIT PROFILE

ADVANTAGES

Two meters long recessed walk-over aluminium profile for LED strips. Accessories included. Opal cover, hidden installation, flush with the surface.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Suitable for shops, offices, storefronts, shopping malls, corridors, hotel lobby, cinemas, theatres, private houses.

Product code	Type	Length	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRCA-2711	KIT PROFILE	2m	21	12.20	11	20	€ 30,00

Technical Design



What is included

No.3 caps (one with a cable hole).



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

STAIRS PROFILE



KPRSC-6528
KIT PROFILE
Perpendicular light beam



KPRSC-8050
KIT PROFILE
Oblique light beam

ADVANTAGES

1.5mt long aluminium profile for stairs. Accessories included.
Opal cover, minimum footprint.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT

**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**


APPLICATIONS

Ideal for steps of shops, hotels, cinemas, theatres, shopping malls, beauty salons, private houses.


Product code	Type	Length	Walkable width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRSC-6528	KIT PROFILE	1,5m	65	13.3	13.3	6	€ 59,00
KPRSC-8050	KIT PROFILE	1,5m	80	11	13.2	6	€ 72,00

Technical Design

KPRSC-6528 (perpendicular light)



KPRSC-8050 (oblique light)



What is included

No.2 closing caps.



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

PERIMETER PROFILE



KPRBS-1468
KIT PROFILE

ADVANTAGES

Two meters long skirting aluminium profile. Accessories included. Opal cover.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Ideal for shops, offices, shopping malls, corridors, cinemas, theatres, living rooms, private houses.

Product code	Type	Length	Overall height mm	LED Strip space mm	Thickness mm	Packing	Price
KPRBS-1468	KIT PROFILE	2m	58	10.30	12.5	6	€ 99,00

Technical Design




What is included

No.3 caps (one with a cable hole).



LED LINEAR SYSTEMS - ALUMINIUM PROFILES

PLASTER PROFILE

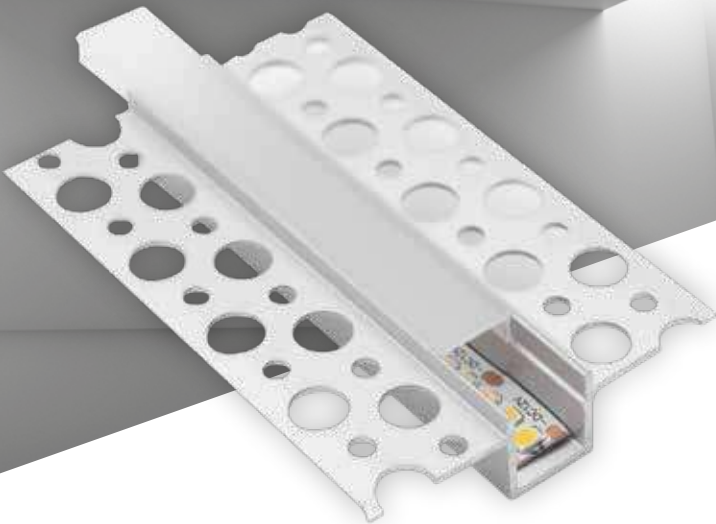

KPRCG-5314
KIT PROFILE

ADVANTAGES

Three meters long aluminium profile for plasterboard. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics



Degree of protection

READY-TO-USE KIT




APPLICATIONS

Ideal for plasterboard of shops, offices, ceilings, storefronts, corridors, private houses.

Product code	Type	Length mm	Wing width mm	Overall width mm	LED Strip space mm	Thickness mm	Packing	Price
KPRCG-5314	KIT PROFILE	3m	20	13	10.5	10	12	€ 59,00
PRCO-5314	Opal cover	3m	-	-	-	-	12	€ 6,90

Technical Design



What is included

No.3 caps (one with a cable hole).



Exclusive Packaging

Rigid carton tube to protect the single element.



PLASTER PROFILE

Outside edge



KPRCG-5123
KIT PROFILE

ADVANTAGES

Three meters long aluminium profile for plasterboard. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics

IP20

Degree of protection

READY-TO-USE KIT


**OPAL COVER
and MOUNTING
ACCESSORIES
INCLUDED**

APPLICATIONS

Ideal for plasterboard of shops, offices, ceilings, storefronts, corridors, private houses.

Product code	Type	Length mm	Wing width mm	Width mm	Angle	LED Strip space mm	Thickness mm	Packing	Price
KPRCG-5123	KIT PROFILE	3m	23.3	13.1	90°	10.5	9.2	12	€ 63,00

Technical Design



What is included

No.3 caps (one with a cable hole).



Exclusive Packaging

Rigid cardboard tube to protect the single element.



PLASTER PROFILE

Internal edge



KPRCG-4626
INTERNAL EDGE
VERSION

ADVANTAGES

Three meters long aluminium profile for plasterboard. Accessories included. Opal cover for a homogenous and refined effect.

Characteristics

IP20


Degree of protection

APPLICATIONS

Ideal for plasterboard of shops, offices, ceilings, storefronts, corridors, private houses.

Product code	Type	Length mm	Wing width mm	Width mm	Angle	LED Strip space mm	Thickness mm	Packing	Price
KPRCG-4626	KIT PROFILE	3m	23.3	13	90°	10.5	8.8	12	€ 63,00

Technical Design



What is included

No.3 caps (one with a cable hole).



Exclusive Packaging

Rigid cardboard tube to protect the single element.





LIGHT IN LINE
WITH ANY STYLE





They know how to adapt to every type of environment, ensuring functional and practical lighting.
They stand out for their simplicity of use and their resistance over time.



LED LINEAR SYSTEMS
CEILINGS

SPEEDY · STABILA · LINKY

LED LINEAR SYSTEMS - CEILING SPEEDY



Linkable in series:

Max 25pz 4W
Max 12pz 8W
Max 10pz 10W
Max 7pz 14W
Max 5pz 18W

ADVANTAGES

Linkable ceiling lights without the need for external connectors. Complete with switch and power cord. The flexible interconnection cable for corners is available separately.

Characteristics

RA	25.000	on off	-50%		IP20	LED
CRI>80	Lifetime (hours)	≥12.500 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Suitable for generic lighting, kitchens and under-cabinet lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
SPD-043030	4W	8W CFL	340Lm	3000K	185-265V/AC 50/60 Hz	130°	23mA	> 0,90	20x313x30	68	6/24	€ 11,90
SPD-043040	4W	8W CFL	340Lm	4000K	185-265V/AC 50/60 Hz	130°	23mA	> 0,90	20x313x30	68	6/24	€ 11,90
SPD-086030	8W	14W CFL	680Lm	3000K	185-265V/AC 50/60 Hz	130°	36mA	> 0,90	20x573x30	210	6/24	€ 15,90
SPD-086040	8W	14W CFL	680Lm	4000K	185-265V/AC 50/60 Hz	130°	36mA	> 0,90	20x573x30	210	6/24	€ 15,90
SPD-109030	10W	21W CFL	850Lm	3000K	185-265V/AC 50/60 Hz	130°	47mA	> 0,90	20x873x30	152	6/24	€ 17,90
SPD-109040	10W	21W CFL	850Lm	4000K	185-265V/AC 50/60 Hz	130°	47mA	> 0,90	20x873x30	152	6/24	€ 17,90
SPD-141230	14W	28W CFL	1190Lm	3000K	185-265V/AC 50/60 Hz	130°	66mA	> 0,90	20x1173x30	190	6/24	€ 19,90
SPD-141240	14W	28W CFL	1190Lm	4000K	185-265V/AC 50/60 Hz	130°	66mA	> 0,90	20x1173x30	190	6/24	€ 19,90
SPD-181540	18W	35W CFL	1350Lm	4000K	185-265V/AC 50/60 Hz	130°	79mA	> 0,90	20x1478x30	245	6/24	€ 25,90


Product code	Packing pcs	Price
RC-SPD	1/100	€ 3,50

Flexible connection cable cm 22



LED LINEAR SYSTEMS - CEILINGS

STABILA

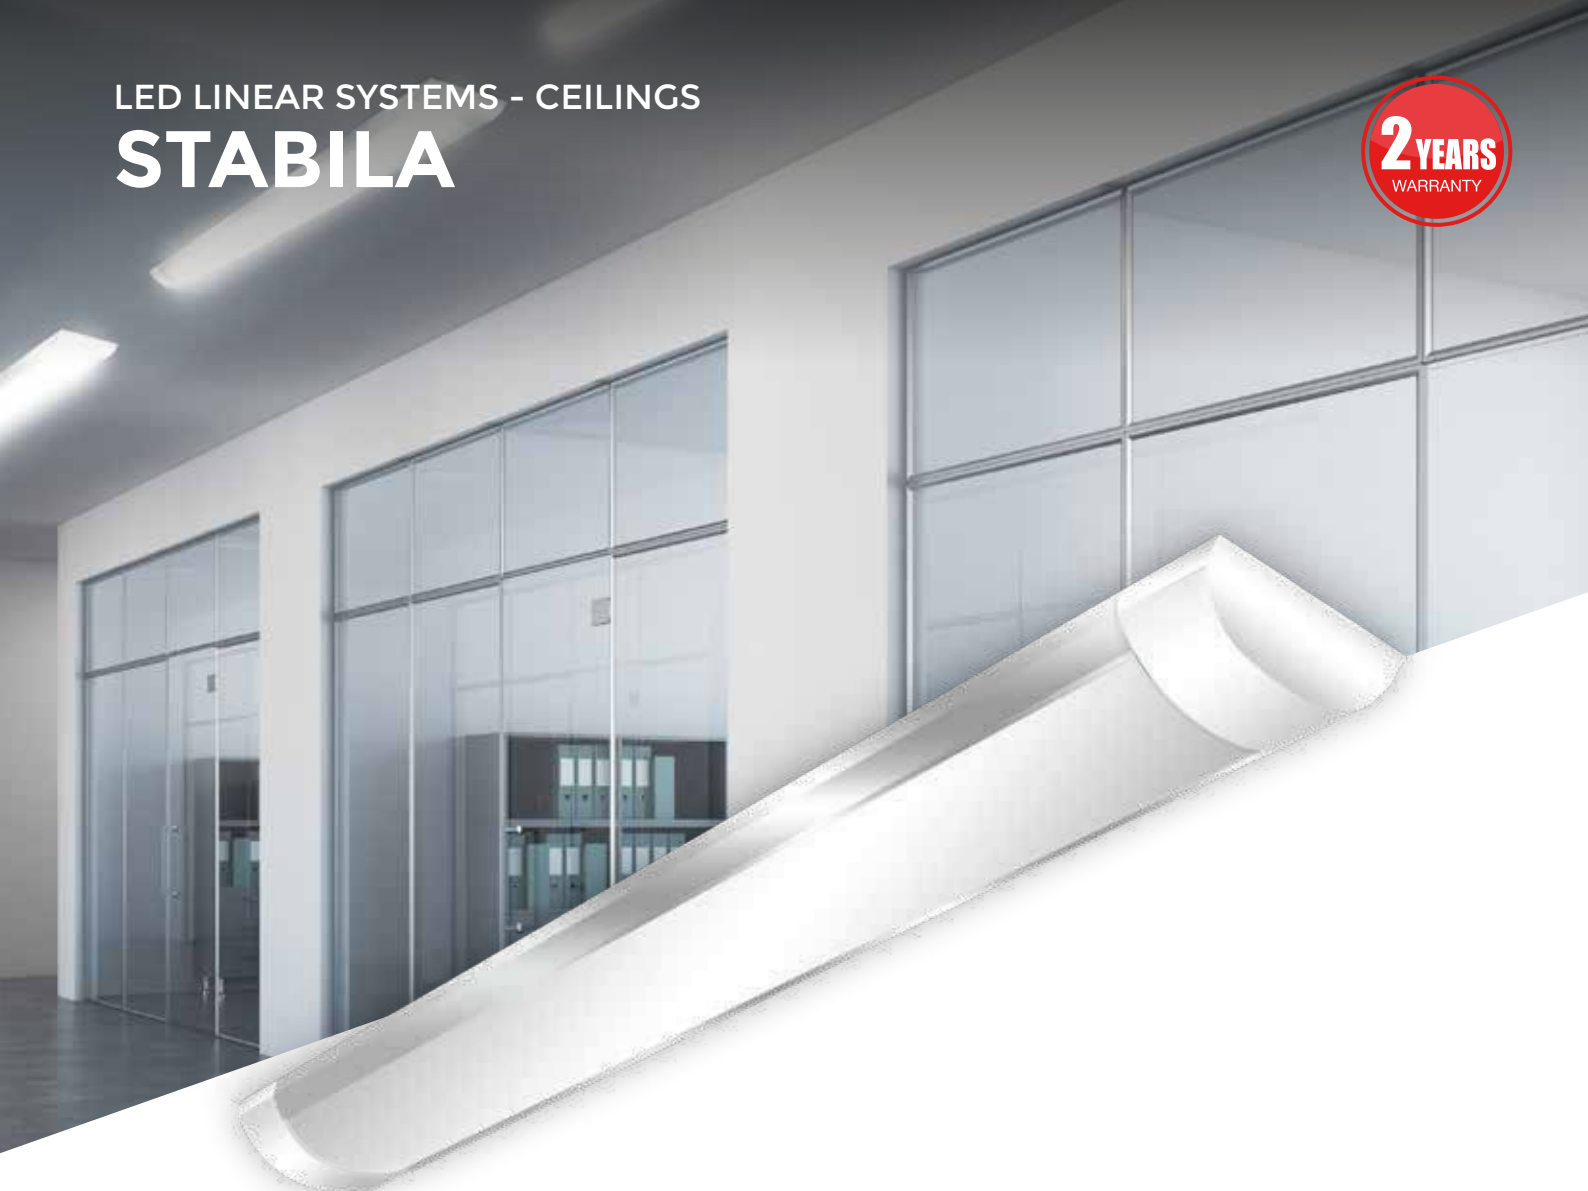

ADVANTAGES

Easy to install, equipped with wall fixing kit, ceiling application, wall and suspension. High-heat aluminium body. Available in different colour temperatures.

Characteristics

RA	30.000	on off	-50%	I	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS


Great solution for home and professional environments, shops, warehouses, offices and houses.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
STB-186030	18W	1x36W CFL	1700Lm	3000K	220-240V/AC 50/60 Hz	120°	85mA	> 0,90	80x600x30	367	1/6	€ 25,90
STB-186040	18W	1x36W CFL	1700Lm	4000K	220-240V/AC 50/60 Hz	120°	85mA	> 0,90	80x600x30	367	1/6	€ 25,90
STB-361230	36W	2X36W CFL	3100Lm	3000K	220-240V/AC 50/60 Hz	120°	170mA	> 0,90	80x1200x30	661	1/6	€ 39,90
STB-361240	36W	2x36W CFL	3100Lm	4000K	220-240V/AC 50/60 Hz	120°	170mA	> 0,90	80x1200x30	661	1/6	€ 39,90
STB-451530	45W	2X58W CFL	4000Lm	3000K	220-240V/AC 50/60 Hz	120°	210mA	> 0,90	80x1500x30	783	1/6	€ 54,90
STB-451540	45W	2x58W CFL	4000Lm	4000K	220-240V/AC 50/60 Hz	120°	210mA	> 0,90	80x1500x30	783	1/6	€ 54,90

Product code	Packing pcs	Price
KIT-PQ40	1/100	€ 3,50

Accessory: suspension kit consisting of 4 cables (150 cm) suitable for two suspensions

18W packed in **PET BLISTER**
36W and 45W packed in **CARTON BOX**



NEW

LED LINEAR SYSTEMS - CEILING

LINKY

Prismatic version

3 YEARS
WARRANTY



ADVANTAGES

Linkable interior ceiling lights, ideal for the realization of continuous row or different geometric shapes with the help of the various junction fittings. Prismatic version. Structure in anodized aluminium with reflector in PC. Ceiling or suspension mounting with kit included.

Characteristics

-80%	I	IP20	LED	F
Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

Includes suspension kit (1.5m)



APPLICATIONS

Applicable in both ceiling and suspension installation, ideal for offices, supermarkets and in all indoor environments with high lighting requirements.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
NEW LNK-321240	32W	60W	3200Lm	4000K	220-240V/AC 50/60 Hz	90°	150mA	≥0,90	1131x50x75	1900	1/6	€ 105,00

Product code	Junction	Price
LNKCNL	Linear junction	€ 5,90
LNKCN2	2-Way adjustable junction	€ 7,90
LNKCN4	4-Way adjustable junction	€ 10,50



LNKCNL








LNKCN2



LNKCN4

Examples of



NEW

LED LINEAR SYSTEMS - CEILINGS

LINKY

Dark light UGR<16



UGR<16
UNIFIED GLARE RATING

ADVANTAGES

Linkable interior ceiling lights, for the realization of continuous row or different geometric shapes with the help of the various junction fittings. Dark light version UGR<16. Structure in anodized aluminium with reflector in PC. Ceiling or suspension mounting with kit included.

Characteristics

-80%	I	IP20	LED	F
Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces



APPLICATIONS

Applicable in both ceiling and suspension interiors, ideal for offices, supermarkets and in all indoor environments with high lighting requirements.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
NEW LNK16-321240	32W	60W	3520Lm	4000K	220-240V/AC 50/60 Hz	90°	150mA	≥0,90	1131x50x75	1900	1/6	€ 139,00

Product code	Junction	Price
LNKCNL	Linear junction	€ 5,90
LNKCN2	2-Way adjustable junction	€ 7,90
LNKCN4	4-Way adjustable junction	€ 10,50



LNKCNL








LNKCN2



LNKCN4


Examples of



CENTURY



Easy to install, they are able to assure excellent technical performance and resistance from dust, liquids and impacts. IP65 and IK08.

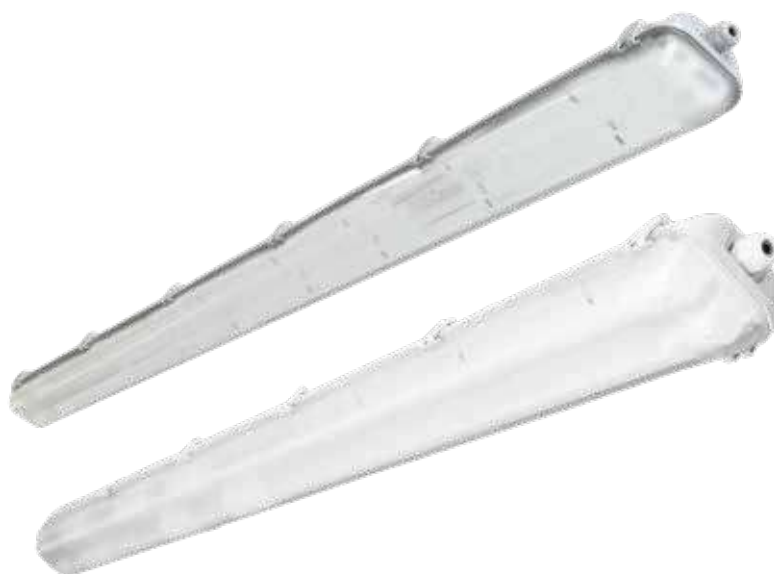

LED LINEAR SYSTEMS

WATERTIGHT LUMINAIRES

SUPREMA-V · SUPREMA ADVANCE · ITALIA · ITALIA ROUND



**LED TUBES ARE
NOT INCLUDED**

ADVANTAGES

Watertight ceiling light for LED tubes with single-sided power, wiring with possibility of internal line derivation. Compatible only with LED Tubes T8 120 cm and 150 cm. LED tubes not included.

Characteristics

Insulation
class



Degree of
protection



Impact
protection




Ok flammable
surfaces

APPLICATIONS

Ideal for indoor parking, warehouses and general lighting.

Product code	Volt/Hertz	Tubes compatibility	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
SPPV-361200	230V50/60Hz	2x18W	1260x99x78	1250	1/10	€ 24,90
SPPV-481500	230V50/60Hz	2x24W	1560x99x78	1500	1/10	€ 29,90

Double tube wiring

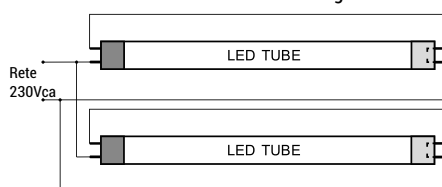

LED LINEAR SYSTEMS - WATERTIGHT LUMINAIRES

SUPREMA ADVANCE

2 YEARS
WARRANTY

**LED TUBES
ARE INCLUDED**

ADVANTAGES

Wiring with the possibility of internal line derivation, excellent replacement of traditional watertight appliances.

Characteristics

RA	30,000	on off	-44%		IP65	LED	IK08	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection	Ok flammable surfaces

APPLICATIONS

Ideal for indoor parking, warehouses, workshops and general lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
SPPA-106040	10W	1x18W CFL	900Lm	4000K	220-240V/AC 50/60 Hz	270°	48mA	> 0,90	78x660x70	647	1/9	€ 22,90
SPPA-181240	18W	1x36W CFL	1700Lm	4000K	220-240V/AC 50/60 Hz	270°	90mA	> 0,90	78x1260x70	1000	1/9	€ 33,50
SPPA-241540	24W	1x58W CFL	2200Lm	4000K	220-240V/AC 50/60 Hz	270°	111mA	> 0,90	87x1563x85	1480	1/9	€ 42,00
SPPA-361240	36W	2X36W CFL	3400Lm	4000K	220-240V/AC 50/60 Hz	270°	180mA	> 0,90	78x1260x100	1640	1/9	€ 45,90
SPPA-481540	48W	2X58W CFL	4400Lm	4000K	220-240V/AC 50/60 Hz	270°	222mA	> 0,90	78x1563x100	1850	1/6	€ 56,90



WHAT IS INCLUDED:

- Stainless steel brackets and spring hooks for ceiling and suspension installations
- Plastic cable gland for serial connection



Aluminium heatsink
for longer life

ADVANTAGES

Injection printed polycarbonate body - RAL 7035 grey. Aluminium internal heatsink with hard LED strip for longer life. Energy savings of 50%.

Characteristics

RA	30.000	on off	-50%		IP65	LED	IK08	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection	Ok flammable surfaces

APPLICATIONS

Ideal for parking, warehouses, workshops and general lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
ITL-186040	18W	2x18W CFL	1650Lm	4000K	220-240V/AC 50/60 Hz	120°	85mA	> 0,90	86x590x66	700	1/6	€ 36,00
ITL-361240	36W	2x36W CFL	3300Lm	4000K	220-240V/AC 50/60 Hz	120°	170mA	> 0,90	86x1180x66	1250	1/6	€ 65,00
ITL-481540	48W	2x58W CFL	4400Lm	4000K	220-240V/AC 50/60 Hz	120°	230mA	> 0,90	86x1480x72	1500	1/6	€ 89,00
ITL-681540	68W	2X70W CFL	7850Lm	4000K	220-240V/AC 50/60 Hz	120°	300mA	> 0,90	86x1480x72	1500	1/6	€ 99,00

WHAT IS INCLUDED:

- Stainless steel brackets and spring hooks for ceiling and suspension installations
- Plastic cable gland for serial connection

Serial installation:

- Max 12pz 18W
- Max 8pz 36W
- Max 6pz 48W
- Max 4pz 68W

NEW

LED LINEAR SYSTEMS - WATERTIGHT LUMINAIRES

ITALIA ROUND

2 YEARS
WARRANTY



ALSO IN EMERGENCY VERSION

EMERGENCY*
3H
AUTONOMY

cod.ITLRE

ITLR

ITLRE - Emergency Version

ADVANTAGES

Injection printed polycarbonate body. Aluminium internal heat-sink for longer life. Energy savings of 50%.

Characteristics

RA	30,000	on off	-50%	I	IP65	LED	IK08	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection	Ok flammable surfaces

APPLICATIONS

Ideal for parking lots, warehouses, workshops and general lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Lxlxh mm	Weight gr	Packing pcs	Price
NEW ITLR-186040	18W	2x18W Fluo	1650Lm	4000K	230V 50/60Hz	120°	85mA	>0,9	610x100x66	700	1 / 6	€ 36,00
NEW ITLR-361240	36W	2x36W Fluo	3960Lm	4000K	230V 50/60Hz	120°	164mA	>0,9	1210x100x75	1400	1 / 6	€ 55,00
NEW ITLR-481540	48W	2x48W Fluo	4500Lm	4000K	230V 50/60Hz	120°	220mA	>0,9	1510x100x75	1750	1 / 6	€ 75,00
NEW ITLR-601540	60W	2x60W Fluo	5625Lm	4000K	230V 50/60Hz	120°	250mA	>0,9	1510x100x75	1750	1 / 6	€ 82,00
NEW ITLRE-401240	40W	2x40W Fluo	4200Lm	4000K	230V 50/60Hz	120°	178mA	>0,9	1210x100x75	1700	1 / 6	€ 139,00
NEW ITLRE-401540	40W	2x40W Fluo	4200Lm	4000K	230V 50/60Hz	120°	178mA	>0,9	1510x100x75	2100	1 / 6	€ 149,00
NEW ITLRE-601540	60W	2x60W Fluo	6000Lm	4000K	230V 50/60Hz	120°	270mA	>0,9	1510x100x75	2100	1 / 6	€ 165,00

Accessory ITLRE

Product code	Description	Price
RKITLER	Emergency kit replacement	€ 95,00

*Warranty on battery: 1 year



LED PANELS

They have an extraordinary ability to make the rooms bright and modern. They are the ideal solution to illuminate offices, commercial areas and hotels with elegance. Long life and evenly distributed light without glare ($UGR < 19$) and flickers free. For incomparable visual comfort.



RECESSED · SURFACE · ACCESSORIES



They blend with the environment giving pleasant and quality lighting. Available in different sizes and shapes to meet every kind of need.










LED PANELS

RECESSED

P-TONDO · FRISBEE · FRISBEE QUADRO · P-QUADRO · P-QUADRO ADVANCE
P-QUADRO 42U · P-QUADRO ADVANCE BACKLIGHT
· P-QUADRO40 ADVANCE · P-LINE 40 ·
P-QUADRO Elegance · MARATEA · FALSE PANEL · P-QUADRO Recessed

LED PANELS - RECESSED P-TONDO



ADVANTAGES

Anti-glare optics, external power supply included, no UV and IR rays.
Elegant ultra-thin design.

Characteristics

							
CRI>82	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PT-038530	3W	28W ALO	180Lm	3000K	100-240VAC 50/60 Hz	120°	17mA	> 0,95	85x15	79	6/24	€ 8,90
NEW PT-038540	3W	28W ALO	180Lm	4000K	100-240V/AC 50/60 Hz	120°	17mA	> 0,95	85x15	79	6/24	€ 8,90
PT-061230	6W	13W CFL	400Lm	3000K	100-240VAC 50/60 Hz	120°	32mA	> 0,95	120x15	168	6/24	€ 10,90
NEW PT-061240	6W	13W CFL	400Lm	4000K	100-240VAC 50/60 Hz	120°	32mA	> 0,95	120x15	168	6/24	€ 10,90
PT-091430	9W	18W CFL	600Lm	3000K	100-240VAC 50/60 Hz	120°	46mA	> 0,95	147x15	145	6/24	€ 13,90
NEW PT-091440	9W	18W CFL	600Lm	4000K	100-240VAC 50/60 Hz	120°	46mA	> 0,95	147x15	145	6/24	€ 13,90
PT-121730	12W	20W CFL	960Lm	3000K	100-240VAC 50/60 Hz	120°	57mA	> 0,90	170x15	267	6/24	€ 15,90
PT-121740	12W	20W CFL	960Lm	4000K	100-240V/AC 50/60 Hz	120°	57mA	> 0,95	170x15	267	6/24	€ 15,90
PT-182230	18W	36W CFL	1440Lm	3000K	100-240VAC 50/60 Hz	120°	85mA	> 0,90	220x15	382	6/24	€ 18,90
PT-182240	18W	36W CFL	1440Lm	4000K	100-240VAC 50/60 Hz	120°	85mA	> 0,95	220x15	382	6/24	€ 18,90
PT-243030	24W	50W CFL	1920Lm	3000K	100-240VAC 50/60 Hz	120°	120mA	> 0,95	300x15	532	6/12	€ 26,50
PT-243040	24W	50W CFL	1920Lm	4000K	100-240VAC 50/60 Hz	120°	120mA	> 0,95	300x15	532	6/24	€ 26,50

ACCESSORIES:

EMERGENCY KIT code Kit-EMG, KIT-EMG2
compatible with 12W, 18W and 24W - Page 197

Replacement DRIVER code RDPQ12-18
compatible with 12W and 18W - Page 196

LED PANELS - RECESSED

FRISBEE



NEW 2in1

- Ceiling and recessed
- Easy to install
- Suitable for holes from $\varnothing$ 65 mm to $\varnothing$ 155 mm (12W) or from $\varnothing$ 65 mm to $\varnothing$ 205 mm (18W)



SUPER SLIM



ADJUSTABLE SPRINGS



CEILING FIX

ADVANTAGES

Dual mounting solution: ceiling and recessed, built-in no-flicker driver, sleek and compact design with only 15mm thick.

Characteristics


RA	30.000	on off	-50%		IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots and supermarkets.


Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
FRB-121830	12W	24W CFL	960Lm	3000K	220-240V/AC 50/60 Hz	120°	100mA	> 0,50	180x15	216	1/20	€ 26,50
FRB-121840	12W	24W CFL	960Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	> 0,50	180x15	216	1/20	€ 26,50
FRB-182330	18W	36W CFL	1440Lm	3000K	220-240V/AC 50/60 Hz	120°	142mA	> 0,50	230x15	346	1/20	€ 29,00
FRB-182340	18W	36W CFL	1440Lm	4000K	220-240V/AC 50/60 Hz	120°	142mA	> 0,50	230x15	346	1/20	€ 29,00

1 - Recessed fixing



from $\varnothing$ 65 mm to $\varnothing$ 155 mm (12W)
from $\varnothing$ 65 mm to $\varnothing$ 205 mm (18W)

2 - Ceiling fixing

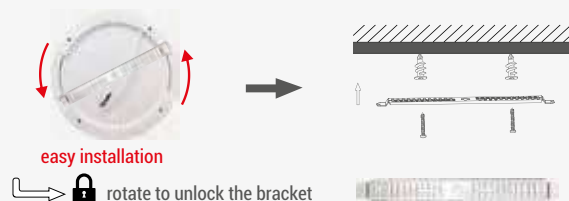


LED PANELS - RECESSED

FRISBEE QUADRO




NEW 2in1


- Ceiling and recessed
- Easy to install
- Suitable for holes from $\varnothing$ 65 mm to $\varnothing$ 155 mm (12W) or from $\varnothing$ 65 mm to $\varnothing$ 205 mm (18W)



SUPER SLIM



ADJUSTABLE SPRINGS



CEILING FIX

ADVANTAGES

Dual mounting solution: ceiling and recessed, built-in no-flicker driver, sleek and compact design with only 15mm thick.

Characteristics


RA	30.000	on off	-50%		IP20	LED	F
CRI>80	Lifetime (hours)	≥ 15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots and supermarkets.


Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
FRBS-121830	12W	24W CFL	960Lm	3000K	220-240V/AC 50/60 Hz	120°	100mA	> 0,50	180x180x15	290	1/20	€ 26,00
FRBS-121840	12W	24W CFL	960Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	> 0,50	180x180x15	290	1/20	€ 26,00
FRBS-182330	18W	36W CFL	1440Lm	3000K	220-240V/AC 50/60 Hz	120°	142mA	> 0,50	230x230x15	450	1/20	€ 29,00
FRBS-182340	18W	36W CFL	1440Lm	4000K	220-240V/AC 50/60 Hz	120°	142mA	> 0,50	230x230x15	450	1/20	€ 29,00

1 - Recessed fixing



from $\varnothing$ 65 mm to $\varnothing$ 155 mm (12W)
from $\varnothing$ 65 mm to $\varnothing$ 205 mm (18W)

2 - Ceiling fixing

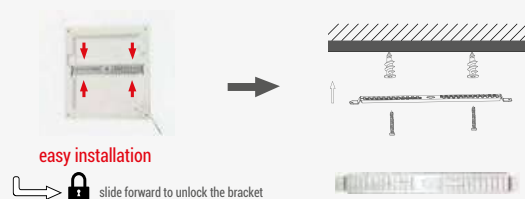



LED PANELS - RECESSED P-QUADRO




3W





12W




6W





18W



9W



24W



ADVANTAGES

Anti-glare optics, external power supply included, no UV and IR rays.
Elegant ultra-thin design.

Characteristics

RA	30.000	on off	-89%	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class
						Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
PQ-038530	3W	28W ALO	180Lm	3000K	100-240VAC 50/60 Hz	120°	17mA	> 0,95	85x85x15	89	6/24	€ 8,50
NEW PQ-038540	3W	28W ALO	180Lm	4000K	100-240VAC 50/60 Hz	120°	17mA	> 0,95	85x85x15	111	6/24	€ 8,50
PQ-061230	6W	13W CFL	400Lm	3000K	100-240VAC 50/60 Hz	120°	32mA	> 0,95	120x120x15	203	6/24	€ 10,50
NEW PQ-061240	6W	13W CFL	400Lm	4000K	100-240VAC 50/60 Hz	120°	32mA	> 0,95	120x120x15	203	6/24	€ 10,50
PQ-091430	9W	18W CFL	600Lm	3000K	100-240VAC 50/60 Hz	120°	46mA	> 0,95	147x147x15	145	6/24	€ 13,50
NEW PQ-091440	9W	18W CFL	600Lm	4000K	100-240VAC 50/60 Hz	120°	46mA	> 0,95	147x147x15	145	6/24	€ 13,50
PQ-121730	12W	20W CFL	960Lm	3000K	100-240VAC 50/60 Hz	120°	57mA	> 0,95	170x170x15	206	6/24	€ 15,50
PQ-121740	12W	20W CFL	960Lm	4000K	100-240VAC 50/60 Hz	120°	57mA	> 0,95	170x170x15	320	6/24	€ 15,50
PQ-182230	18W	36W CFL	1440Lm	3000K	100-240VAC 50/60 Hz	120°	85mA	> 0,95	225x225x15	310	6/24	€ 18,90
PQ-182240	18W	36W CFL	1440Lm	4000K	100-240VAC 50/60 Hz	120°	85mA	> 0,95	225x225x15	310	6/24	€ 18,90
PQ-243030	24W	50W CFL	1920Lm	3000K	100-240VAC 50/60 Hz	120°	120mA	> 0,95	300x300x15	542	6/12	€ 26,50
PQ-243040	24W	50W CFL	1920Lm	4000K	100-240VAC 50/60 Hz	120°	120mA	> 0,95	300x300x15	542	6/12	€ 26,50

P-QUADRO ADVANCE

Elegantly designed, ultra-thin LED panels blend seamlessly with the interiors.

FLICKER FREE

UGR<19
UNIFIED GLARE RATING

The light is distributed evenly, without glare (**UGR<19**) and **FLICKER FREE**. Without any kind of dangerous effect.

Over

92

Lumen/Watt

More than

15.000

Switches

VISUAL COMFORT

The innovative technology **improves lighting** **perceptive quality**, ensures maximum visual comfort and creates a **pleasant and natural environment**.

Over

58%

savings



LED PANELS - RECESSED

P-QUADRO ADVANCE

30 X 60 // 30 X 120

PRO
LINE**UGR<19**
UNIFIED GLARE RATING

NOW ALSO IN

**PQA**
24 W - 30 x 60**PQA / PQA90**
42 W - 30 x 120**ADVANTAGES**

Anti-glare and no-flicker panel, no UV and IR rays. It has an external power supply (prewired on the secondary side). Available in different light colour temperatures.

Characteristics

RA	30.000	on off	-52%		IP43	IK02	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
PQA-243030	24W	50W CFL	1840Lm	3000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,50	295x595x10	945	1/6	€ 34,90
PQA-243040	24W	50W CFL	1950Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,50	295x595x10	945	1/6	€ 34,90
PQA-421230	42W	100W CFL	3900Lm	3000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	295x1195x10	1980	1/6	€ 55,00
PQA-421240	42W	100W CFL	3900Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	295x1195x10	1980	1/6	€ 55,00
NEW PQA90-421230	42W	100W CFL	3900 Lm	3000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	295x1195x10	1980	1/6	€ 63,90
NEW PQA90-421240	42W	100W CFL	3900 Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	295x1195x10	1980	1/6	€ 63,90

ACCESSORIES 24W:

EMERGENCY KIT Cod. KIT-EMG, KIT-EMG2 Pag. 197
SUSPENSION KIT Cod. KIT-PQ40 Pag. 198
CLIP KIT Cod. KIT-CLIP Pag. 198
DRIVER REPLACEMENT Cod. RDPQA24 Pag. 196

ACCESSORIES 42W:

DIMMABLE DRIVER Cod. DRIMPQ40 Pag. 197
DIMMABLE DRIVER Cod. DRIMPQ42 Pag. 197
DIMMABLE DRIVER DALI Cod. DRIMPQ42D Pag. 198
DRIVER REPLACEMENT Cod. RDPQA42 Pag. 196
 Cod. RDPQA42AGT Pag. 196
CEILING KIT Cod. KIT-PLF120 Pag. 199
EMERGENCY KIT Cod. KIT-EMG, KIT-EMG2 Pag. 197
DAYLIGHT SENSOR Cod. SENS DL1-10 Pag. 198
 (function available only with **DIMMABLE DRIVER 1-10V** add. DRIMPQ42)
SUSPENSION KIT Cod. KIT-PQ40 Pag. 198
CLIP KIT Cod. KIT-CLIP Pag. 198

LED PANELS - RECESSED

P-QUADRO ADVANCE

60 X 120

PRO
LINE



UGR<19
UNIFIED GLARE RATING

PQA
80 W - 60 x 120

ADVANTAGES

Anti-glare and no-flicker panel, no UV and IR rays. It has an external power supply (prewired on the secondary side). Available in different colour temperatures.

Characteristics

RA	30.000	on off	-43%		IP20	IK02	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
PQA-806040	80W	140W CFL	6800Lm	4000K	220-240V/AC 50/60 Hz	120°	382mA	≥0,90	595x1195x10	4380	1/4	€ 139,00

ACCESSORIES:

DIMMABLE DRIVER
DIMMABLE DRIVER DALI
DRIVER REPLACEMENT
EMERGENCY KIT
DAYLIGHT SENSOR
(function available only with **DIMMABLE DRIVER 1-10V** cod. DRIMPQ42)
SUSPENSION KIT

Cod. DRIMPQ40 (2 driver) Pag. 197
Cod. DRIMPQ42D (2 driver) Pag. 198
Cod. RDPQA42 (2 driver) Pag. 196
Cod. KIT-EMG, KIT-EMG2 Pag. 197
Cod. SENS DL1-10 Pag. 198
Cod. KIT-PQ40 Pag. 198

LED PANELS - RECESSED

P-QUADRO ADVANCE

60 x 60

PRO
LINE**UGR<19**
UNIFIED GLARE RATING

PQA



PQA90



ADVANTAGES

Anti-glare and no-flicker panel, no UV and IR rays. It has an external power supply (prewired on the secondary side). Available in different colour temperatures and in CRI90 version.

Characteristics

RA	30.000	on off	-58%		IP43	IK02	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, passage of interiors, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
PQA-426030	42W	100W CFL	3800Lm	3000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	2200	1/6	€ 45,90
PQA-426040	42W	100W CFL	3900Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	2200	1/6	€ 45,90
PQA-426060	42W	100W CFL	3900Lm	6000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	2200	1/6	€ 45,90
NEW PQA90-426030	42W	100W CFL	3900Lm	3000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	2200	1/6	€ 49,90
PQA90-426040	42W	100W CFL	3900Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	2200	1/6	€ 49,90

ACCESSORIES:

DIMMABLE DRIVER
DIMMABLE DRIVER
DIMMABLE DRIVER DALI
DRIVER REPLACEMENT

Cod. DRIMPQ40 Pag. 197
Cod. DRIMPQ42 Pag. 198
Cod. DRIMPQ42D Pag. 198
Cod. RDPQA42 Pag. 196
Cod. RDPQA42AGT Pag. 196

CEILING KIT
EMERGENCY KIT
DAYLIGHT SENSOR

(function available only with **DIMMABLE DRIVER 1-10V** cod. DRIMPQ42)

SUSPENSION KIT
CLIP KIT

Cod. KIT-PLF Pag. 199
Cod. KIT-EMG, KIT-EMG2 Pag. 197
Cod. SENSDL1-10 Pag. 198
Cod. KIT-PQ40 Pag. 198
Cod. KIT-CLIP Pag. 198

**CENTURY**

LED PANELS - RECESSED

P-QUADRO ADVANCE

Driver not included - 60 x 60

PRO
LINE



UGR<19
UNIFIED GLARE RATING



**DRIVER CAN BE
PURCHASED SEPARATELY**

ADVANTAGES

Drivers can be purchased separately. No UV and IR rays, no glare and no-flicker. Elegant and ultra-thin design.

Characteristics

RA	30.000	on off	-58%		IP20	IK07	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interiors areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
PQAN-426040	42W	100W CFL	3900Lm	4000K	38-42VDC	120°	950mA	> 0,90	595x595x10	2200	1/6	€ 33,90

ACCESSORIES:

DIMMABLE DRIVER
DIMMABLE DRIVER
DIMMABLE DRIVER DALI
DRIVER REPLACEMENT
CEILING KIT
EMERGENCY KIT
DAYLIGHT SENSOR
(function available only with **DIMMABLE DRIVER 1-10V** cod. DRIMPQ42)
SUSPENSION KIT
CLIP KIT

Cod. DRIMPQ40 Pag. 197
Cod. DRIMPQ42 Pag. 198
Cod. DRIMPQ42D Pag. 198
Cod. RDPQA42AGT Pag. 196
Cod. KIT-PLF Pag. 199
Cod. KIT-EMG, KIT-EMG2 Pag. 197
Cod. SENSDL1-10 Pag. 198
Cod. KIT-PQ40 Pag. 198
Cod. KIT-CLIP Pag. 198

LED PANELS - RECESSED

PRO
LINE



P-QUADRO 42U

Prismatic - 60 x 60

UGR<19
UNIFIED GLARE RATING



PRISMATIC
DIFFUSER



ADVANTAGES

It can be directly installed in false-ceiling panels. **LIFUD** driver included, no-glare and no-flicker.

Characteristics

RA	30.000	on off	-58%		IP40	LED	F
CRI>82	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
PQ42U-426040	42W	100W CFL	3950Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	3000	1/6	€ 79,00

ACCESSORIES:

DIMMABLE DRIVER	Cod. DRIMPQ40 Pag. 197
DIMMABLE DRIVER	Cod. DRIMPQ42 Pag. 198
DIMMABLE DRIVER DALI	Cod. DRIMPQ42D Pag. 198
DRIVER REPLACEMENT	Cod. RDPQA42AGT Pag. 196
CEILING KIT	Cod. KIT-PLF Pag. 199
EMERGENCY KIT	Cod. KIT-EMG, KIT-EMG2 Pag. 197
DAYLIGHT SENSOR	Cod. SENSDL1-10 Pag. 198
(function available only with DIMMABLE DRIVER 1-10V cod. DRIMPQ42)	
SUSPENSION KIT	Cod. KIT-PQ40 Pag. 198
CLIP KIT	Cod. KIT-CLIP Pag. 198

NEW

LED PANELS - RECESSED

P-QUADRO ADVANCE

Backlight - 60 x 60

3 YEARS
WARRANTY

UGR<19
UNIFIED GLARE RATING



SLIM FRAME

only 6 mm I



ADVANTAGES

Recessed false-ceiling panels, with Backlight technology: the LED system is installed parallel to the diffuser. Taking advantage of the greater space of the recess, it ensures a better homogeneity of diffusion. FLICKER FREE and UGR<19.

Characteristics

							
CRI>80	Lifetime (hours)	≥15.000 Switches	Insulation class	Degree of protection Front	Degree of protection Recessed	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW PQAB-426040	42W	100W CFL	4100Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x32	1500	1/4	€ 38,00

ACCESSORIES:
CEILING KIT

Cod. KIT-PLFB Pag. 199

New drivers page 196

Product code	Description	Price
--------------	-------------	-------

NEW RDPQAB42AGT Driver replacement **€ 11,90**

NEW

LED PANELS - RECESSED

P-QUADRO40 ADVANCE

IP65 - 60 x 60

**ADVANTAGES**

IP65 panel is fully protected from dust and liquids. IP65 drivers and connectors are included. Strong aluminium structure for high durability.

Characteristics

RA	30.000	on off		IP65
CRI>80	Lifetime (hours)	≥15.000 Switches	Insulation class	Degree of protection

APPLICATIONS

Ideal for external or special applications (e.g. sterile environments).

TOTAL PROTECTION FROM DUST AND WATER**NO Flicker**

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW PQA65-406040	40W	100W	3900Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	2750	1/6	€ 139,00

LED PANELS - RECESSED

P-LINE 40

60 x 60

PRO
LINE



3600 Lumens of continuous light with no dark corners

ADVANTAGES

Recessed or suspended installation thank to KIT-PLINE. Continuous light frame only 10mm thick, 1.5m cable supplied. **LIFUD** driver included.

Characteristics

RA	25.000	on off	-60%		IP20	LED	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for shops, reception, offices, living and suspended compositions.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
PL-406040	40W	100W CFL	3500Lm	4000K	220-240V/AC 50/60 Hz	120°	200mA	> 0,90	595x595x10	400	1/10	€ 39,00

ACCESSORIES:

DIMMABLE DRIVER

Cod. DRIMPQ40 Pag. 197

DIMMABLE DRIVER

Cod. DRIMPQ42 Pag. 197

DIMMABLE DRIVER DALI

Cod. DRIMPQ42D Pag. 198

EMERGENCY KIT

Cod. KIT-EMG, KIT-EMG2 Pag.197

DAYLIGHT SENSOR

Cod. SENSDL1-10 Pag. 198

(function available only with **DIMMABLE DRIVER 1-10V** cod. DRIMPQ42)

SUSPENSION KIT

Cod. KIT-PLINE Pag.198

LED PANELS - RECESSED

P-QUADRO elegance

30 x 120

PRO
LINE



UGR<13
UNIFIED GLARE RATING



Equipped with special lenses for
homogeneous light diffusion

ADVANTAGES

UGR<13 lighting panel without any kind of flickering or glare. Ideal for environments with high lighting requirements. Included **LIFUD** driver.

Characteristics

RA	30.000	on off	-64%		IP20	IK08	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
PQEL1-3612040	36W	100W CFL	3600Lm	4000K	220-240V/AC 50/60 Hz	73°	200mA	> 0,95	300x1200x20	2850	1/5	€ 99,00

ACCESSORIES:

DIMMABLE DRIVER	Cod. DRIMPQ40 Pag. 197
DIMMABLE DRIVER	Cod. DRIMPQ42 Pag. 197
DIMMABLE DRIVER DALI	Cod. DRIMPQ42D Pag. 198
EMERGENCY KIT	Cod. KIT-EMG, KIT-EMG2 Pag.197
DAYLIGHT SENSOR	Cod. SENSDL1-10 Pag. 198
(function available only with DIMMABLE DRIVER 1-10V cod. DRIMPQ42)	
SUSPENSION KIT	Cod. KIT-PLINE Pag.198

LED PANELS - RECESSED

P-QUADRO elegance

60 x 60

PRO
LINE



UGR<13
UNIFIED GLARE RATING



Equipped with special lenses for
homogeneous light diffusion

ADVANTAGES

UGR<13 lighting panel without any kind of flickering or glare. Ideal for environments with high lighting requirements. Included **LIFUD** driver.

Characteristics

RA	30.000	on off	-64%		IP20	IK08	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
PQEL2-366040	36W	100W CFL	3600Lm	4000K	220-240V/AC 50/60 Hz	73°	200mA	> 0,95	597x597x20	2850	1/5	€ 85,00

ACCESSORIES:

DIMMABLE DRIVER

Cod. DRIMPQ40 Pag. 197

DIMMABLE DRIVER

Cod. DRIMPQ42 Pag. 197

DIMMABLE DRIVER DALI

Cod. DRIMPQ42D Pag. 198

EMERGENCY KIT

Cod. KIT-EMG, KIT-EMG2 Pag.197

DAYLIGHT SENSOR

Cod. SENSDL1-10 Pag. 198

(function available only with **DIMMABLE DRIVER 1-10V** cod. DRIMPQ42)

SUSPENSION KIT

Cod. KIT-PQ40, KIT-PQE Pag. 198

LED PANELS - RECESSED

P-QUADRO elegance

60 x 60

PRO
LINE



UGR<13
UNIFIED GLARE RATING



Equipped with special lenses for
homogeneous light diffusion

ADVANTAGES

UGR<13 lighting panel without any kind of flickering or glare. Ideal for environments with high lighting requirements. Included **LIFUD** driver.

Characteristics

RA	30.000	on off	-50%		IP20	IK08	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
PQEL4-606040	60W	120W CFL	6000Lm	4000K	220-240V/AC 50/60 Hz	73°	340mA	> 0,95	597x597x20	3450	1/5	€ 125,00

ACCESSORIES:

EMERGENCY KIT
SUSPENSION KIT

Cod. KIT-EMG, KIT-EMG2 Pag.197
Cod. KIT-PQ40, KIT-PQE Pag. 198

LED PANELS - RECESSED

MARATEA

60 x 60

PRO
LINE



MRT1

MRT2

ADVANTAGES

It can be directly installed in false-ceiling panels. External power supply included, **LIFUD** driver. No UV and IR rays, anti-glare and flicker-free.

Characteristics

RA	50.000	on off	-60%		IP20	LED	
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Suitable for general lighting of corridors, shops, reception, interior passage areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
MRT1-406040	40W	100W CFL	4200Lm	4000K	220-240V/AC 50/60 Hz	167°	187mA	> 0,90	595x595x85	2700	1/4	€ 75,00
MRT2-406040	40W	100W CFL	4400Lm	4000K	220-240V/AC 50/60 Hz	160°	187mA	> 0,90	595x595x85	3200	1/4	€ 85,00

PANNELLI - RECESSED

FALSE PANEL

60 x 60



SKYLINE PANEL
Ideal for skylights.
For natural light diffusion.

ADVANTAGES

Passive lighting system that captures ambient/solar light above. It optimally spreads natural light saving energy costs.

Characteristics

IP20

Degree of protection

APPLICATIONS

Installable in ceilings with natural light source.

Product code	Length mm	Width mm	Height mm	Weight gr	Packing pcs	Price
PQAFM-6060	595	595	10	640	1/6	€ 17,90

NEW

LED PANELS - RECESSED

P-QUADRO recessed

62 x 62

2 YEARS
WARRANTY



PQR
40W - 62 X 62

INVISIBLE FRAME
ONLY 1MM

ADVANTAGES

LED panel with innovative design and hidden installation effect, for plasterboard applications. Ultra-thin frame only 1 mm thick. External power supply included, without UV and IR rays.

Characteristics

RA	30.000	on off	-60%		IP20	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Suitable for lighting in hallways, shops, reception, interior areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Hole dimensions	Weight gr	Packing pcs	Price
NEW PQR-406230	40W	100W CFL	3700Lm	3000K	230V 50/60Hz	120°	180mA	>0,9	620x620x8	600x600	1750	1 / 6	€ 55,00
NEW PQR-406240	40W	100W CFL	3700Lm	4000K	230V 50/60Hz	120°	180mA	>0,9	620x620x8	600x600	1750	1 / 6	€ 55,00



Clips for hidden installations.

Special hidden applications
for plasterboard

NEW

LED PANELS - RECESSED

P-QUADRO recessed**2 YEARS**
WARRANTY

Shards of light

PRL
18W - 60 X 10**PRL**
36W - 120 X 10**INVISIBLE FRAME**
ONLY 1MM**ADVANTAGES**

LED panel with innovative design and hidden installation effect, for plasterboard applications. Ultra-thin frame only 1 mm thick. External power supply supplied, without UV and IR rays.

Characteristics

RA	30.000	on off	-60%		IP20	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Suitable for lighting in hallways, shops, reception, interior areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Hole dimensions	Weight gr	Packing pcs	Price
NEW PRL-186030	18W	-	700Lm	3000K	230V 50/60Hz	120°	86mA	>0,9	600x100x8	80x580	350	1 / 6	€ 32,00
NEW PRL-186040	18W	-	700Lm	4000K	230V 50/60Hz	120°	86mA	>0,9	600x100x8	80x580	350	1 / 6	€ 32,00
NEW PRL-361230	36W	-	1476Lm	3000K	230V 50/60Hz	120°	158mA	>0,9	1200x100x8	80x1180	700	1 / 6	€ 48,00
NEW PRL-361240	36W	-	1476Lm	4000K	230V 50/60Hz	120°	158mA	>0,9	1200x100x8	80x1180	700	1 / 6	€ 48,00




Clips for hidden installations.

Special hidden applications
for plasterboard



The simplicity and essentiality of the shapes create a minimal and elegant light effect. Lines and colours are well integrated in the environments making them welcoming spaces.

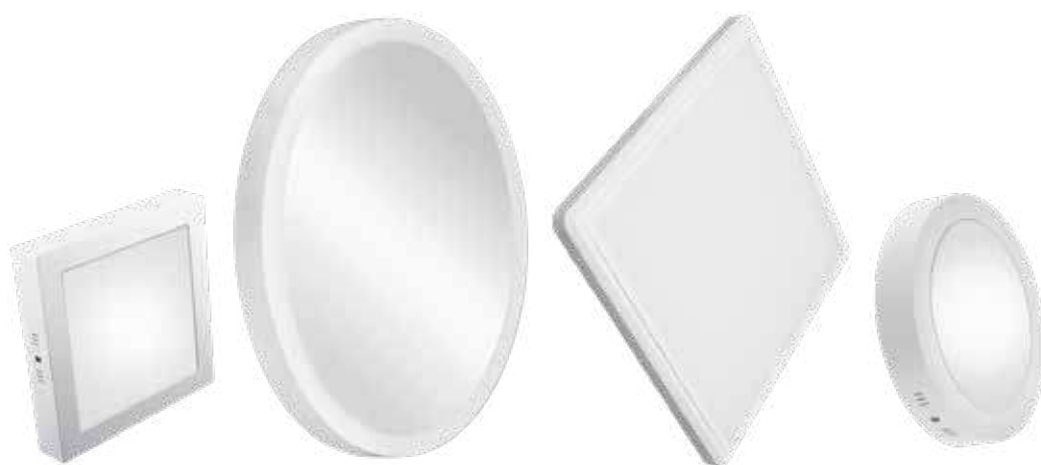

LED PANELS

SURFACE

PL-TONDO · PL-QUADRO · PL-QUADRO 47

LED PANELS - SURFACE

PL-TONDO



PTP
36W
Ø 51 cm



PTP
48W
Ø 60 cm

ADVANTAGES

Elegantly designed circular panels with ceiling mounting available in two diameters, 51 cm and 60 cm. Power supply included.

Characteristics

RA	35.000	on off	-55%		IP20	LED	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for corridors, shops, reception, interior crossing areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PTP-365040	36W	80W CFL	3060Lm	4000K	100-240V/AC 50/60 Hz	120°	170mA	> 0,90	510x39	2300	1/5	€ 95,00
PTP-486040	48W	100W CFL	4320Lm	4000K	100-240V/AC 50/60 Hz	120°	230mA	> 0,90	603x40	3240	1/5	€ 115,00



PQP
22,5x22,5 cm - 29,5x29,5 cm



PTP
Ø 22 cm - Ø 30 cm

ADVANTAGES

White aluminium body, compact and elegant design. Power supply included.

Characteristics

RA	30.000	on off	-50%		IP20	LED	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for corridors, shops, reception, interior crossing areas, parking lots, offices and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
PQP-182240	18W	36W	1440Lm	4000K	100-240V/AC 50/60 Hz	120°	87mA	≥0,95	225x225x36	394	6/24	€ 26,50
PQP-243040	24W	50W	1920Lm	4000K	100-240V/AC 50/60 Hz	120°	120mA	≥0,95	295x295x36	845	6/12	€ 31,00
PTP-182240	18W	36W	1440Lm	4000K	100-240V/AC 50/60 Hz	120°	87mA	≥0,95	220x36	489	6/24	€ 26,50
PTP-243040	24W	50W	1920Lm	4000K	100-240V/AC 50/60 Hz	120°	120mA	≥0,95	300x36	860	6/12	€ 31,00

LED PANELS - SURFACE

PL-QUADRO 47

62 x 62

PRO
LINE



ADVANTAGES

Installable directly to the ceiling, power supply included. No UV and IR rays, anti-glare and flicker-free.

Characteristics

RA	50.000	on off	-53%	I	IP40	LED	F
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for corridors, shops, reception, offices, lounges, meeting rooms and hotels.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
PQPLF-476240	47W	100W CFL	4000Lm	4000K	220-240V/AC 50/60 Hz	120°	230mA	≥0,94	625x625x52	3200	1/4	€ 75,00



THE RIGHT LIGHT
FOR YOUR INTERIORS





LED PANELS

ACCESSORIES

It's the details that make the difference. These essential complements enable LED sources to make the most of their potential, giving a high-performance, efficient and intelligent light to the surroundings.



DRIVER REPLACEMENT 12 - 18 - 24W



INPUT:
85-265V 50/60HZ
OUTPUT:
36V-65V 300MA±5%
PF≥0.6
IP20

Product code	Packing pcs	Price
RDPQ12	1	€ 9,50
RDPQ18	1	€ 9,50
RDPQ24	1	€ 12,00

SUITABLE FOR: PT E PQ DA 12W E 18W, PQP E PTP 18W

DRIVER REPLACEMENT 24W



INPUT:
100-240V 50/60HZ
OUTPUT:
30V-40VDC 600MA±5%
PF≥0.5
IP20

Product code	Packing pcs	Price
RDPQA24	1	€ 13,90

SUITABLE FOR: PQA 24W

DRIVER REPLACEMENT 40W



INPUT:
220-240V 50/60HZ
200MA
OUTPUT:
27V-42VDC
1000MA±5%
PF≥0.90
IP20

Product code	Packing pcs	Price
RDPQA40	1	€ 18,00

SUITABLE FOR: KIT-PQA 40W

DRIVER REPLACEMENT 42W



INPUT:
100-240V 50/60HZ
OUTPUT:
30V-40VDC
950MA±5%
PF≥0.95
IP20

Product code	Packing pcs	Price
RDPQA42	1	€ 26,00
NEW RDPQA42AGT	1	€ 11,90
NEW RDPQAB42AGT	1	€ 11,90

SUITABLE FOR: PQA 42W, PQA 80W (2 driver)

Compatible with PQAB-426040

DIMMABLE DRIVER 42W 1-10V

INPUT:
100-240V 50/60HZ MAX 0.6A
OUTPUT:
27-42V P RATED 39.9W U
OUT:55V - I RATED 950MA
(CC)
DIMMING RANGE: 10%-100%
PF≥0.90
IP20



Product code	Packing pcs	Price
DRIMPQ42	1	€ 36,00

SUITABLE FOR: PQ 42U, PQA 42W, PQAN 40W, PL40W, PQA 80W (2 driver)

DIMMABLE DRIVER 42W TRAILING EDGE

INPUT:
170-265V 50/60HZ
MAX 0.2A
OUTPUT:
30V-44V 1050MA±5%
DIMMING RANGE:
10%-100%
PF≥0.90
IP20



Product code	Packing pcs	Price
DRIMPQ40	1	€ 36,00

SUITABLE FOR: PQ 42U, PQA 42W, PQAN 40W, PL 40W

EMERGENCY KIT 2 HOURS**ADVANTAGES**

- Can be used on any LED device with separate DRIVER
- Operating voltages must be included from a minimum of 12V to a maximum of 80V and the overall current should not exceed 1200 mA

INPUT: 110-240VAC 50/60Hz
OUTPUT: 12-80V 50mA
EMERGENCY: max 3W
BATTERY: Ni-CD 7.2V/1000mAh
CHARGING TIME: 24 h
BATTERY LIFE: 2 h
TA: 50°C max
TC: 75°C
INCLUDING: LED indicator and Test Switch
WEIGHT: 235 gr

Compatible with:

FUTURA ADVANCE
FTA from 8W to 32W

P- QUADRO ELEGANCE
PQEL 36W and 60W

P-QUADRO E P-TONDO
PT and PQ from 12 to 24W
PQP and PTP 18W and 24W
(electronic and non-mechanical compatibility)

P-LINE 40
PL 40W

P-QUADRO 42U
P-QUADRO ADVANCE
PQA 24W, 42W and 80W
KIT-PQA 40W
PQAN 40W

Product code	Packing pcs	Price
KIT-EMG2	1	€ 45,60



Ok flammable surfaces

EMERGENCY KIT 3 HOURS**ADVANTAGES**

- Can be used on any LED device with separate DRIVER
- Operating voltages must be included from a minimum of 12V to a maximum of 60V and the overall current should not be greater than 1500 mA

INPUT: 85-265V 50/60Hz
OUTPUT: 12-60V 100mAh
EMERGENCY: 3-5W
BATTERY: Ni-CD 6V/3000mAh
CHARGING TIME: 24 h
BATTERY LIFE: 3 h
INCLUDING: LED indicator and Test Switch
WEIGHT: 500 gr

Compatible with:

FUTURA ADVANCE
FTA from 8W to 32W

P- QUADRO ELEGANCE
PQEL 36W and 60W

P-QUADRO E P-TONDO
PT e PQ from 12 to 24W
PQP and PTP 18W and 24W
(electronic and non-mechanical compatibility)

P-LINE 40
PL 40W

P-QUADRO 42U
P-QUADRO ADVANCE
PQA 24W, 42W and 80W
KIT-PQA 40W
PQAN 40W

Product code	Packing pcs	Price
KIT-EMG	1	€ 69,60



Ok flammable surfaces

DAYLIGHT SENSOR



BRIGHTNESS SENSOR 1-10V

Compatible with: all products
1-10V and DRIMPQ42

Product code	Packing pcs	Price
SENSDL1-10	1/100	€ 59,00



Ok flammable
surfaces



Degree of
protection

ADVANTAGES

- 360-degree detection area and a 1-100% adjustment range
- Sensor that integrates daylight. After adjusting the desired light level, the sensor mixes natural and artificial light to always keep the same amount of light inside the room, thus saving energy.
- This twilight sensor is compatible with lighting systems equipped with 1-10V adjustable drivers.
- **The dimming system 1-10**, allows you to vary the amount of light emitted by a source by varying the voltage in the range from 1 to 10V (e.g. 1V minimum brightness, 5V 50%, 10V 100%). It can be controlled with any device that implements this voltage change.

DIMMABLE DRIVER
42W DALI

DALI PROTOCOL complies
with IEC62386-101, 102, 207

INPUT:

100-240V 50/60Hz Max 0.6A

OUTPUT:

27-42V P rated 39.9W U

out:55V - I rated

950mA (CC)

DIMMING RANGE: 10%-100%

PF≥0.90

Product code	Packing pcs	Price
DRIMPQ42D	1/100	€ 59,00



Degree of
protection

ADVANTAGES

- The Digital Addressable Lighting Interface (DALI) is a standard that provides greater functionality and ease of use.
- In a DALI system, electronic power supplies can be directed both to groups and individually; you can set up to 16 groups and up to 16 lighting scenarios freely
- It eliminates the gap between conventional 1-10V systems and overly complex bus systems
- Switching and dimming are handled by the control line. You don't need a kidney. Important information as the status of the lamps are stored in the power supply and remain available to the controller.

CLIP KIT

Fixing KIT
Weight 80 gr



Product code	Packing pcs	Price
KIT-CLIP	1/100	€ 9,50

SUITABLE FOR: PQU 42W, PQA 24W e 42W

SUSPENSION KIT

Composed of 100 cm cables and
stainless steel screws.
WEIGHT 62 gr



Product code	Packing pcs	Price
KIT-PQ40	1/100	€ 8,60
KIT-PQE	1/100	€ 13,20
KIT-PLINE	1/100	€ 6,90

SUITABLE FOR:
PQU 42W, PQA 24W e 42W,
PQA 80W

* SUITABLE FOR: PQEL136W,
PQEL2 36W, PQEL4 60W

**Only suitable for:
PL-406040 40W

CEILING KIT 60X60

Aluminium frame with white finish, ideal for turning LED panels into ceiling lights.

Dimensions 602 x 602 x 43 mm
Weight 477 gr

EASY AND QUICK INSTALLATION

Product code	Packing pcs	Price
KIT-PLF	1/24	€ 23,90

SUITABLE FOR: PQU 42W, PQA 42W

CEILING KIT 60X60

Aluminium frame with white finish, ideal for turning LED panels into ceiling lights.

Dimensions 600 x 600 x 80 mm
Weight 810 gr

EASY AND QUICK INSTALLATION

Product code	Packing pcs	Price
NEW KIT-PLFB	1/20	€ 25,90

SUITABLE FOR: PQAB 42W

CEILING KIT 30X120

Aluminium frame with white finish, ideal for turning LED panels into ceiling lights.

Dimensions 1202 x 302 x 43 mm
Weight 650 gr

EASY AND QUICK INSTALLATION

Product code	Packing pcs	Price
KIT-PLF120	1/12	€ 25,90

SUITABLE FOR: PQA 42W

CEILING KIT 60X120

Aluminium frame with white finish, ideal for turning LED panels into ceiling lights.

Dimensions 1202 x 602 x 43 mm
Weight 730 gr

EASY AND QUICK INSTALLATION

Product code	Packing pcs	Price
NEW KIT-PLF12060	1/12	€ 27,90

RECESSED LIGHT

Light sources become a design and architectural element. They do not impose themselves but disappear into minimal and contemporary architectural structures. Design light to design space.






EMERGENCY AND COURTESY · DOWNLIGHTS · SUPPORTS



Comfort also means safety. Modern light fixtures ready to activate autonomously in case of sudden lack of electricity, to make everyday life easier and safer.

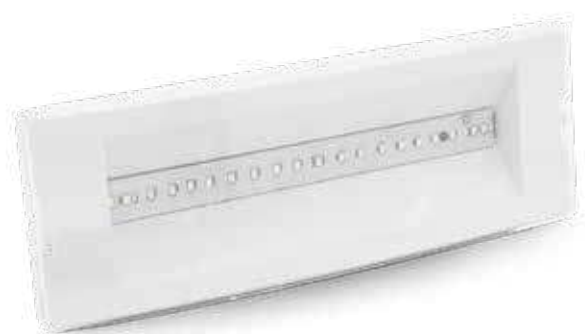

RECESSED LIGHT

EMERGENCY AND COURTESY

CORTÈS · SICURA LED

RECESSED LIGHT - EMERGENCY AND COURTESY CORTÈS

2 YEARS
WARRANTY

suitable for
box 503

suitable for
box 506



CRT3
IP65 **CRT3-014000**
COURTESY LIGHT
IP20 **CRT3E-010340**
EMERGENCY LIGHT



CRT6
IP65 **CRT6-054000**
COURTESY LIGHT
IP65 **CRT6E-050340**
EMERGENCY LIGHT

ADVANTAGES

Recessed step light. Available the version with emergency system that turns on in the absence of electricity.

Characteristics

RA	30.000	on off	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Insulation class
			Ok flammable surfaces

APPLICATIONS

Stair light, ideal for corridors and businesses.

Product code	Watt	Emergency System	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHxW mm	Peso gr	Packing pcs	Price
CRT3-014000	1W	NO	70Lm	4000K	220-240V/AC 50/60 Hz	110°	12mA	≥0,40	107x68x25	63	1/40	€ 23,00
CRT3E-010340	1W	YES	70Lm	4000K	220-240V/AC 50/60 Hz	110°	25mA	≥0,50	107x68x45	126	1/40	€ 52,00
CRT6-054000	5W	NO	280Lm	4000K	220-240V/AC 50/60 Hz	110°	25mA	≥0,95	181x82x47	192	1/50	€ 52,00
CRT6E-050340	5W	YES	280Lm	4000K	220-240V/AC 50/60 Hz	110°	42mA	≥0,50	181x80x49	198	1/50	€ 73,00

INCLUDES INTERCHANGEABLE CHROME MASK



RECESSED LIGHT - EMERGENCY AND COURTESY

SICURA LED



EMERGENCY
3H
AUTONOMY

ADVANTAGES

It turns on in the absence of electricity remaining active for 3 hours. Installable on the surface or recessed with the box included. SA mode: lamp on. SE mode: Lamp works only in an emergency.

Characteristics


RA	30.000	on off	-87%		IP40	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Ok flammable surfaces

APPLICATIONS

Emergency lighting for stairs, ideal for corridors and businesses.

Product code	Watt	Emergency System	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHxI mm	Weight gr	Packing pcs	Price
SCL-020340	2W	YES	210Lm	4000K	220-240V/AC 50/60 Hz	120°	40mA	≥0,40	292x101x63	455	1/12	€ 29,00

Technical Design

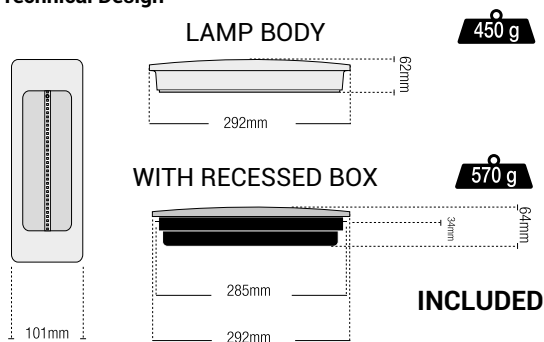

CENTURY



Lighting solutions with a modern design, with fixed or directional optics, that allow you to modulate light in space and distribute it according to your needs. Dimmable versions are also available to adjust the light intensity and optimise their functionality.



RECESSED LIGHT

DOWNLIGHTS

SPOTFIVE · FUTURA LED ·
FUTURA ADVANCE KIT 3 PEZZI

NEW

RECESSED LIGHT - DOWNLIGHTS

SPOTfive


PRO
LINE

2 YEARS
WARRANTY





from 9 to 25W


9W




14W



17W



25W



ADVANTAGES

Downlight LED tricolour: using selector you can select the most suitable light colour for each environment (3000K, 4000K, 6000K). Dimmable with trailing-edge or LED Dimmer systems. Various wattages available: 9 to 25W, all dimmable.

Characteristics

RA

CRI>80

40.000

Lifetime
(hours)



≥20.000
Switches

-50%

Savings



Insulation
class

IP44

Degree of
protection

IK04

Impact
protection



Ok flammable
surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW SPF-091100	9W	18W	800Lm	3000K - 4000K - 6000K	220-240V/AC 50/60 Hz	90°	70mA	≥0,90	113x59	130	10/40	€ 16,50
NEW SPF-141400	14W	28W	1260Lm	3000K - 4000K - 6000K	220-240V/AC 50/60 Hz	90°	100mA	≥0,90	145x66	185	10/40	€ 21,00
NEW SPF-171700	17W	34W	1530Lm	3000K - 4000K - 6000K	220-240V/AC 50/60 Hz	90°	130mA	≥0,90	174x69	252	10/40	€ 25,90
NEW SPF-252400	25W	50W	2450Lm	3000K - 4000K - 6000K	220-240V/AC 50/60 Hz	90°	180mA	≥0,90	244x85	381	10/40	€ 37,90

TRICOLOR

Switchable light
temperature

3000K-4000K-6000K



NEW

RECESSED LIGHT - DOWNLIGHTS SPOTfive



**PRO
LINE**

**2 YEARS
WARRANTY**



UGR<19
UNIFIED GLARE RATING

35W



ADVANTAGES

Downlight LED tricolour: using selector you can select the most suitable light colour for each environment (3000K, 4000K, 6000K). The special mirrored reflector allows you to reach UGR<19.

Characteristics

							
CRI>80	Lifetime (hours)	≥20.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW SPF-351900	35W	70W	3150Lm	3000K - 4000K - 6000K	220-240V/AC 50/60 Hz	60°	169mA	≥0,90	232x113	800	1/10	€ 48,00

TRICOLOR

Switchable light
temperature


3000K-4000K-6000K



RECESSED LIGHT - DOWNLIGHTS

FUTURA LED

PRO
LINE



ADVANTAGES

SUPERSLIM with only 19mm thick, it allows installations in false-ceilings even with minimal space. Orientable head.

Characteristics

RA	25.000	on off	IP20	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Degree of protection	Energetic class

APPLICATIONS

Ideal for offices, home, supermarkets, bar, closet, furniture, bathroom, shop window and shelf.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
FT-066830	6W	50W ALO	450Lm	3000K	220-240V/AC 50/60 Hz	36°	34mA	≥0,50	80x25	80	1/10	€ 8,50
FT-066840	6W	50W ALO	450Lm	4000K	220-240V/AC 50/60 Hz	36°	34mA	≥0,50	80x25	80	1/10	€ 8,50

RECESSED LIGHT - DOWNLIGHTS

FUTURA ADVANCE

3 PCS KIT


PRO
LINE

2 YEARS
WARRANTY

UGR<19
UNIFIED GLARE RATING



KITFTA



ADVANTAGES

Heat-Sink plastic body, with orientable head. Built-in driver, white finish ring.

Characteristics

RA	25.000	on off	-90%		IP20	LED	F
CRI>80	Lifetime (hours)	≥12.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for offices, home, hallway, supermarkets, museums, bars and general lighting.

WHITE FINISH (PREWIRED, READY TO USE)

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
KITFTA-060830	3x6W	3x50W ALO	1350Lm tot.	3000K	220-240V/AC 50/60 Hz	38°	3x52mA	> 0,50	86x59	87	1/10	€ 38,90



RECESSED LIGHT **SUPPORTS**

KLAK · KLIK · CITY FRAME

Practical and functional, spotlights can be placed and oriented easily. They give the ideal touch of light in spaces both in classical and modern style.

RECESSED LIGHT - SUPPORTS


KLAK



KLR



KLS



GU10 lamp holder
included



ADVANTAGES

Die cast aluminium body, adjustable supports with patented plug-in system for rapid installation.

Characteristics



Ok flammable
surfaces

Products available in other colours:




Chrome Silver

APPLICATIONS

Ideal for home environments, museums bars and hotels.

PATENTED CLIP-IN SYSTEM

Product code	Finish	Length mm	Width mm	Diameter mm	Thickness mm	Hole diameter mm	Weight gr	Packing pcs	Price
KLR-AR	SILVER	-	-	90	31	70	78	10/50	€ 6,90
KLR-BI	WHITE	-	-	90	31	70	78	10/50	€ 6,90
KLR-CR	CHROME	-	-	90	31	70	75	10/50	€ 7,90
KLS-AR	SILVER	90	90	-	31	70	87	10/50	€ 6,90
KLS-BI	WHITE	90	90	-	31	70	87	10/50	€ 6,90
KLS-CR	CHROME	90	90	-	31	70	87	10/50	€ 7,90

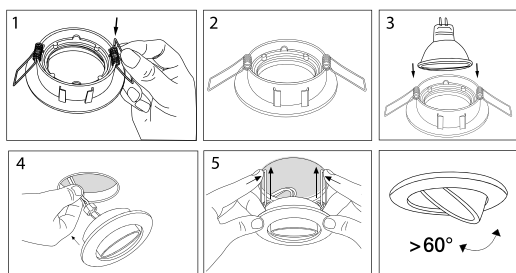

NEW

RECESSED LIGHT - SUPPORTS

KLIK

2 YEARS
WARRANTY



KLIRL



KLIRM



KLIRS

ADVANTAGES

Body in ABS. What makes these recessed orientable spotlights unique is the simplicity in installation and the depth of the range. Circular design that integrates well into any type of environment.

Characteristics



IP20

Degree of protection

F

Ok flammable surfaces

CLIP-IN SYSTEM



APPLICATIONS

Ideal for home environments, museums bars and hotels.

Product code	Shape	Effect	Spotlight	Dimensions mm	Weight gr	Packing pcs	Price
NEW KLIRL	Round	Deep	1x ø 50mm	ø 90x25	51	10 / 50	€ 2,90
NEW KLIRM	Round	Spiral	1x ø 50mm	ø 90x25	37	10 / 50	€ 2,50
NEW KLIRS	Round	Flat	1x ø 50mm	ø 90x25	39	10 / 50	€ 2,50

ACCESSORY

Product code	Packing pcs	Price
NEW PLGU10	10/1000	€ 0,95
NEW PLGU53	10/1000	€ 0,95



PLGU10 GU10



PLGU53 GU5.3

Lamp holders

NEW

RECESSED LIGHT - SUPPORTS

KLIK



KLISL



KLISM




KLISS

ADVANTAGES

Body in ABS. What makes these recessed orientable spotlights unique is the simplicity in installation and the depth of the range. A square-shaped design that integrates well into any type of environment.

Characteristics



Degree of protection Ok flammable surfaces

CLIP-IN SYSTEM



APPLICATIONS

Ideal for home environments, museums bars and hotels.

Product code	Shape	Effect	Spotlight	Dimensions mm	Weight gr	Packing pcs	Price
NEW KLISL	Square	Deep	1x ø 50mm	93x93x25	59	10 / 50	€ 3,40
NEW KLISM	Square	Spiral	1x ø 50mm	93x93x25	48	10 / 50	€ 2,90
NEW KLISS	Square	Flat	1x ø 50mm	93x93x25	46	10 / 50	€ 2,90

ACCESSORY

Product code	Packing pcs	Price
NEW PLGU10	10/1000	€ 0,95
NEW PLGU53	10/1000	€ 0,95



PLGU10 GU10 PLGU53 GU5.3

Lamp holders

NEW

RECESSED LIGHT - SUPPORTS KLIK

2 YEARS
WARRANTY



KLISL2

KLISM2

KLISS2

ADVANTAGES

Body in ABS. What makes these recessed orientable spotlights unique is the simplicity in installation and the depth of the range. Double light source with an elegant style.

Characteristics



Degree of
protection

Ok flammable
surfaces

CLIP-IN SYSTEM



APPLICATIONS

Ideal for home environments, museums bars and hotels.

Product code	Shape	Effect	Spotlight	Dimensions mm	Weight gr	Packing pcs	Price
NEW KLISL2	Rectangular	Deep	2x ø 50mm	173x93x25	114	10 / 50	€ 5,90
NEW KLISM2	Rectangular	Spiral	2x ø 50mm	173x93x25	92	10 / 50	€ 5,50
NEW KLISS2	Rectangular	Flat	2x ø 50mm	173x93x25	90	10 / 50	€ 5,50

ACCESSORY

Product code	Packing pcs	Price
NEW PLGU10	10/1000	€ 0,95
NEW PLGU53	10/1000	€ 0,95



PLGU10 GU10 PLGU53 GU5.3

Lamp holders

NEW

RECESSED LIGHT - SUPPORTS

KLIK



KLIRXL

KLIRXLD

KLISXL

KLISXLD


ADVANTAGES

Body in ABS. What makes these recessed orientable spotlights unique is the simplicity in installation and the depth of the range. The conical shape integrates well into any type of environment.

APPLICATIONS

Ideal for home environments, museums bars and hotels.

Characteristics



CLIP-IN SYSTEM

KLIRXL - KLIRXLD



KLISXL - KLISXLD



Product code	Shape	Effect	Spotlight	Dimensions mm	Weight gr	Packing pcs	Price
NEW KLIRXL	Round	Hidden	1x ø 50mm	ø 93x51	72	10 / 50	€ 4,90
NEW KLIRXLD	Round	Hidden and asymmetrical	1x ø 50mm	ø 93x64	72	10 / 50	€ 4,90
NEW KLISXL	Square	Hidden	1x ø 50mm	93x93x51	74	10 / 50	€ 4,90
NEW KLISXLD	Square	Hidden and asymmetrical	1x ø 50mm	93x93x64	74	10 / 50	€ 4,90

ACCESSORY

Product code	Packing pcs	Price
NEW PLGU10	10/1000	€ 0,95
NEW PLGU53	10/1000	€ 0,95



PLGU10 GU10 PLGU53 GU5.3


Lamp holders

CITY FRAME


ADJUSTABLE RECESSED SUPPORTS FOR AR111 LAMPS



Mod. **CF1P-AR111**
One lamp - Hole 160 x 160 mm




Mod. **CF2P-AR111**
Two lamps - Hole 345 x 160 mm



Mod. **CF3P-AR111**
Three lamps - Hole 475 x 160 mm

ASSEMBLY

- Remove the additional black steel spring positioned on the knurled guide hole (Fig1)
- Move the lamp housings so as to create the space required for insertion and disconnection of any additional spring
- Make the long part of the spring adhere to the body of the Frame (Fig2)
- Push the Frame up to the self-locking (Fig3)

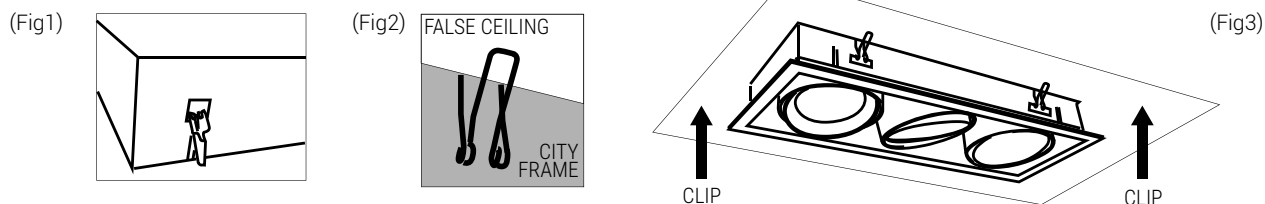

RECESSED LIGHT - SUPPORTS

CITY FRAME



CF1P

CF2P

CF3P

ADVANTAGES

Steel structure and aluminium frame with 30 degrees orientable optic group on two axes. Quick docking system to the ceiling.

Characteristics



Degree of protection Ok flammable surfaces

APPLICATIONS


Applications in false-ceiling of exhibition spaces, shops and offices.

Product code	Finish	Length mm	Width mm	Height mm	Hole diameter mm	Weight gr	Packing pcs	Price
CF1P-AR111	Silver/Black	192	192	152	-	730	1/16	€ 26,00
CF2P-AR111	Silver/Black	370	192	152	-	1320	1/8	€ 42,00
CF3P-AR111	Silver/Black	502	192	152	-	1750	1/8	€ 67,00

Lampade (Optional):

CITY LAMP
SUPERLED
CAMETA

Cod. AR111 15W 230Volt Pag. 110
Cod. AR111 12W 12Volt Pag. 110
Cod. AR111 15W 230Volt Pag. 233





PLASTER

The innovative and elegant aesthetic makes the plaster and resin elements perfect for an installation on walls and ceilings. The result is a hidden effect that enhance with style and elegance every kind of environment.





JESSY · DALI310 · MIRO200 · KONI70 · JESSY BOLLE · ECLISSE · SOFFIO

PLASTER JESSY AR111



ADVANTAGES

Recessed plaster supports suitable to be installed in any plasterboard ceiling or wall in a totally invisible way. Lamp NOT INCLUDED.

Characteristics



Insulation
class

IP20

Degree of
protection




**Material
Chalk**

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, restaurants, accommodation and general lighting.

Product code	Colour	Compatibility	Length mm	Width mm	Height mm	Weight gr	Packing pcs	Price
JESSY-AR111	WHITE	AR111/G53	200	77	200	1700	1/6	€ 31,00



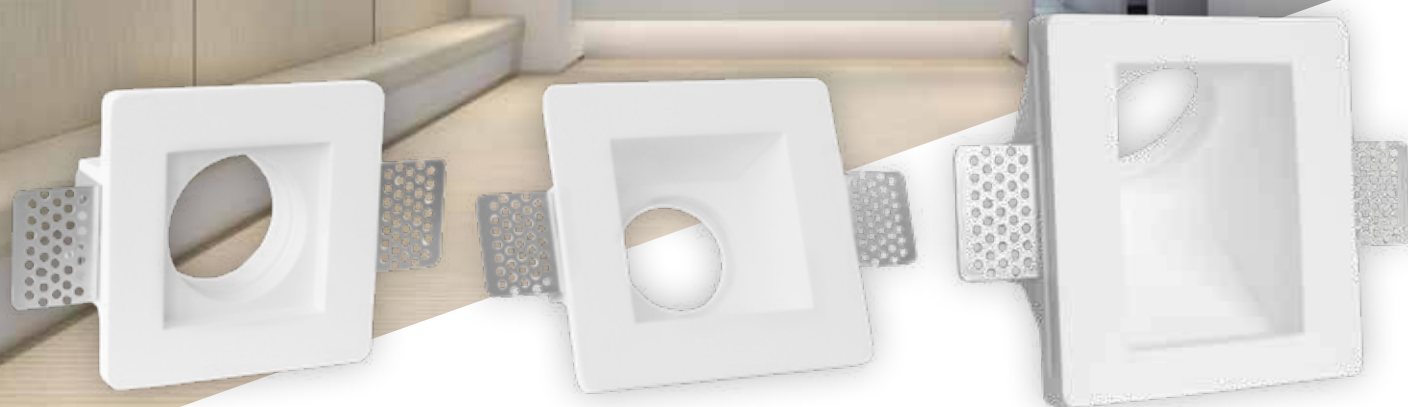

JESSY
SQ100

JESSY
SQ120

JESSY
SQ45GR

45 degree tilt
angle

ADVANTAGES

Recessed plaster supports suitable to be installed in any plasterboard ceiling or wall in a totally invisible way. Lamp NOT INCLUDED.

Characteristics



Insulation
class



Degree of
protection



Material
Chalk

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, restaurants, accommodation and general lighting.

Product code	Colour	Compatibility	Length mm	Width mm	Height mm	Weight gr	Packing pcs	Price
JESSY-SQ100	WHITE	GU10	100	30	100	300	1/24	€ 8,50
JESSY-SQ120	WHITE	GU10	120	65	120	470	1/24	€ 10,90
JESSY-SQ45GR	WHITE	GU10	120	65	120	550	1/24	€ 10,90



GU10 lamp holder
included



PLASTER JESSY



**DOUBLE VERSION:
SUITABLE FOR 2 SPOTLIGHTS**



JESSY
SQ120GLASS



JESSY
SR120



JESSY2
SQ2112

ADVANTAGES

Recessed plaster supports suitable to be installed in any plasterboard ceiling or wall in a totally invisible way. Lamp NOT INCLUDED.

Characteristics



Insulation
class

IP20

Degree of
protection



**Material
Chalk**

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, restaurants, accommodation and general lighting.

Product code	Colour	Compatibility	Length mm	Width mm	Height mm	Weight gr	Packing pcs	Price
JESSY-SQ120GLASS	WHITE	GU10	120	60	120	480	1/24	€ 11,90
JESSY-SR120	WHITE	GU10	120	45	120	540	1/24	€ 10,90
JESSY2-SQ2112	WHITE	GU10	215	60	120	1050	1/12	€ 18,90



**GU10 lamp holder
included**



PLASTER JESSY



**JESSY
RD100**



**JESSY
RD130**

ADVANTAGES

Recessed plaster supports suitable to be installed in any plasterboard ceiling or wall in a totally invisible way. Lamp NOT INCLUDED.

Characteristics



Insulation
class



Degree of
protection



**Material
Chalk**

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, bars and boutiques.

Product code	Colour	Compatibility	Diameter mm	Height mm	Weight gr	Packing pcs	Price
JESSY-RD100	WHITE	GU10	100	30	216	1/24	€ 8,50
JESSY-RD130	WHITE	GU10	130	45	480	1/24	€ 10,90



**GU10 lamp holder
included**



PLASTER

KON170 MIRO200 DALI310



KON170

MIRO200

DALI310 E14

ADVANTAGES

Resined plaster supports that can be painted. Invisible installation effect, flush with the surface. Lamp NOT INCLUDED.

Characteristics



Insulation
class



Degree of
protection



Material
Chalk

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, restaurants, accommodation and general lighting.


Product code	Colour	Compatibility	Length mm	Width mm	Height mm	Weight gr	Packing pcs	Price
KON170	WHITE	GU10	68	68	170	1300	1/8	€ 38,00
MIRO200	WHITE	E14	280	135	200	2400	1/6	€ 56,00
DALI310	WHITE	E14	310	184	250	4380	1/4	€ 99,00



PLASTER JESSY BOLLE



JESSY
150

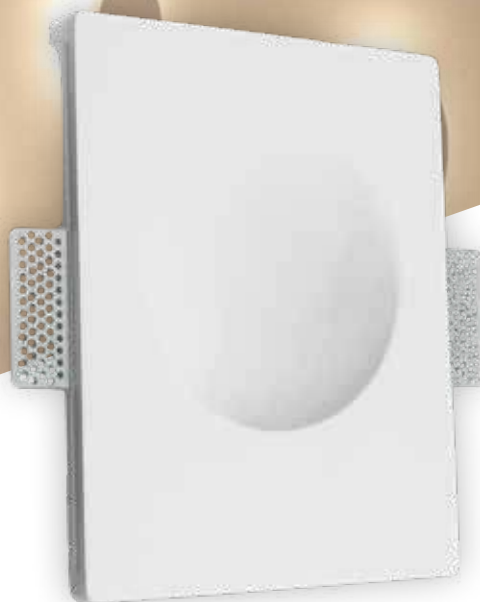

JESSY
250

ADVANTAGES

Plaster recessed support suitable for plasterboard surfaces, rounded shapes and invisible effect. Compatible with GU10 lamp not included.

Characteristics



Insulation
class



Degree of
protection



**Material
Chalk**


APPLICATIONS

Ideal for living rooms, dining rooms, hotels, restaurants, accommodation and general lighting.

Product code	Connection	Length mm	Width mm	Height mm	Weight gr	Packing pcs	Price
JESSY-BOLLE150	GU10	210	78	250	2500	1/4	€ 53,00
JESSY-BOLLE250	GU10	290	78	350	3800	1/3	€ 67,00



PLASTER ECLISSE

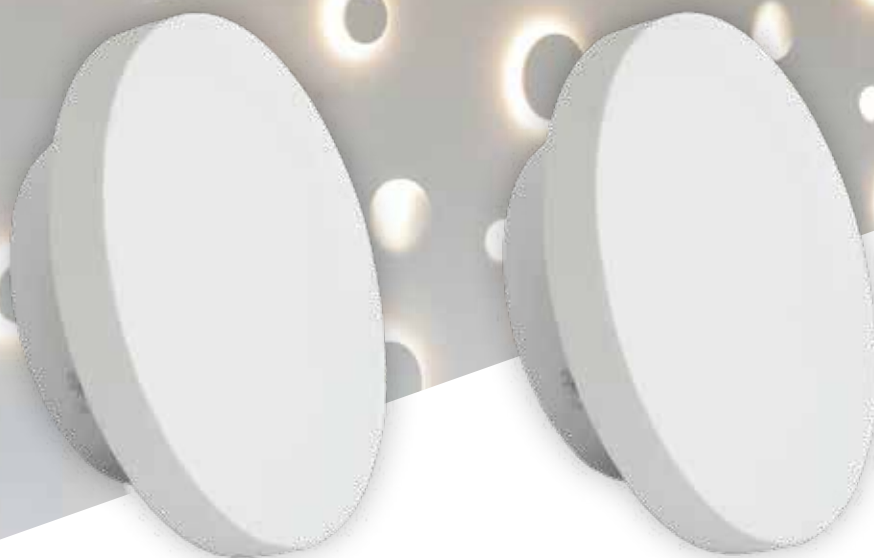

ECLISSE150
Ø150

ECLISSE250
Ø250

ADVANTAGES

Resined plaster applique suitable to be installed on plasterboard surfaces. Decorative light with a simple and modern design. Built-in LED.

Characteristics

RA	30.000	on off	-80%	I	IP20	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, restaurants and general lighting.

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ECLISSE150	WHITE	5W	25W	280Lm	3000K	220-240V/AC 50/60 Hz	40mA	> 0,70	150x46	730	1/16	€ 84,00
ECLISSE250	WHITE	9W	30W	320Lm	3000K	220-240V/AC 50/60 Hz	70mA	> 0,70	250x46	1970	1/8	€ 149,00



Diffused light to make the environment bright and comfortable



Material
Chalk

PLASTER SOFFIO



SOFFIO180

SOFFIO230

SOFFIO320

ADVANTAGES

Plaster recessed step light, with built-in warm LED light. Decorative lighting with an elegant and modern design.

Characteristics

RA	30.000	on off		IP20	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for living rooms, dining rooms, hotels, restaurants and impressive lighting.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
SOFFIO180	1W	-	70Lm	3000K	220-240V/AC 50/60 Hz	40°	40mA	> 0,45	120x55x180	910	1/24	€ 62,00
SOFFIO230	1W	-	70Lm	3000K	220-240V/AC 50/60 Hz	40°	40mA	> 0,45	145x55x230	1300	1/12	€ 65,00
SOFFIO320	1W	-	70Lm	3000K	220-240V/AC 50/60 Hz	40°	40mA	> 0,45	100x40x320	1300	1/12	€ 65,00

SOFFIO 180



SOFFIO 230



SOFFIO 320



Example of stair lighting



Material
Chalk




A bright light to welcome, a high quality lighting to give the right emphasis to environments, objects and people. Homes, restaurants, shops and hospitality areas need light performance with high colour rendering and extraordinary visual comfort.



SHOP 95

PAR SHOP · CAMETA · FUTURA SHOP 95 · VENUS SHOP · REGIA SHOP

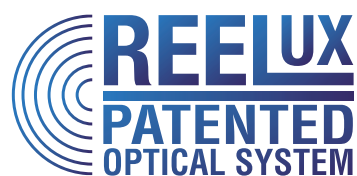

SHOP 95


The greatest brilliance ever expressed by LED

PRO
LINE



CRI enhances the real colours of the objects.

This value ranges from 0 to 100, if CRI >50 there is a poor colour rendering, if it is >80 you have a good colour rendering even if the colours are not perfectly real. For certain uses, such as store lighting, the current regulations require CRI >80. **SHOP95** products stand out from the standards for the high quality of light performance thanks to **CRI >95** that guarantees the maximum colour rendering.

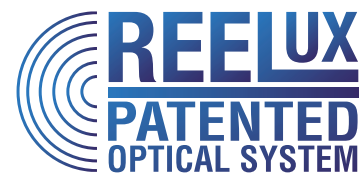

REELUX patented optical system

Every lighting fixture should provide the right amount of light, while the optics have to improve the **QUALITY** and **DISTRIBUTION** of the light output. For this purpose Century has developed the extraordinary **REELUX** optical system.

SHOP 95

PAR SHOP

SHOP 95

CAMETA

2 YEARS
WARRANTYPRO
LINE95
CRIREELUX
PATENTED
OPTICAL SYSTEM

DIMMABLE

SHPAR20
REFLECTOR E27SHPAR30
REFLECTOR E27SHPAR38
REFLECTOR E27

CM

ADVANTAGES

The Colour Rendering Index (CRI) measures how natural the colours of objects appear. This value varies from 0 to 100. Index of 95-100% indicates maximum brilliance and colour rendering. Special patented REELUX optics. Dimmable with trailing-edge or LED Dimmer systems.

Characteristics

RA	40.000	on off	-89%	IP20	A+	F
CRI>95	Lifetime (hours)	≥20.000 Switches	Savings	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.

Product code	Con- nection	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
SHPAR20-082730	E27	8W	75W	640Lm	3000K	195-265V/AC 50/60 Hz	38°	40mA	> 0,95	63x93	157	6/24	€ 36,00
SHPAR20-082740	E27	8W	75W	656Lm	4000K	195-265V/AC 50/60 Hz	38°	40mA	> 0,95	63x93	157	6/24	€ 36,00
SHPAR30-152740	E27	15W	100W	1230Lm	4000K	195-265V/AC 50/60 Hz	38°	72mA	> 0,95	95x119	302	6/24	€ 57,00
SHPAR38-182730	E27	18W	120W	1430Lm	3000K	195-265V/AC 50/60 Hz	38°	76mA	> 0,95	122x128	360	6/24	€ 67,00
SHPAR38-182740	E27	18W	120W	1462Lm	4000K	195-265V/AC 50/60 Hz	38°	76mA	> 0,95	122x128	360	6/24	€ 67,00
CM-151130	-	15W	100W	1230Lm	3000K	220-240V/AC 50/60 Hz	38°	70mA	> 0,95	111x49	205	6/24	€ 62,00

NEW

SHOP 95

FUTURA SHOP 95





FTS
30W

FTS
60W

30W



60W



ADVANTAGES

Downlights made of high-power dissipating die cast aluminium with CRI95 LED chips for a perfect colour rendering. Suitable for prolonged use. Driver included.

Characteristics



CRI > 95

Lifetime
(hours)≥ 25.000
Switches

Savings

Insulation
classDegree of
protectionEnergetic
classOk flammable
surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.



Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW FTS-301340	30W	50W CDM	2530Lm	4000K	220-240V/AC 50/60 Hz	36°	132mA	> 0,95	115x138x100	530	3/30	€ 57,00
NEW FTS-602340	60W	70W CDM	5260Lm	4000K	220-240V/AC 50/60 Hz	60°	254mA	> 0,95	195x230x140	1790	3/9	€ 109,00

SHOP 95


PRO
LINE

FUTURA SHOP 95


Dimmable




FUTURA SHOP 22W



FUTURA SHOP 39W



FUTURA SHOP 28W



FUTURA SHOP 50W

ADVANTAGES

The Colour Rendering Index (CRI) measures how natural the colours of objects appear. This value varies from 0 to 100. Index of 95-100% indicates maximum brilliance and colour rendering. Special patented REELUX optics. Dimmable with trailing-edge or LED Dimmer systems. Energy savings of 44%.

Characteristics

RA	50.000	on off	-44%	IP20	LED	F
CRI>95	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class
						Ok flammable surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
FTSD-221730	22W	2x26W CFL	1825Lm	3000K	220-240V/AC 50/60 Hz	60°	90mA	≥0,95	170x114	534	2/8	€ 108,00
FTSD-221740	22W	2x26W CFL	2030Lm	4000K	220-240V/AC 50/60 Hz	60°	90mA	≥0,95	170x114	534	2/8	€ 108,00
FTSD-282330	28W	50W CDM	2320Lm	3000K	220-240V/AC 50/60 Hz	90°	150mA	≥0,95	230x125	920	2/8	€ 132,00
FTSD-282340	28W	50W CDM	2525Lm	4000K	220-240V/AC 50/60 Hz	90°	150mA	≥0,95	230x125	920	2/8	€ 132,00
FTSD-392330	39W	70W CDM	3257Lm	3000K	220-240V/AC 50/60 Hz	90°	170mA	≥0,95	230x135	1100	2/8	€ 156,00
FTSD-501730	50W	100W CDM	4340Lm	3000K	220-240V/AC 50/60 Hz	90°	270mA	≥0,95	170x106	920	2/8	€ 165,00
FTSD-501740	50W	100W CDM	4680Lm	4000K	220-240V/AC 50/60 Hz	90°	270mA	≥0,95	170x106	920	2/8	€ 165,00

SHOP 95

VENUS SHOP

SHOP 95

REGIA
SHOP2 YEARS
WARRANTYPRO
LINE95
CRIREELUX
PATENTED
OPTICAL SYSTEM

DIMMABLE



VS

RGOD



VENUS SHOP 8,5W



REGIA SHOP 8W



REGIA SHOP 25W/36W

ADVANTAGES

The Colour Rendering Index (CRI) measures how natural the colours of objects appear. This value varies from 0 to 100. Index of 95-100% indicates maximum brilliance and colour rendering. Special patented REELUX optics. Dimmable with trailing-edge or LED Dimmer systems. Energy savings of 89%.

Characteristics




RA	50.000	on off	-89%		IP20	LED	F
CRI>95	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
VS-853830	8,5W	75W ALO	714Lm	3000K	220-240V/AC 50/60 Hz	38°	39mA	≥0,95	90x63	142	10/40	€ 36,00
VS-853840	8,5W	75W ALO	742Lm	4000K	220-240V/AC 50/60 Hz	38°	39mA	≥0,95	90x63	142	10/40	€ 36,00
RGOD-089030	8W	75W ALO	710Lm	3000K	220-240V/AC 50/60 Hz	38°	37mA	≥0,95	110x54	200	6/24	€ 53,00
RGOD-089040	8W	75W ALO	730Lm	4000K	220-240V/AC 50/60 Hz	38°	37mA	≥0,95	110x54	200	6/24	€ 53,00
RGOD-259030	25W	50W CDM	2150Lm	3000K	220-240V/AC 50/60 Hz	38°	130mA	≥0,95	190x156	1070	6/24	€ 132,00
RGOD-259040	25W	50W CDM	2300Lm	4000K	220-240V/AC 50/60 Hz	38°	130mA	≥0,95	190x156	1070	6/24	€ 132,00
RGOD-369030	36W	70W CDM	3020Lm	3000K	220-240V/AC 50/60 Hz	38°	170mA	≥0,95	190x174	1130	6/24	€ 180,00
RGOD-369040	36W	70W CDM	3240Lm	4000K	220-240V/AC 50/60 Hz	38°	170mA	≥0,95	190x174	1130	6/24	€ 180,00

SHOP 95

REGIA SHOP**Dimmable****PRO
LINE****ADVANTAGES**

The Colour Rendering Index (CRI) measures how natural the colours of objects appear. This value varies from 0 to 100. Index of 95-100% indicates maximum brilliance and colour rendering. Special patented REELUX optics. Dimmable with trailing-edge or LED Dimmer systems. Energy savings of 85%.

Characteristics

RA	50.000	on off	-85%	IP20	LED	F
CRI>95	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class
						Ok flammable surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.


Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
FSMD1-150130	15W	100W ALO	1230Lm	3000K	220-240V/AC 50/60 Hz	38°	70mA	≥0,95	200x200x106	760	1/6	€ 132,00
FSMD1-150140	15W	100W ALO	1265Lm	4000K	220-240V/AC 50/60 Hz	38°	70mA	≥0,95	200x200x106	760	1/6	€ 132,00
FSMD2-300230	30W	200W ALO	2460Lm	3000K	220-240V/AC 50/60 Hz	38°	140mA	≥0,95	362x200x106	1518	1/6	€ 216,00
FSMD2-300240	30W	200W ALO	2530Lm	4000K	220-240V/AC 50/60 Hz	38°	140mA	≥0,95	362x200x106	1518	1/6	€ 216,00
FSMD3-450330	45W	300W ALO	3690Lm	3000K	220-240V/AC 50/60 Hz	38°	210mA	≥0,95	523x200x106	2278	1/6	€ 324,00
FSMD3-450340	45W	300W ALO	3795Lm	4000K	220-240V/AC 50/60 Hz	38°	210mA	≥0,95	523x200x106	2278	1/6	€ 324,00

SHOP 95

REGIA SHOP

Dimmable

PRO
LINE



RGTD



RGRD

ADVANTAGES

The Colour Rendering Index (CRI) measures how natural the colours of objects appear. This value varies from 0 to 100. Index of 95-100% indicates maximum brilliance and colour rendering. Special patented REELUX optics. Dimmable with trailing-edge or LED Dimmer systems. Energy savings of 57%.

Characteristics

RA	50.000	on off	-57%		IP20	LED	
CRI>95	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.


Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
RGTD-157040	15W	35W CDM	1380Lm	4000K	220-240V/AC 50/60 Hz	38°	75mA	≥0,95	70x130x166	663	1/6	€ 96,00
RGRD-259040	25W	50W CDM	2300Lm	4000K	220-240V/AC 50/60 Hz	38°	130mA	≥0,95	90x150x196	1050	1/6	€ 141,00
RGTD-259030	25W	50W CDM	2150Lm	3000K	220-240V/AC 50/60 Hz	38°	130mA	≥0,95	90x151x187	1050	1/6	€ 141,00
RGTD-259040	25W	50W CDM	2300Lm	4000K	220-240V/AC 50/60 Hz	38°	130mA	≥0,95	90x151x187	1050	1/6	€ 141,00
RGTD-369030	36W	70W CDM	3020Lm	3000K	220-240V/AC 50/60 Hz	38°	170mA	≥0,95	90x151x185	1040	1/6	€ 180,00
RGTD-369040	36W	70W CDM	3240Lm	4000K	220-240V/AC 50/60 Hz	38°	170mA	≥0,95	90x151x185	1040	1/6	€ 180,00

SHOP 95

PRO
LINE

REGIA SHOP

Dimmable



ADVANTAGES

The Colour Rendering Index (CRI) measures how natural the colours of objects appear. This value varies from 0 to 100. Index of 95-100% indicates maximum brilliance and colour rendering. Special patented REELUX optics. Dimmable with trailing-edge or LED Dimmer systems. Energy savings of 66%.

Characteristics

RA	50.000	on off	-66%		IP20	LED	
CRI>95	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for hotels, bars, restaurants, shops, offices, hallways and general lighting.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
RGSD-128030	12W	35W CDM	1032Lm	3000K	220-240V/AC 50/60 Hz	38°	60mA	≥0,95	166x139x40	508	1/6	€ 99,00
RGSD-128040	12W	35W CDM	1044Lm	4000K	220-240V/AC 50/60 Hz	38°	60mA	≥0,95	166x139x40	508	1/6	€ 99,00
RGSD-251130	25W	50W CDM	2150Lm	3000K	220-240V/AC 50/60 Hz	38°	130mA	≥0,95	213x173x48	1035	1/6	€ 132,00
RGSD-251140	25W	50W CDM	2300Lm	4000K	220-240V/AC 50/60 Hz	38°	130mA	≥0,95	213x173x48	1035	1/6	€ 132,00
RGSD-361130	36W	70W CDM	3020Lm	3000K	220-240V/AC 50/60 Hz	38°	170mA	≥0,95	215x173x48	1035	1/6	€ 156,00
RGSD-361140	36W	70W CDM	3200Lm	4000K	220-240V/AC 50/60 Hz	38°	170mA	≥0,95	215x173x48	1035	1/6	€ 156,00



TRACK LIGHTING

BINARY

Three-phase binary systems designed for museum, retail and hospitality.



Product code	Type	Working voltage	Max. Current	Colour	Dimension	Weight gr	Packing pcs	Price
NEW BNRBI-2000	Three-phase	220-240V/AC	10 A	White	2m	1600	1/10	€ 49,00
NEW BNRNE-2000	Three-phase	220-240V/AC	10 A	Black	2m	1600	1/10	€ 49,00

MOUNTING KIT



Product code	Colour	Packing pcs	Price
NEW ACBNRBI-KIT	White	5/90	€ 6,00
NEW ACBNRNE-KIT	Black	5/90	€ 6,00

NEW

TRACK LIGHTING



TERMINAL CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

NEW ACBNRBI-CNEND 220-240V/AC 10 A **White** 32x32 10/180 € 1,00

NEW ACBNRNE-CNEND 220-240V/AC 10 A **Black** 32x32 10/180 € 1,00

FLEXIBLE CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

ACBNRBI-CNFLEX 220-240V/AC 10 A **White** 32x240 10/40 € 18,00

ACBNRNE-CNFLEX 220-240V/AC 10 A **Black** 32x240 10/40 € 18,00

INTERNAL CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

NEW ACBNRBI-CNINT 220-240V/AC 10 A **White** 25x68 10/180 € 6,00

NEW ACBNRNE-CNINT 220-240V/AC 10 A **Black** 25x68 10/180 € 6,00

L-SHAPED CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

ACBNRBI-CNL 220-240V/AC 10 A **White** 99x32 10/180 € 11,00

ACBNRNE-CNL 220-240V/AC 10 A **Black** 99x32 10/180 € 11,00

LINEAR CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

NEW ACBNRBI-CNLIN 220-240V/AC 10 A **White** 166x32 20/80 € 11,00

NEW ACBNRNE-CNLIN 220-240V/AC 10 A **Black** 166x32 20/80 € 11,00

HEAD CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

ACBNRBI-CNLIVE 220-240V/AC 10 A **White** 32x98 5/90 € 6,00

ACBNRNE-CNLIVE 220-240V/AC 10 A **Black** 32x98 5/90 € 6,00

T-SHAPED CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

NEW ACBNRBI-CNT 220-240V/AC 10 A **White** 99x166 10/180 € 16,50

NEW ACBNRNE-CNT 220-240V/AC 10 A **Black** 99x166 10/180 € 16,50

X-SHAPED CONNECTOR



Product code	Working voltage	Max. Current	Colour	Dimensions	Packing pcs	Price
--------------	-----------------	--------------	--------	------------	-------------	-------

ACBNRBI-CNX 220-240V/AC 10 A **White** 166x166 10/180 € 21,00

ACBNRNE-CNX 220-240V/AC 10 A **Black** 166x166 10/180 € 21,00



CENTURY


ENERGY SAVINGS UP TO
90%

SENSORS


Lighting becomes intelligent with motion sensors. Installed on the wall or ceiling, the light turns on autonomously only when necessary. They activate with a movement and then switch off on their own: the ideal solution for parking lots, bathrooms, terraces, corridors, condominiums.




SENSORS SENSORS




SENS1




SENS2



SENS3



SENS4



SENS5

ADVANTAGES

Orientable PIR presence detectors, wall or ceiling mounting, with motion sensor that allows light to activate when motion is detected. They turn off themselves. Detection distance: 6m (SENS5) and 12m (SENS1-4). Installation height: 1.8 - 2.5m (SENS1-3) and 2.2 - 4m (SENS4-5).

Characteristics



Insulation class



APPLICATIONS

Great solution for offices, schools, warehouses, public bathrooms, parking lots, gardens, terraces and corridors.

Product code	Type	Power	Maximum Power	Min. power-on time	Max. power-on time	Dimensions LxHx mm	Weight gr	Packing pcs	Price
SENS1-18044	PIR wall sensor	220-240V/AC	400W LED and 800W TRAD	10 sec. ±3 sec.	15 min. ±2 min.	80x67x56	94	1/30	€ 16,90
SENS2-18044	PIR wall sensor	220-240V/AC	300W LED and 1200W TRAD	10 sec. ±3 sec.	7 min. ±2 min.	85x95x80	136	1/30	€ 14,50
SENS3-36044	PIR wall sensor	220-240V/AC	300W LED and 1200W TRAD	10 sec. ±3 sec.	15 min. ±2 min.	119x89x60	187	1/30	€ 25,90
SENS4-36020	PIR ceiling sensor	220-240V/AC	300W LED and 1200W TRAD	10 sec. ±3 sec.	15 min. ±2 min.	88.5x55	103	1/30	€ 25,90
SENS5-36020	PIR recessed sensor	220-240V/AC	300W LED and 1200W TRAD	10 sec. ±3 sec.	15 min. ±2 min.	76x78	95	1/30	€ 24,90

DECORATIVE LED

Modern lines, elegance and simplicity. Different functions, combined with a unique design. Thanks to diffused and well-distributed light, the desired atmosphere in every environment can be created.






SUSPENSION · CEILING · DESIGN



Halfway between art and design, light takes centre stage. Modern, iconic and vintage shapes give personality to the environments in a perfect synthesis of beauty and functionality.

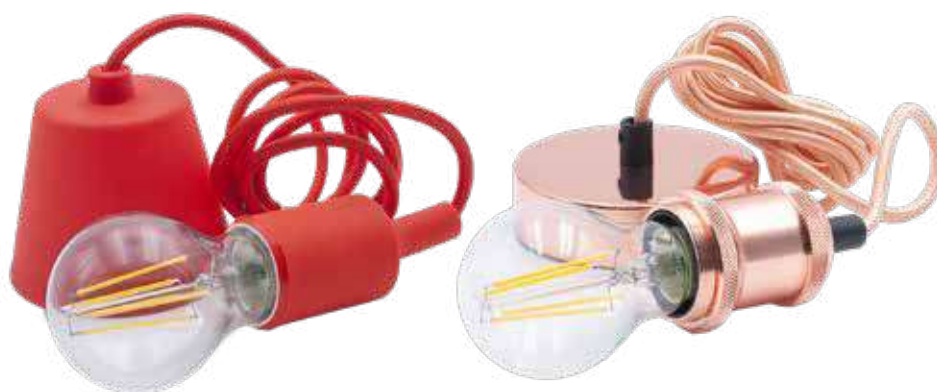

DECORATIVE LED

SUSPENSION

FANTASY · FUSION 150 · COLORFULL · PER8

DECORATIVE LED - SUSPENSION FANTASY

2 YEARS
WARRANTY



ADVANTAGES

Silicone lamp holder with the possibility of various assembly combinations. 150cm long cable. For E27 bulbs. Bulb not included. Several finishes available.

Characteristics



Insulation
class

IP20

Degree of
protection

APPLICATIONS

Decorative applications, ideal for youth environments and generic lighting.

150 cm long cable

Product code	Colour	Con- nection	Volt/Hertz	Cable length mm	Packing pcs	Price
FTAR-150	ORANGE	E27	220-240V/AC 50/60 Hz	1500	10/50	€ 5,90
FTBI-150	WHITE	E27	220-240V/AC 50/60 Hz	1500	10/50	€ 5,90
FTGR-150	GREY	E27	220-240V/AC 50/60 Hz	1500	10/50	€ 5,90
FTNE-150	BLACK	E27	220-240V/AC 50/60 Hz	1500	10/50	€ 5,90
FTRO-150	RED	E27	220-240V/AC 50/60 Hz	1500	10/50	€ 5,90
FTTU-150	TURQUOISE	E27	220-240V/AC 50/60 Hz	1500	10/50	€ 5,90
FTVE-150	GREEN	E27	220-240V/AC 50/60 Hz	1500	10/50	€ 5,90

Different colours available:



Red



Orange



White



Black



Grey



Turquoise



Green

DECORATIVE LED - SUSPENSION FUSION 150



ADVANTAGES

Aluminium lamp holder with the possibility of various assembly combinations. 150cm long cable. For E27 bulbs. Bulb not included. Several finishes available.

Characteristics



Insulation
class

IP20

Degree of
protection

APPLICATIONS

Great solution for restaurants, pubs, interiors with vintage design.

150 cm long cable

Product code	Colour	Con- nection	Volt/Hertz	Cable length mm	Packing pcs	Price
FSBR-150	BRONZE	E27	220-240V/AC 50/60 Hz	1500	6/24	€ 15,90
FSNE-150	BLACK	E27	220-240V/AC 50/60 Hz	1500	6/24	€ 15,90
FSRG-150	ROSE GOLD	E27	220-240V/AC 50/60 Hz	1500	6/24	€ 15,90
FSRGV-150	VINTAGE ROSE GOLD	E27	220-240V/AC 50/60 Hz	1500	6/24	€ 15,90

Different colour available:



FSBR
BRONZE

FSNE
BLACK

FSRG
ROSE
GOLD

FSRGV
VINTAGE
ROSE
GOLD


DECORATIVE LED - SUSPENSION COLORFULL

2 YEARS
WARRANTY

**PRO
LINE**

Includes canopy for
ceiling mounting

Different colours available



ADVANTAGES

Painted aluminium body and shiny semi-transparent plastic reflector. Mounting accessories and 70 cm cable included. Available in 4 colour finishes: white, red, orange and green.

Characteristics

RA	30.000	on off	-83%	I	IP65	LED
CRI>80	Lifetime (hours)	≥20.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for living rooms, bedrooms, dining rooms, kitchens.

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
CFAR-102030	ORANGE	10W	60W	850Lm	3000K	220-240V/AC 50/60 Hz	60°	50mA	≥0,90	203x174	605	1/8	€ 39,00
CFBI-102030	WHITE	10W	60W	850Lm	3000K	220-240V/AC 50/60 Hz	60°	50mA	≥0,90	203x174	605	1/8	€ 39,00
CFRO-102030	RED	10W	60W	850Lm	3000K	220-240V/AC 50/60 Hz	60°	50mA	≥0,90	203x174	605	1/8	€ 39,00
CFVE-102030	GREEN	10W	60W	850Lm	3000K	220-240V/AC 50/60 Hz	60°	50mA	≥0,90	203x174	605	1/8	€ 39,00
CFAR-202530	ORANGE	20W	100W	1600Lm	3000K	220-240V/AC 50/60 Hz	60°	90mA	≥0,90	254x210	1000	1/8	€ 49,00
CFBI-202530	WHITE	20W	100W	1600Lm	3000K	220-240V/AC 50/60 Hz	60°	90mA	≥0,90	254x210	1000	1/8	€ 49,00
CFRO-202530	RED	20W	100W	1600Lm	3000K	220-240V/AC 50/60 Hz	60°	90mA	≥0,90	254x210	1000	1/8	€ 49,00
CFVE-202530	GREEN	20W	100W	1600Lm	3000K	220-240V/AC 50/60 Hz	60°	90mA	≥0,90	254x210	1000	1/8	€ 49,00
CFAR-303030	ORANGE	30W	150W	2500Lm	3000K	220-240V/AC 50/60 Hz	60°	150mA	≥0,90	305x246	1640	1/4	€ 59,00
CFBI-303030	WHITE	30W	150W	2500Lm	3000K	220-240V/AC 50/60 Hz	60°	150mA	≥0,90	305x246	1640	1/4	€ 59,00
CFRO-303030	RED	30W	150W	2500Lm	3000K	220-240V/AC 50/60 Hz	60°	150mA	≥0,90	305x246	1640	1/4	€ 59,00
CFVE-303030	GREEN	30W	150W	2500Lm	3000K	220-240V/AC 50/60 Hz	60°	150mA	≥0,90	305x246	1640	1/4	€ 59,00

DECORATIVE LED - SUSPENSION

PER8



ADVANTAGES

E27 lamp holder included, full light point of 8 cables 150cm long. Several assembly combinations are possible.

Characteristics



Degree of protection Ok flammable surfaces

APPLICATIONS

Ideal for living rooms, dining rooms, pubs and bars.

150 cm long cables

Product code	Colour	Connection	Volt/Hertz	Cable length mm	Packing pcs	Price
PER8-150	BLACK	E27	230V/AC 50/60 Hz	1500	1/8	€ 54,90



The essentiality of shapes and uniformity of light fit into every interior space, completing it in a simple and never trivial way.



DECORATIVE LED
CEILING

BLANCA PERLA · BLANCA SLIM · PRATIKA · OASI

DECORATIVE LED - CEILING BLANCA PERLA



ADVANTAGES

LED ceiling light with pearl finish, ideal for ceiling or wall applications, with homogeneous luminous flux.

Characteristics

RA	25.000	on off	-80%	I	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for living rooms, dining rooms, bedrooms, stairs and general lighting.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
BCP-122840	12W	70W	1000Lm	4000K	230V/AC 50/60 Hz	160°	90mA	≥0,50	282x92	386	1/6	€ 20,50
BCP-183340	18W	100W	1520Lm	4000K	230V/AC 50/60 Hz	160°	135mA	≥0,50	335x102	523	1/6	€ 25,00
BCP-243840	24W	120W	1800Lm	4000K	230V/AC 50/60 Hz	160°	170mA	≥0,50	385x112	665	1/6	€ 32,00
BCP-323840	32W	140W	2240Lm	4000K	230V/AC 50/60 Hz	160°	143mA	≥0,90	385x112	700	1/6	€ 37,00

DECORATIVE LED - CEILING BLANCA SLIM



ADVANTAGES

Application to ceiling and wall, such as ceiling light or applique, with homogeneous luminous flux. Available in various colour temperatures.

Characteristics

RA	25.000	on off	-80%	I	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Great solution for living rooms, dining rooms, bedrooms, stairs and general lighting.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
BCS-142530	14W	70W	1090Lm	3000K	230V/AC 50/60 Hz	120°	120mA	≥0,50	257x65	315	1/10	€ 16,50
BCS-142540	14W	70W	1090Lm	4000K	230V/AC 50/60 Hz	120°	120mA	≥0,50	257x65	315	1/10	€ 16,50
BCS-203030	20W	100W	1550Lm	3000K	230V/AC 50/60 Hz	120°	160mA	≥0,50	290x65	382	1/10	€ 20,50
BCS-203040	20W	100W	1550Lm	4000K	230V/AC 50/60 Hz	120°	160mA	≥0,50	290x65	382	1/10	€ 20,50
BCS-243530	24W	120W	1800Lm	3000K	230V/AC 50/60 Hz	120°	190mA	≥0,50	340x65	500	1/10	€ 24,00
BCS-243540	24W	120W	1800Lm	4000K	230V/AC 50/60 Hz	120°	190mA	≥0,50	340x65	500	1/10	€ 24,00
BCS-323930	32W	140W	2240Lm	3000K	230V/AC 50/60 Hz	120°	150mA	≥0,90	390x65	670	1/10	€ 33,00
BCS-323940	32W	140W	2240Lm	4000K	230V/AC 50/60 Hz	120°	150mA	≥0,90	390x65	670	1/10	€ 33,00

DECORATIVE LED - CEILING PRATIKA



PRK
Tradizionale

PRKS
Sensor



ADVANTAGES

Application to ceiling and wall, such as light fixture or applique, with homogeneous luminous flux. The microwave presence sensor enables only in low light conditions. High shock resistance.

Characteristics

RA	30.000	on off	-79%	IP54	IK10	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection
						Ok flammable surfaces

APPLICATIONS

Great solution for living rooms, dining rooms, bedrooms, stairs and general lighting.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PRK-183240	18W	85W	1200Lm	4000K	220-240V/AC 50/60 Hz	120°	75mA	≥0,85	335x100	935	1/6	€ 53,00
PRKS-183240	18W	85W	1200Lm	4000K	220-240V/AC 50/60 Hz	120°	75mA	≥0,85	335x100	980	1/6	€ 76,00

DECORATIVE LED - CEILING

PRATIKA

emergenza



EMERGENCY

3H

AUTONOMY

ADVANTAGES

Application to ceiling and wall, such as light fixture or applique, with homogeneous luminous flux. Automatic switching in case of blackout. Battery-life 3h. Mode on: 18W 1200Lm. Emergency: 2.5W - 150Lm.

Characteristics

RA	30.000	on off	-79%		IP54	LED	IK10	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection	Ok flammable surfaces

APPLICATIONS

Great solution for living rooms, dining rooms, bedrooms, stairs and general lighting.

AUTOMATIC SWITCH-ON IN CASE OF BLACKOUT

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PRKE-183240	18W	85W	1200Lm	4000K	220-240V/AC 50/60 Hz	120°	75mA	≥0,85	335x100	1300	1/6	€ 105,00

DECORATIVE LED - CEILING OASI

2 YEARS
WARRANTY



OSOB / OSON



OSONS / OSOBS

**AUTOMATIC
SWITCH-ON**



**Proximity
Sensor**

ADVANTAGES

LED indoor ceiling, which is an alternative to traditional 75W lamps. Ceiling-walls applications with homogeneous luminous flux.

Characteristics

RA	25.000	on off	-81%		IP54	LED	
CRI>80	Lifetime (hours)	≥20.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for living rooms, stairs, entrances, corridors and general lighting.

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
OSOB-1411940	WHITE	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	212x119x60	300	1/12	€ 15,90
OSOBS-1411940	WHITE	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	212x119x60	320	1/12	€ 35,00
OSON-1411940	BLACK	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	212x119x60	300	1/12	€ 15,90
OSONS-1411940	BLACK	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	212x119x60	320	1/12	€ 35,00

DECORATIVE LED - CEILING

OASI



OSTOB / OSTON

AUTOMATIC SWITCH-ON



OSTOBPS / OSTONPS

OSTON / OSTOB

AUTOMATIC SWITCH-ON



OSTONS / OSTOBS

ADVANTAGES

LED indoor ceiling, which is an alternative to traditional 75W lamps. Ceiling-walls applications with homogeneous luminous flux.

Characteristics

							
CRI>80	Lifetime (hours)	≥20.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for living rooms, stairs, entrances, corridors and general lighting.

Available colours



Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
OSTOB-1421540	WHITE	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	215x80	380	1/12	€ 18,90
OSTOBP-1421540	WHITE	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	114°	100mA	≥0,50	215x80	400	1/12	€ 19,90
OSTOBPS-1421540	WHITE	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	114°	100mA	≥0,50	215x80	440	1/12	€ 39,00
OSTOBS-1421540	WHITE	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	215x80	420	1/12	€ 39,00
OSTON-1421540	BLACK	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	215x80	380	1/12	€ 18,90
OSTONP-1421540	BLACK	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	114°	100mA	≥0,50	215x80	400	1/12	€ 19,90
OSTONPS-1421540	BLACK	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	114°	100mA	≥0,50	215x80	440	1/12	€ 39,00
OSTONS-1421540	BLACK	14W	75W	1055Lm	4000K	220-240V/AC 50/60 Hz	120°	100mA	≥0,50	215x80	420	1/12	€ 39,00



Design and functionality coexist in these products. It is possible to illuminate and furnish at the same time, giving a special style to every location.



DECORATIVE LED
DESIGN

QUBE · RONDÒ · STYLO · PUSH & GO · UP&DOWN · FORMA · AXO

Rondò. Stylo. Qube.

Light that decorates and enhances the environments.



Rondò, Stylo and Qube are modern expressions of **efficiency and design**. Combine their shapes to get the **best of style**. Made of aluminium with anti-scratch epoxy powder coating, in white or black colouring.

Suspension or ceiling?

Stylo is a suspension. Qube and Rondò have a ceiling and a suspended version.

Play with heights.



Pure design

Their charming **shape** and light provide the right value to **each space**, decorating according to the needs.




Qube

Qube is perfect in modern and square environments. Its **minimalist style** makes it a simple but impressive piece of furniture.



Which height?

The suspension version is equipped with a **150cm long adjustable cable**.

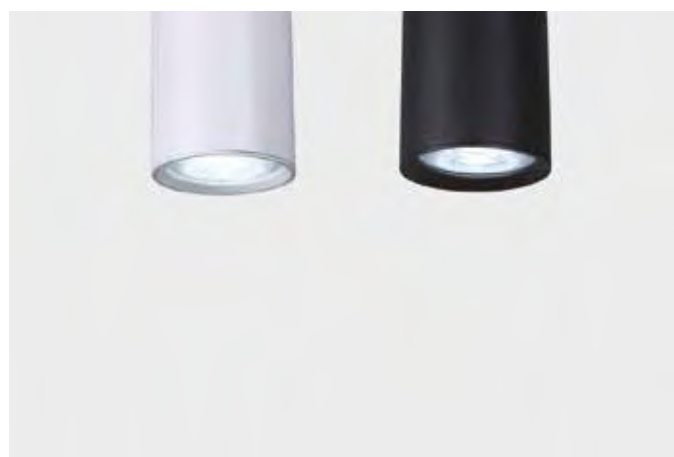

Rondò

Rondò is ideal for enhancing design environments with **soft shapes**. Style, elegance and functionality.

Choose square shapes of Qube or round shapes of Rondò and Stylo.
All products are available in **white or black finish**.

DECORATIVE LED - DESIGN QUBE



QBBI

10W 90x 90x 90h
15W 112x112x123h
25W 131x131x134h
35W 161x161x164h



QBNE

ADVANTAGES

LED light fixture with aluminium body with scratch-proof epoxy powders coating, equipped with mirrored reflector and protective glass.

Characteristics

RA	30,000	on off	-50%	I	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for living rooms, reception, modern and design environments.

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
QBBI-109040	WHITE	10W	20W CFL	800Lm	4000K	100-240V/AC 50/60 Hz	45°	70mA	≥0,50	90x90x90	395	6/24	€ 31,00
QBNE-109040	BLACK	10W	20W CFL	800Lm	4000K	100-240V/AC 50/60 Hz	45°	70mA	≥0,50	90x90x90	395	6/24	€ 31,00
QBBI-1511240	WHITE	15W	35W CFL	1350Lm	4000K	100-240V/AC 50/60 Hz	45°	120mA	≥0,50	112x123x112	639	6/24	€ 49,00
QBNE-1511240	BLACK	15W	35W CFL	1350Lm	4000K	100-240V/AC 50/60 Hz	45°	120mA	≥0,50	112x123x112	639	6/24	€ 49,00
QBBI-2513140	WHITE	25W	50W CFL	2500Lm	4000K	100-240V/AC 50/60 Hz	45°	180mA	≥0,50	131x134x131	950	6/24	€ 69,00
QBNE-2513140	BLACK	25W	50W CFL	2500Lm	4000K	100-240V/AC 50/60 Hz	45°	180mA	≥0,50	131x134x131	950	6/24	€ 69,00
QBBI-3516140	WHITE	35W	70W CFL	3675Lm	4000K	100-240V/AC 50/60 Hz	45°	170mA	≥0,90	161x164x161	1476	6/24	€ 93,00
QBNE-3516140	BLACK	35W	70W CFL	3675Lm	4000K	100-240V/AC 50/60 Hz	45°	170mA	≥0,90	161x164x161	1476	6/24	€ 93,00

DECORATIVE LED - DESIGN

RONDÓ



RNDBI

10W Ø 90 x 90h
15W Ø110 x 123h
25W Ø130 x 155h
35W Ø170 x 185h



RNDNE

ADVANTAGES

LED light fixture with aluminium body with scratch-proof epoxy powders coating, equipped with mirrored reflector and protective glass.

Characteristics

RA	30.000	on off	-50%	I	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for living rooms, reception, modern and design environments.

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
RNDBI-109040	WHITE	10W	20W CFL	800Lm	4000K	100-240V/AC 50/60 Hz	45°	70mA	≥0,50	90x90	322	6/24	€ 31,00
RNDNE-109040	BLACK	10W	20W CFL	800Lm	4000K	100-240V/AC 50/60 Hz	45°	70mA	≥0,50	90x90	322	6/24	€ 31,00
RNDBI-1511040	WHITE	15W	35W CFL	1350Lm	4000K	100-240V/AC 50/60 Hz	45°	120mA	≥0,50	110x123	551	6/24	€ 49,00
RNDNE-1511040	BLACK	15W	35W CFL	1350Lm	4000K	100-240V/AC 50/60 Hz	45°	120mA	≥0,50	110x123	551	6/24	€ 49,00
RNDBI-2513040	WHITE	25W	50W CFL	2500Lm	4000K	100-240V/AC 50/60 Hz	45°	180mA	≥0,50	130x155	838	6/24	€ 69,00
RNDNE-2513040	BLACK	25W	50W CFL	2500Lm	4000K	100-240V/AC 50/60 Hz	45°	180mA	≥0,50	130x155	838	6/24	€ 69,00
RNDBI-3517040	WHITE	35W	70W CFL	3675Lm	4000K	100-240V/AC 50/60 Hz	45°	170mA	≥0,90	170x185	1400	6/24	€ 93,00
RNDNE-3517040	BLACK	35W	70W CFL	3675Lm	4000K	100-240V/AC 50/60 Hz	45°	170mA	≥0,90	170x185	1400	6/24	€ 93,00



QBBIP

 5W 90x 90x 90h
 15W 110x110x123h

RNDNEP

ADVANTAGES

LED suspension with aluminium body with scratch-proof epoxy powders coating, equipped with mirrored reflector and protective glass. 150cm long cable.

Characteristics

RA	30.000	on off	-67%	I	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for living rooms, reception, modern and design environments.

150 CM LONG CABLE

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
QBBIP-059040	WHITE	5W	15W CFL	450Lm	4000K	100-240V/AC 50/60 Hz	45°	40mA	≥0,50	90x90x90	598	6/24	€ 36,00
QBNEP-059040	BLACK	5W	15W CFL	450Lm	4000K	100-240V/AC 50/60 Hz	45°	40mA	≥0,50	90x90x90	598	6/24	€ 36,00
RNDBIP-1511040	WHITE	15W	35W CFL	1275Lm	4000K	100-240V/AC 50/60 Hz	45°	120mA	≥0,50	110x123	751	6/24	€ 55,00
RNDNEP-1511040	BLACK	15W	35W CFL	1275Lm	4000K	100-240V/AC 50/60 Hz	45°	120mA	≥0,50	110x123	751	6/24	€ 55,00

DECORATIVE LED - DESIGN STYLO



STYLO600

STYLO500

3W Ø25 x 600h
5W Ø33 x 500h

ADVANTAGES

LED suspension with aluminium body with scratch-proof epoxy powders coating, equipped with mirrored reflector and protective glass. 150cm long cable.

Characteristics

RA	30.000	on off	-67%	I	IP20	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for living rooms, reception, modern and design environments.

150 CM LONG CABLE

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
STYLOBI600-032540	WHITE	3W	9W CFL	220Lm	4000K	100-240V/AC 50/60 Hz	60°	30mA	≥0,50	25x605	453	6/24	€ 29,00
STYLO600-032540	BLACK	3W	9W CFL	220Lm	4000K	100-240V/AC 50/60 Hz	60°	30mA	≥0,50	25x605	453	6/24	€ 29,00
STYLOBI500-053340	WHITE	5W	15W CFL	450Lm	4000K	100-240V/AC 50/60 Hz	60°	45mA	≥0,50	33x505	618	6/24	€ 36,00
STYLO500-053340	BLACK	5W	15W CFL	450Lm	4000K	100-240V/AC 50/60 Hz	60°	45mA	≥0,50	33x505	618	6/24	€ 36,00

DECORATIVE LED - DESIGN PUSH & GO



ADVANTAGES

LED 10W/20W applique for both indoor and outdoor, with dual light output mode: direct and indirect.

Characteristics


RA	30.000	on off	-78%		IP65	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Suitable for living rooms, dining rooms, hotels, bars and professional environments.


TWO LIGHT EMISSION MODES

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PHG-1018030	10W	45W	600Lm	3000K	230V/AC 50/60 Hz	160°	75mA	> 0,50	180x37	289	1/20	€ 19,90
PHG-1018040	10W	45W	600Lm	4000K	230V/AC 50/60 Hz	160°	75mA	> 0,50	180x37	289	1/20	€ 19,90
PHG-2023030	20W	85W	1200Lm	3000K	230V/AC 50/60 Hz	160°	150mA	> 0,50	228x40	444	1/20	€ 31,00
PHG-2023040	20W	85W	1200Lm	4000K	230V/AC 50/60 Hz	160°	150mA	> 0,50	228x40	444	1/20	€ 31,00



DIRECT EMISSION

If you push the frame of the ceiling light towards the wall, the light source will be at the front. The result is a direct and high-intensity light output.



INDIRECT EMISSION

Accent lighting
If you pull the frame of the ceiling light forward, the light source will be at the back. The result is an indirect light output, with a soft effect.

DECORATIVE LED - DESIGN UP&DOWN



UDBI



UDGR



UDNE

ADVANTAGES

Aluminium design applique with two-way light beam, adjustable with fins. Available in 3 different finishes and two colour temperatures.


Characteristics

RA	30.000	on off	-85%	I	IP65	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Suitable for living rooms, gardens, terraces and general lighting.

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
UDBI-068030	WHITE	6W	40W	550Lm	3000K	220-240V/AC 50/60 Hz	7° - 100°	58mA	≥0,50	80x80x80	395	10/20	€ 49,00
UDBI-068040	WHITE	6W	40W	550Lm	4000K	220-240V/AC 50/60 Hz	7° - 100°	58mA	≥0,50	80x80x80	395	10/20	€ 49,00
UDGR-068030	GREY	6W	40W	550Lm	3000K	220-240V/AC 50/60 Hz	7° - 100°	58mA	≥0,50	80x80x80	395	10/20	€ 49,00
UDGR-068040	GREY	6W	40W	550Lm	4000K	220-240V/AC 50/60 Hz	7° - 100°	58mA	≥0,50	80x80x80	395	10/20	€ 49,00
UDNE-068030	BLACK	6W	40W	550Lm	3000K	220-240V/AC 50/60 Hz	7° - 100°	58mA	≥0,50	80x80x80	395	10/20	€ 49,00
UDNE-068040	BLACK	6W	40W	550Lm	4000K	220-240V/AC 50/60 Hz	7° - 100°	58mA	≥0,50	80x80x80	395	10/20	€ 49,00

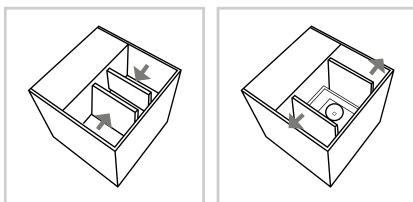

Adjustable plates from 7 degrees to a maximum of 100 degrees to create different lighting effects

NEW

DECORATIVE LED - DESIGN FORMA

2 YEARS
WARRANTY



FRMB

**Bi-directional
applique**



FRMN

ADVANTAGES

Two-way aluminium applique with a modern and exclusive design. It produces decorative lighting through a diffuse effect on the wall. It is also suitable for protected outdoor environments.

Characteristics

RA	40.000	on off	-84%	I	IP54	LED
CRI>80	Lifetime	≥20.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for terraces, porches, accesses, garages, gardens, outdoor areas.

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
NEW FRMB-129030	WHITE	12W	75W	820Lm	3000K	220-240V/AC 50/60 Hz	120°	92mA	≥0,50	175x90x29	570	6/18	€ 43,00
NEW FRMB-129040	WHITE	12W	75W	820Lm	4000K	220-240V/AC 50/60 Hz	120°	92mA	≥0,50	175x90x29	570	6/18	€ 43,00
NEW FRMN-129030	BLACK	12W	75W	820Lm	3000K	220-240V/AC 50/60 Hz	120°	92mA	≥0,50	175x90x29	570	6/18	€ 43,00
NEW FRMN-129040	BLACK	12W	75W	820Lm	4000K	220-240V/AC 50/60 Hz	120°	92mA	≥0,50	175x90x29	570	6/18	€ 43,00



NEW

DECORATIVE LED - DESIGN

AXO

2 YEARS
WARRANTY



AXO
1GU10B
1 Slot GU10

AXO
2GU10B
Bi-directional
2 Slot GU10



**We recommend the use of
38 degrees LEXAR GU10
from 6W to 8W -
page 87**

ADVANTAGES

Single or bi-directional appliques, with a modern design. They produce decorative lighting by cutting light on the walls. Die cast aluminium body, tempered glass, silicone seals, stainless steel screws. Compatible with GU10 bulbs (not included).

Characteristics

RA	30.000	on off	-86%	I	IP44	LED	F
CRI>80	Lifetime	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for terraces, porches, accesses, garages, gardens, outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW AXO-1GU10B	-	-	-	-	230V 50/60Hz	60°	-	-	92x66x78	305	12/24	€ 17,90
NEW AXO-2GU10B	-	-	-	-	230V 50/60Hz	60°	-	-	92x66x150	505	12/24	€ 23,90



NEW

DECORATIVE LED - DESIGN AXO



AXO
5W
Integrated Chip
IP54

ADVANTAGES

Modern design applique that produces decorative light through light-cutting effect on the walls. Die cast aluminium body, tempered glass, silicone seals, stainless steel screws.

Characteristics

RA	30.000	on off	-86%	I	IP44	LED	F
CRI>80	Lifetime	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for terraces, porches, accesses, garages, gardens, outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
NEW AXO-0540B	5W	35W	350Lm	4000K	230V 50/60Hz	120°	25mA	≥0,90	126x95x65	344	12/24	€ 34,90



DECORATIVE LED - DESIGN AXO



AXO
10W

AXO
20W
Bi-directional

ADVANTAGES

Single or bi-directional appliques, with modern design. They produce decorative lighting by cutting light on the walls. Die cast aluminium body, tempered glass, silicone seals, stainless steel screws.

Characteristics

RA	30.000	on off	-86%	I	IP44	LED	F
CRI>80	Lifetime	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Ideal for terraces, porches, accesses, garages, gardens, outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Lxhx mm	Weight gr	Packing pcs	Price
AXO-109030	10W	60W	800Lm	3000K	220-240V/AC 50/60 Hz	36°	87mA	≥0,50	90x200x155	900	1/6	€ 57,00
AXO-109040	10W	60W	800Lm	4000K	220-240V/AC 50/60 Hz	36°	87mA	≥0,50	90x200x155	900	1/6	€ 57,00
AXO-209030	20W	100W	1600Lm	3000K	220-240V/AC 50/60 Hz	36°	175mA	≥0,50	90x260x155	1300	1/6	€ 69,00
AXO-209040	20W	100W	1600Lm	4000K	220-240V/AC 50/60 Hz	36°	175mA	≥0,50	90x260x155	1300	1/6	€ 69,00





OUTDOOR

Outdoor spaces deserve to be enhanced with efficient and elegant LED lighting.





GARDEN · SOLAR · WALK-OVER · WALL AND CEILING · ACCESSORIES



Designed to illuminate outdoor spaces highlighting their particulars. Beautiful design and ease of application make them the perfect choice to increase gardens' value.



OUTDOOR
GARDEN

GAUDINO · ALADINO · PALADINO · LILANDÀ · SPIKE LIGHT · FIESTA LED

OUTDOOR - GARDEN

GAUDINO - ALADINO - PALADINO



GDN

ALD

PLD

ADVANTAGES

LED garden pole lights and appliques. Aluminium anti-corrosion body, silver grey RAL 7040 paint. Energy savings of 78%.

Characteristics

RA	30.000	on off	-78%	I	IP54	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Created for gardens, terraces, driveways and general outdoor lighting.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
GDN-058030	5,5W	40W	450Lm	3000K	195-265V/AC 50/60 Hz	120°	45mA	≥0,52	800x92x150	1900	1/6	€ 65,00
GDN-051530	5,5W	40W	360Lm	3000K	195-265V/AC 50/60 Hz	120°	45mA	≥0,52	150x89x43	480	1/24	€ 38,00
ALD-056030	5,5W	40W	450Lm	3000K	195-265V/AC 50/60 Hz	120°	45mA	≥0,52	600x100x150	2220	1/6	€ 91,00
ALD-051630	5,5W	40W	360Lm	3000K	195-265V/AC 50/60 Hz	120°	45mA	≥0,52	195x100x165	1300	1/12	€ 53,00
PLD-058030	4W	25W	270Lm	3000K	195-265V/AC 50/60 Hz	120°	30mA	≥0,52	800x100x60	2000	1/8	€ 96,00
PLD-051230	6W	40W	450Lm	3000K	195-265V/AC 50/60 Hz	120°	30mA	≥0,52	240x120x65	980	1/12	€ 50,00

Driver replacement

Product code	Watt	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
RDGDN-051530	5,5W	> 0,50	70x22x25	50	1/1	€ 13,00
RDGDN-058030	6W	> 0,50	70x22x25	50	1/1	€ 13,00
RDALD-051630	5,5W	> 0,50	70x22x25	50	1/1	€ 13,00
RDALD-056030	5,5W	> 0,50	70x22x25	50	1/1	€ 13,00
RDPLD-051230	6W	> 0,50	70x22x25	50	1/1	€ 13,00
RDPLD-058030	6W	> 0,50	70x22x25	50	1/1	€ 13,00

OUTDOOR - GARDEN LILANDÀ



LLD1P

100 cm

LLD3P

220 cm

ADVANTAGES

Aluminium lamppost with cataphoresis treatment and polyester painting. Designed for outdoor, corrosion-resistant environments. Energy savings of 78%.

Characteristics

RA	30.000	on off	-78%	I	IP44	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Created for driveways, green spaces, outdoor places exposed to splashes of water.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
LLD1P-108040	10W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	120°	74mA	≥0,50	167x1000x175.3	1024	1/6	€ 39,00
LLD3P-108040	10W	120W	1850Lm	4000K	220-240V/AC 50/60 Hz	120°	222mA	≥0,50	456.3x2200x417.5	4550	1/1	€ 172,00

LED SOURCE REPLACEMENT WITH COVER



MOD. RSLD 10W
4000K RA>80 806LM
INPUT: 220-240V 50/60Hz
74mA PF>0.5
IP44 CLASS I

Product code	Packing pcs	Price
RSLD	1/100	€13,90



LLDAL
DOWNWARD

LLDBA
UPWARD

LLDSE
SENSOR

ADVANTAGES

Aluminium applique with cataphoresis treatment and polyester painting. Designed for outdoor, corrosion-resistant environments. Energy savings of 78%.

Characteristics

RA	30.000	on off	-78%	I	IP44	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Ok flammable surfaces

APPLICATIONS

Created for driveways, green spaces, outdoor places exposed to splashes of water.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
LLDAL-108040	10W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	120°	74mA	≥0,50	195x221	594	1/6	€ 29,00
LLDBA-108040	10W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	120°	74mA	≥0,50	195x223	602	1/6	€ 29,00
LLDSE-108040	10W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	120°	74mA	≥0,50	195x256	705	1/6	€ 39,00

LED SOURCE REPLACEMENT WITH COVER



MOD. RSLLD 10W
4000K RA>80 806LM
INPUT: 220-240V 50/60Hz
74mA PF>0.5
IP44 CLASS I

Product code	Packing pcs	Price
RSLLD	1/100	€ 13,90



LLDCA

ADVANTAGES

Aluminium suspension with cataphoresis treatment and polyester painting. Designed for outdoor, corrosion-resistant environments. Energy savings of 78%.

Characteristics

RA	30.000	on off	-78%	I	IP44	LED	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Ok flammable surfaces

APPLICATIONS

Created for driveways, green spaces, outdoor places exposed to splashes of water.

62 CM CABLE

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
LLDCA-108040	10W	60W	806Lm	4000K	220-240V/AC 50/60 Hz	120°	74mA	≥0,50	167x221	708	1/6	€ 29,00

LED SOURCE REPLACEMENT WITH COVER



MOD. RSLD 10W
4000K RA>80 806LM
INPUT: 220-240V 50/60Hz
74mA PF>0.5
IP44 CLASS I

Product code	Packing pcs	Price
RSLD	1/100	€ 13,90

OUTDOOR - GARDEN

SPIKE LIGHT



ADVANTAGES

Die cast aluminium LED spike light. IP65 security factor, easy to install. Energy savings of 80%.

Characteristics

RA	30.000	on off	-80%	III	IP65	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for gardens, entrances, courtyards, decorative lighting.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Dimensions LxIhx mm	Weight gr	Packing pcs	Price
SPK-032230	3W	15W	150Lm	3000K	24V/DC	30°	120mA	60x76x230	205	1/30	€ 36,00

ACCESSORIES:

3-WAY BOX JUNCTION CONNECTOR
2-WAY LINEAR JUNCTION CONNECTOR (13A)
2-WAY LINEAR JUNCTION CONNECTOR (24A)
3-WAY T-SHAPE JUNCTION CONNECTOR
DRIVER 230V-24VAC IP-68

Cod. CNB Pag. 307
Cod. CND15 Pag. 307
Cod. CND25 Pag. 307
Cod. CNT Pag. 307
Cod. DR60 / DR80 Pag. 307

OUTDOOR - GARDEN FIESTA LED

2 YEARS
WARRANTY



FSTABCL
E27

FSTACL
E27

FSTACO
E27

ADVANTAGES

Light chain of 10 low voltage powered LED bulbs. Length 5.16 m plus 3.34 m cable extension. Driver included with schukoplug.

Characteristics

RA	III	IP44
CRI>83	Insulation class	Degree of protection

FSTARCO

Bulb replacement available in colouring:



APPLICATIONS

Ideal for gardens, gazebo, pergolas, railings, housing exteriors, outdoor communal areas.

INTERCHANGEABLE BULBS

You can link 2 chains up to 13.5m

Product code	Type	Total lenght	Watt	Lumen	Light colour	Volt/Hertz	Milliamps	Weight gr	Packing pcs	Price
NEW FSTABCL-062722	Transparent glass White cable	8,5m	6W	500Lm	2200K	220-240V/AC 50/60 Hz	100mA	1000	1/5	€ 85,00
FSTACL-062722	Transparent glass Black cable	8,5m	6W	500Lm	2200K	220-240V/AC 50/60 Hz	100mA	1000	1/5	€ 85,00
FSTACO-062722	Multicolor glass Black cable	8,5m	6W	200Lm	2200K	220-240V/AC 50/60 Hz	100mA	1000	1/5	€ 85,00
FSTARCL-062722	Single Clear lamp	-	0.6W	50Lm	2200K	36V/DC	10mA	25	1/100	€ 5,50
NEW FSTARBLU-062722	Single Blue lamp	-	0.6W	20Lm	-	36V/DC	10mA	25	1/100	€ 5,50
NEW FSTARGI-062722	Single Yellow lamp	-	0.6W	20Lm	-	36V/DC	10mA	25	1/100	€ 5,50
NEW FSTARMAG-062722	Single Magenta lamp	-	0.6W	20Lm	-	36V/DC	10mA	25	1/100	€ 5,50
NEW FSTARRO-062722	Single Red lamp	-	0.6W	20Lm	-	36V/DC	10mA	25	1/100	€ 5,50
NEW FSTARVE-062722	Single Green lamp	-	0.6W	20Lm	-	36V/DC	10mA	25	1/100	€ 5,50

DRIVER REPLACEMENT

Product code	Watt	Volt/Hertz	Packing pcs	Price
FSTADAP-12W	12W	220-240V/AC 50/60 Hz	1/30	€ 16,00

Space between lamps	Chain lenght	Extension cable lenght	Total lenght
0,44m	5,16m	3,34m	8,5m



They use solar energy to generate intense and high-quality light. With energy costs reduced to zero and environment safety, everything around us is brighter than ever.



OUTDOOR
SOLAR

ARCADIA 1.5 · ARCADIA 3.2 · ARCADIA 6.8
DIVERSO · LEVANTE

ARCADIA


LED outdoor solar appliques



ARCADIA 1.5
ALSO BLISTER VERSION



ARCADIA 3.2

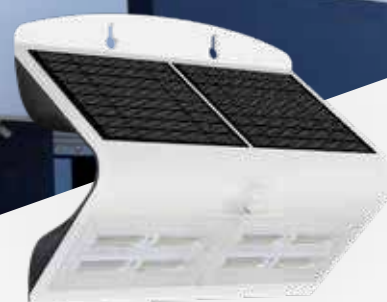

ARCADIA 6.8



UNIQUE DESIGN AND POWER SWITCH

Light output also on the back device.

Power and mode selection button.

LITHIUM BATTERY

Battery can be recharged in about 6 hours during the day thanks to a good sun exposure. Battery life is about 12-16 h. The most powerful models have model 18650 batteries (one for the 3.2W, two for the 6.8W), replaceable, **high-capacity and long-life**.



HIGH-QUALITY SOLAR PANEL

High-quality photoelectric solar panel with high efficiency energetic conversion.

PIR SENSOR

It automatically turns on when people or things pass by. Designed for a wide 120° detection angle with a range of 2 to 6 m.



OUTDOOR - SOLAR ARCADIA 1.5



ACS B



ACS S

**THREE SENSOR
OPERATION MODE**

12 HOURS of continuous light
FOR Free

ZERO costs in light bill

NO wiring



ADVANTAGES

Shock-resistant PBT (polybutylentereftalate) body. Equipped with lithium battery from 3.7V - 1200mA. Charging time 4-6h and 12-16h battery life. Equipped with A PIR sensor, with automatic switching for 10 seconds with a 2-6m angle of action and a 120-degree detection angle. 100% energy saving.

Characteristics

25.000	on off	-100%	III	IP65	IK07	F
Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Great solution for courtyards, terraces, gardens, alleys and general lighting of the outdoor areas.



Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
ACSB-151240	WHITE	1,5W	18W	200Lm	4000K	3,7 V/DC -	120°	1200mA	-	96x152x83	217	6/24	€ 24,90
ACSS-151240	SILVER	1,5W	18W	200Lm	4000K	3,7 V/DC -	120°	1200mA	-	96x152x83	217	6/24	€ 24,90



ATTENTION:

The performance of autonomy depends heavily on the type of installation.

As a solar-powered product, it must be exposed in such a way as to receive the maximum direct radiation time during daylight hours.

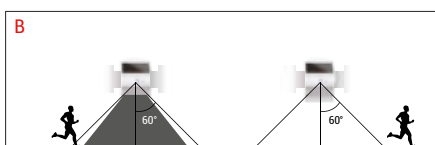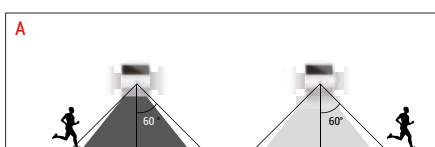

MODE A

((Pressing the power button once)

After sunset – when a movement is detected in a 2-6 meter range – it automatically turns on at full brightness (220lm). After 10 seconds it returns to standby mode at 10% light intensity (front and back light on).

MODE B

((Pressing the power button twice)

After sunset – when a movement is detected in a 2-6 meter range – it automatically turns on at full brightness (220lm). After 10 seconds it returns to standby mode at 3% light intensity (only back light on).

If you press the power button three times, it turns off completely.

OUTDOOR - SOLAR ARCADIA 1.5


2 YEARS
WARRANTY



ACSBL



ACSSL



ADVANTAGES

Shock-resistant PBT(polybutilentereftalate)body. Equipped with lithium battery from 3.7V - 1200mA. Charging time 4-6h and 12-16h battery life. Equipped with A PIR sensor, with automatic switching for 10 seconds with a 2-6m range of action and a 120-degree detection angle. 100% energy saving.

APPLICATIONS

Great solution for courtyards, terraces, gardens, alleys and general lighting of the outdoor areas.

Characteristics

25.000	on off	-100%	III	IP65	IK07	F
Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Power factor	Dimensions LxHxW mm	Weight gr	Packing pcs	Price
ACSBL-151240BL	WHITE	1,5W	18W	220Lm	4000K	3,7 V/DC -	120°	1200mA	-	145x96x73	209	4/16	€ 23,90
ACSSL-151240BL	SILVER	1,5W	18W	220Lm	4000K	3,7 V/DC -	120°	1200mA	-	145x96x73	209	4/16	€ 23,90



ATTENTION:

The performance of battery life depends heavily on the place of installation.

As a solar-powered product, it must be exposed in such a way as to receive the maximum direct radiation time during daylight hours.

OUTDOOR - SOLAR

ARCADIA 3.2

ARCADIA 6.8



ARCADIA
3,2 W

ARCADIA
6,8 W

**THREE SENSOR
OPERATION MODE**

12 HOURS of continuous light
FOR Free

ZERO costs in light bill

NO wiring



ADVANTAGES

Shock-resistant PBT(polybutilentereftalate)body. Equipped with lithium battery from 3.7V - 1200mA. Charging time 4-6h and battery life 12-16h. Equipped with A PIR sensor, with automatic switching on for 10 seconds with a 2-6m range of action and a 120-degree detection angle. Three modes of working. 100% energy saving.

Characteristics

35,000	on off	-100%	III	IP65	IK07	F
Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Great solution for courtyards, terraces, gardens, alleys and general lighting of the outdoor areas.


Product code	Colour	Watt	Equiva- lent	Lumen	Light colour	Volt/ Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
ACSB-321240	WHITE	3,2W	40W	400lm	4000K	3,7 V/DC -	60° - 120°	2000mA	-	212x140x109	484	1/12	€ 54,90
ACSS-321240	SILVER	3,2W	40W	400lm	4000K	3,7 V/DC -	60° - 120°	2000mA	-	212x140x109	484	1/12	€ 54,90
ACSB-681240	WHITE	6,8W	60W	750lm	4000K	3,7 V/DC -	60° - 120°	4000mA	-	270x110x119	920	1/8	€ 89,90



ATTENTION:

The performance of battery life depends heavily on the place of installation. As a solar-powered product, it must be exposed in such a way as to receive the maximum direct radiation time during daylight hours.

If you press the power button for four times the device turns off completely.

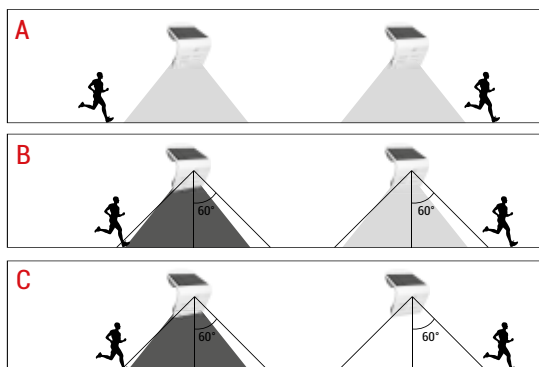

MODE A (Pressing the power button once)
Twilight mode.
It automatically turns on at sunset (<30 lux), ensuring a 20% light intensity for 5 hours.

MODE B (Pressing the power button twice) After sunset – when a movement is detected in a 2-6 meter range – it automatically turns on at full brightness (400lm). After 20 seconds it returns to standby mode at 3% light intensity (only back light on).

MODE C (Pressing the power button three times) After sunset – when a movement is detected in a 2-6 meter range – it automatically turns on at full brightness (400lm). After 30 seconds, it turns off completely.



DiVerso

Solar LED floodlight designed to make the most of sun's energy and generate high-quality intense light. Zero energy costs and environment safety.

PRESENCE SENSOR

You can keep your device in **constant light mode or PIR sensor mode**. The sensor mode turns the device on when someone passes by and off after a certain period of inactivity, optimizing battery life.





BATTERY LIFE

With 12 hours of battery life, DiVerso illuminates the courtyard, the outside of a garage or entrance without energy costs.

Over
110
Lumen/Watt

More than
12 h
Battery life

CONSTANT LIGHT

The floodlight stays on until you run out of battery and automatically returns to sensor mode once it is recharged.

Over
100%
Savings

Zero costs in light bill

OUTDOOR - SOLAR

DiVerso



TWO MODES
• **CONSTANT LIGHT**
• **SENSOR**

12 HOURS of continuous light
FOR Free

ZERO costs in light bill

NO wiring



ADVANTAGES

100% energy saving. Integrated photovoltaic panel, with user replaceable battery (1-year warranty), 6h charging time, battery life is about 12h. It has a sensor with a 120-degree detection angle and a range of action of 6m. Installation at height between 3 and 4m. Dual function mode: constant light and sensor.

Characteristics

RA	35.000	on off	-100%	III	IP65
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection

APPLICATIONS

Ideal for gardens, boulevards, emergency or work light courtyards, camping, general lighting of outdoor areas.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
DVS-059040	5W	50W ALO	500Lm	4000K	3,7 V/DC -	90°	3000mA	-	217.4x33.7x149.3	713	1/12	€ 49,90



360-degree adjustable bracket



WALL FIXING COMPONENTS AND BRACKET SUPPLIED

1 - WALL FIXING



135-degree ADJUSTABLE PANEL



2 - POSITIONING ON FLAT SURFACE

OUTDOOR - SOLAR DiVerso



**THREE SENSOR
OPERATION MODE**

20 HOURS of continuous light
FOR Free

ZERO costs in light bill

NO wiring



PIR sensor



Photovoltaic
panel

ADVANTAGES

100% energy saving. Integrated photovoltaic panel, with user replaceable battery (1-year warranty), 6h charging time, battery life is about 20h. It has a sensor with a 120-degree detection angle and a range of action of 6m. Installation at height between 3 and 4m. Three modes of sensor function.

Characteristics

RA	35.000	on off	-100%	III	IP65
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection

APPLICATIONS

Ideal for gardens, boulevards, courtyards, emergency or work light, camping, general lighting of outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
DVS-109040	10W	100W ALO	1080Lm	4000K	3,7 V/DC -	90°	7200mA	-	310x35x215	1420	1/8	€89,90

ACCESSORIES

Product code	Dimensions LxHx mm	Weight gr	Packing pcs	Price
RBDVS	35x130x20	180	1/100	€ 26,00
RBDVS-05	18x35x130.2x20	830	1/100	€ 13,00



BRACKET INCLUDED IN THE PACK



**180-degree detection angle
Up to 8 m detection distance**



360-degree adjustable bracket



135-degree adjustable panel



**1. WALL FIXING
2. POLE MOUNTING WITH BRACKET
SUPPLIED**

OUTDOOR - SOLAR LEVANTE



8 HOURS of continuous light
FOR Free

ZERO costs in light bill

NO wiring



LVT05
5W

SUITABLE FOR Ø 20-60 mm POLES



LVT15
15W



PIR sensor



Photovoltaic panel

ADVANTAGES

100% energy saving. Photovoltaic lamppost with 6-8h charging time during the day and battery life is about 8h, with the possibility of fixing to the wall or pole via the supplied bracket. Pole NOT included. User replaceable battery.

Characteristics

RA	50.000	on off	-100%	III	IP65	IK07
CRI>75	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Impact protection

APPLICATIONS

Ideal for pedestrian boulevards, public gardens, residence outdoor areas and industrial buildings.

POLE IS NOT SUPPLIED

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
LVT-059540	5W	60W ALO	500Lm	4000K	Battery LifePo4 6.4V 3AH	120°	3000mA	-	205x55x367	1100	1/5	€ 149,00
NEW LVT-159540	15W	180W ALO	1600Lm	4000K	Battery LifePo4 6.4V 3AH	140°	5400mA	-	232x58x413	1730	1/10	€105,00

Accessory LVT-059540



Battery replacement

Product code	Packing pcs	Price
NEW RBLVT	1/1	€ 38,00

POLE ADAPTERS LVT-159540 INCLUDED



for oblique pole (included)
Pole Ø40/50mm



for the wall (included)

Accessory LVT-159540



POLE ADAPTERS Ø40/60mm

Product code	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW ATPLVT	39x90x170	272	1/24	€ 16,90



WELCOME THE SUN
TO GENERATE LIGHT





Lighting knows polite ways: it can get noticed while keeping a low profile.



OUTDOOR
WALK-OVER

PAVI

OUTDOOR - WALK-OVER PAVI



PAVI1L

PAVI2L

ADVANTAGES

Walk-over appliance for floor installation. Aluminium body, neoprene cable, one-way and two-way light output. Maximum pressure resistance of 500kg.

Characteristics

RA	30.000	on off	-90%	I	IP67	LED	IK09		
CRI>70	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection	Walkable	Driveways

APPLICATIONS



Ideal for terraces, porches, garage accesses, gardens and general lighting of outdoor areas.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PAVI1L-047030	0,4W	-	8Lm	3000K	24V AC/DC 50/60 Hz	100°	20mA	> 0,40	70x13	125	6/24	€ 16,50
PAVI1L-047040	0,4W	-	8Lm	4000K	24V AC/DC 50/60 Hz	100°	20mA	> 0,40	70x13	125	6/24	€ 16,50
PAVI2L-087030	0,8W	-	16Lm	3000K	24V AC/DC 50/60 Hz	100°	40mA	> 0,40	70x13	120	6/24	€ 17,90
PAVI2L-087040	0,8W	-	16Lm	4000K	24V AC/DC 50/60 Hz	100°	40mA	> 0,40	70x13	120	6/24	€ 17,90

ACCESSORIES:

3-WAY BOX JUNCTION CONNECTOR
2-WAY LINEAR JUNCTION CONNECTOR (13A)
2-WAY LINEAR JUNCTION CONNECTOR (24A)
3-WAY T-SHAPE JUNCTION CONNECTOR
DRIVER 230V-24VAC IP-68

Cod. CNB Pag. 307
Cod. CND15 Pag. 307
Cod. CND25 Pag. 307
Cod. CNT Pag. 307
Cod. DR60 / DR80 Pag. 307



OUTDOOR - WALK-OVER PAVI



MP
1W

PAVI
1W

MP
3W

PAVI
3W

ADVANTAGES

Round LED recessed fixture for wall, ceiling or floor installation. Satin aluminium ring (1W), stainless steel (3W). Aluminium body, tempered glass, neoprene cable.

Characteristics

RA	30.000	on off	-88%	III	IP65	LED	IK06	Footprint	Tire
CRI>70	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection	Walkable	Driveways

APPLICATIONS


Ideal for terraces, porches, garage accesses, gardens and general lighting of outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
MP-014030	1W	-	70Lm	3000K	24V AC/DC 50/60 Hz	30°	50mA	≥0,40	40x57	73	6/24	€ 23,50
MP-014040	1W	-	70Lm	4000K	24V AC/DC 50/60 Hz	30°	50mA	≥0,40	40x57	73	6/24	€ 23,50
PAVI-014230	1W	-	80Lm	3000K	24V AC/DC 50/60 Hz	24°	40mA	-	42x73	220	6/24	€ 31,00
PAVI-014240	1W	-	80Lm	4000K	24V AC/DC 50/60 Hz	24°	40mA	-	42x73	220	6/24	€ 31,00
MP-036030	3W	-	90Lm	3000K	24V AC/DC 50/60 Hz	100°	140mA	≥0,40	60x95	228	6/24	€ 39,50
MP-036040	3W	-	90Lm	4000K	24V AC/DC 50/60 Hz	100°	140mA	≥0,40	60x95	228	6/24	€ 39,50
PAVI-038930	3W	25W	240Lm	3000K	24V AC/DC 50/60 Hz	12°	140mA	≥0,50	89x120	630	1/6	€ 57,00
PAVI-038940	3W	25W	240Lm	4000K	24V AC/DC 50/60 Hz	12°	140mA	≥0,50	89x120	630	1/6	€ 57,00


ACCESSORIES:

3-WAY BOX JUNCTION CONNECTOR
2-WAY LINEAR JUNCTION CONNECTOR (13A)
2-WAY LINEAR JUNCTION CONNECTOR (24A)
3-WAY T-SHAPE JUNCTION CONNECTOR
DRIVER 230V-24VAC IP-68

Cod. CNB Pag. 307
Cod. CND15 Pag. 307
Cod. CND25 Pag. 307
Cod. CNT Pag. 307
Cod. DR60 / DR80 Pag. 307




MP-1W



PAVI-1W



MP-3W



PAVI-3W



Polycarbonate
counter case
included



OUTDOOR - WALK-OVER PAVI



PAVI
(1 slot GU10)
IK06

PAVI
7W

PAVI
12W



ADVANTAGES

Vehicle-resistant LED recessed light for floor installation. Aluminium ring and body, tempered glass, neoprene cable with polycarbonate countercase included. Maximum pressure resistance of 500kg.

Characteristics

RA	30.000	on off	-83%	III	IP65	IK06	Walkable	Driveways
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Walkable	Driveways

APPLICATIONS

Ideal for terraces, porches, garage accesses, gardens and general lighting of outdoor areas.

	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle		Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW PAVI-GU10	-	-	-	-	-	-	-	-	100x125 (hole 87)	508	1/6	€ 26,00
PAVI-078930	7W	40W	480Lm	3000K	24V AC/DC 50/60 Hz	12°	250mA	≥0,50	89x120	686	1/6	€ 59,90
PAVI-078940	7W	40W	480Lm	4000K	24V AC/DC 50/60 Hz	12°	250mA	≥0,50	89x120	686	1/6	€ 57,00
PAVI-1216030	12W	60W	840Lm	3000K	24V AC/DC 50/60 Hz	10°	450mA	≥0,50	160x110	1600	1/6	€ 105,00
PAVI-1216040	12W	60W	840Lm	4000K	24V AC/DC 50/60 Hz	10°	450mA	≥0,50	160x110	1600	1/6	€ 105,00

ACCESSORI:

3-WAY BOX JUNCTION CONNECTOR
2-WAY LINEAR JUNCTION CONNECTOR (13A)
2-WAY LINEAR JUNCTION CONNECTOR (24A)
3-WAY T-SHAPE JUNCTION CONNECTOR
DRIVER 230V-24VAC IP-68

Cod. CNB Pag. 307
Cod. CND15 Pag. 307
Cod. CND25 Pag. 307
Cod. CNT Pag. 307
Cod. DR60 / DR80 Pag. 307



**Polycarbonate
countercase
included**

OUTDOOR - WALK-OVER PAVI



PAVIC2L
5W

PAVIC4L
5W



ADVANTAGES

Walk-over appliance for floor installation. Grey RAL 7035 aluminium head. Aluminium body, neoprene cable, polycarbonate counter case included. Two-way light output, maximum pressure resistance of 500kg.

Characteristics

RA	30,000	on off	-67%	III	IP67	IK06	Footprint	Tire
CRI>70	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Walkable	Driveways

APPLICATIONS

Ideal for terraces, porches, garage accesses, gardens and general lighting of outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
PAVIC2L-0513030	5W	15W	160Lm	3000K	24V AC/DC 50/60 Hz	100°	150mA	≥0,50	130x130	800	1/6	€ 65,00
PAVIC2L-0513040	5W	15W	160Lm	4000K	24V AC/DC 50/60 Hz	100°	150mA	≥0,50	130x130	800	1/6	€ 65,00
PAVIC4L-0513030	5W	15W	160Lm	3000K	24V AC/DC 50/60 Hz	100°	150mA	≥0,50	130x130	800	1/6	€ 65,00
PAVIC4L-0513040	5W	15W	160Lm	4000K	24V AC/DC 50/60 Hz	100°	150mA	≥0,50	130x130	800	1/6	€ 65,00



ACCESSORIES:

3-WAY BOX JUNCTION CONNECTOR
2-WAY LINEAR JUNCTION CONNECTOR (13A)
2-WAY LINEAR JUNCTION CONNECTOR (24A)
3-WAY T-SHAPE JUNCTION CONNECTOR
DRIVER 230V-24VAC IP-68

Cod. CNB Pag. 307
Cod. CND15 Pag. 307
Cod. CND25 Pag. 307
Cod. CNT Pag. 307
Cod. DR60 / DR80 Pag. 307



**Polycarbonate
counter case
included**





Reliable and long-lasting. Inside diecast aluminium body stands a quality lighting that guarantees high energy savings.



OUTDOOR

WALL AND CEILING

PRIMA 45 · HORA · HERA

OUTDOOR - WALL AND CEILING

PRIMA 45



ADVANTAGES

Die cast aluminium body with epoxy powders coating. Ceiling or wall mounting, stainless screws. Energy savings of 82%.

Characteristics

RA	25.000	on off	-82%	I	IP65	IK10	F
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Ideal for entrances, terraces, arcades and gardens.

IK10 - DIECAST ALUMINIUM IMPACTS RESISTANT

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxxH mm	Weight gr	Packing pcs	Price
PR-081740	8W	45W	600Lm	4000K	230V/AC 50/60 Hz	120°	46mA	≥0,70	174x112x76	330	1/6	€ 13,90

OUTDOOR - WALL AND CEILING HORA - HERA



HO

HE

ADVANTAGES

Die cast aluminium body with epoxy powders coating. Ceiling or wall mounting, screw-cover caps. Energy savings of 80%.

Characteristics

RA	30.000	on off	-80%	I	IP65	IK10	F
CRI>85	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Ideal for entrances, terraces, arcades and gardens.

IK10 - DIECAST ALUMINIUM IMPACTS RESISTANT

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
HO-122230	12W	60W	810Lm	3000K	220-240V/AC 50/60 Hz	120°	57mA	≥0,90	220x140x65	980	1/12	€ 36,00
HE-121830	12W	60W	810Lm	3000K	220-240V/AC 50/60 Hz	120°	65mA	≥0,90	182x65	1100	1/12	€ 36,00
HE-242230	24W	100W	1550Lm	3000K	220-240V/AC 50/60 Hz	120°	85mA	≥0,90	220x80	1510	1/8	€ 48,00



OUTDOOR

ACCESSORIES

DRIVER · CONNECTORS

DRIVER 230V-24VAC IP68



DR60 60W
INPUT: 230VAC 50/60HZ
OUTPUT: 24VAC 2500MA

DR80 80W
INPUT: 230VAC 50/60HZ
OUTPUT: 24VAC 3334MA



Insulation
class

Product code	Packing pcs	Price
DR60	1/10	€ 39,90
DR80	1/10	€ 59,00

CONNECTORS

3-WAY BOX JUNCTION CONNECTOR



IP68

Max voltage: 450V 24A
Suitable for cables from Ø 4mm to Ø 12mm
Section mm² : 3x2,5

Product code	Packing pcs	Price
CNB	1/10	€ 11,90

3-WAY T-SHAPE JUNCTION CONNECTOR



IP68

Max voltage: 450V 24A
Suitable for cables from Ø 4mm to Ø 12mm
Section mm² : 3x1,5

Product code	Packing pcs	Price
CNT	1/10	€ 9,50

2-WAY LINEAR JUNCTION CONNECTOR



IP68

Max voltage: 450V 13A
Suitable for cables from Ø 4mm to Ø 10mm
Section mm² : 3x1,5

Product code	Packing pcs	Price
CND15	1/10	€ 5,90

2-WAY LINEAR JUNCTION CONNECTOR



IP68


Max voltage: 450V 24A
Suitable for cables from Ø 4mm to Ø 12mm
Section mm² : 3x2,5

Product code	Packing pcs	Price
CND25	1/10	€ 6,90



VERSATILE

Simplicity and handiness at the service of environments. From the narrowest interior spaces to the darkest exterior ones. Everything has its right LED solution.

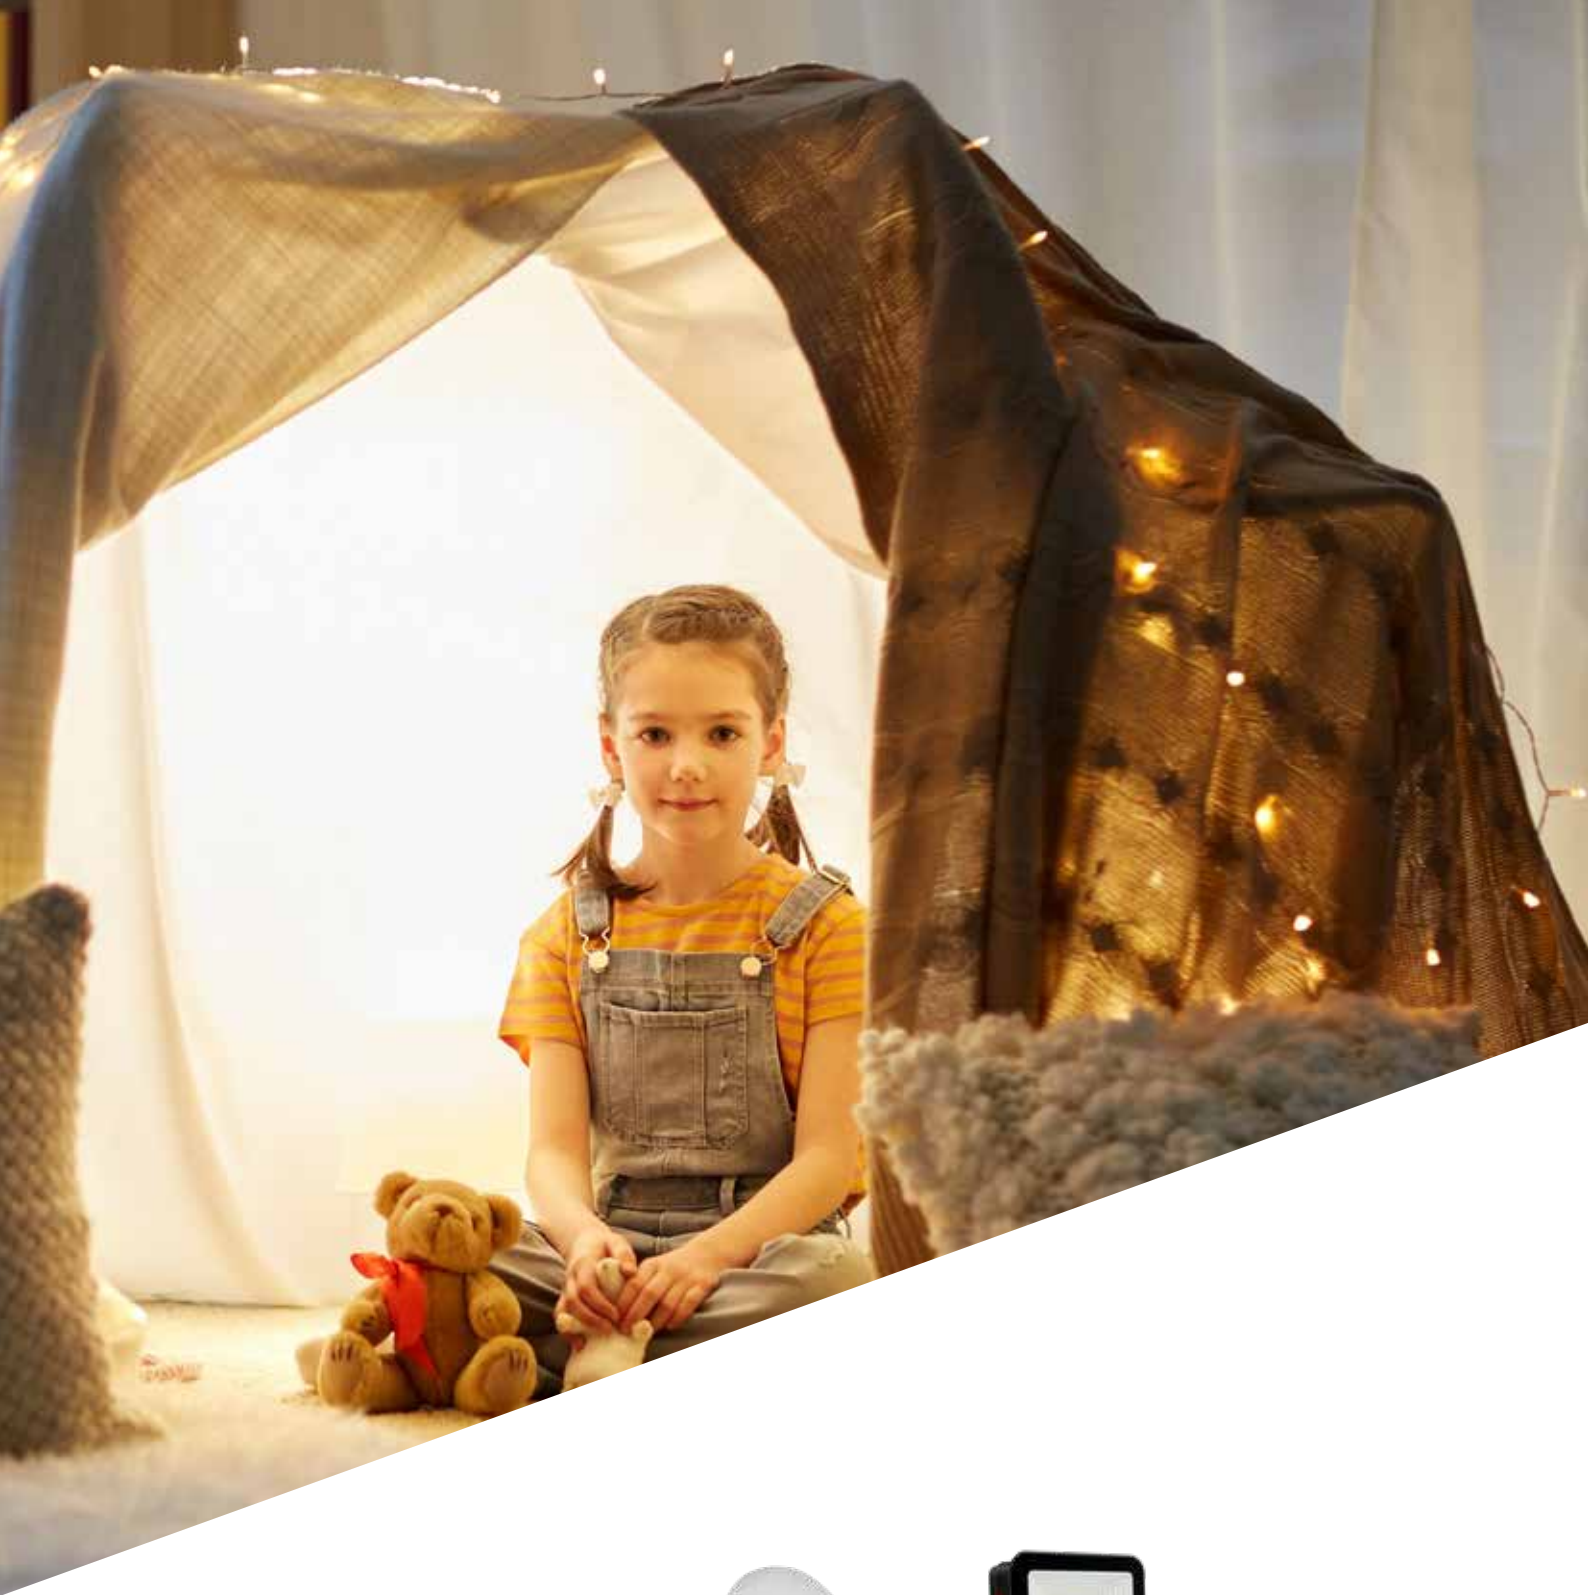

CABINET · NIGHT · HOBBY



Lighting enclosed spaces – such as closets, storage rooms and pantries – have never been easier thanks to versatile, compact and practical battery lamps.



VERSATILE
CABINET

TERRY · NEMO · ITALO · SOLIDEA

VERSATILE - CABINET

TERRY - NEMO - ITALO



4 X 1.5V AAA BATTERIES (not included)
with **STRONG ADHESIVE / MAGNET / SCREWS**

TRY

4 X 1.5V AAA BATTERIES (not included)
WITH **MAGNETE**

NE

3 X 1.5V AAA BATTERIES (not included)
with **STRONG ADHESIVE**

ITO

ADVANTAGES

You can place them everywhere because they don't need electric connection. Maximum battery life 10h.

Characteristics



CRI>80

Lifetime
(hours)

≥15.000
Switches

Degree of
protection

APPLICATIONS

Great solution for closet, pantry, entrance, wherever you need a small light source.

Product code	Watt	Equiva-lent	Lumen	Light colour	Angle	Dimensions Øxh mm	Weight gr	Packing pcs	Price
TRY-030040	3W	15W	150Lm	4000K	120°	98x24	70	12/24	€ 6,90
NE-030040	3W	15W	120Lm	4000K	120°	81x78x20	70	12/24	€ 8,50
ITO-030040	3W	20W	200Lm	4000K	120°	114x76x20	80	12/24	€ 6,90

The products are packed in blister



VERSATILE - CABINET SOLIDEA

2 YEARS
WARRANTY



ADVANTAGES

LED cabinet light with built-in motion sensor. Detection distance: 0-3 m; Detection angle: 90 degrees; automatic shutdown: 25 seconds.

Characteristics

RA	30.000	on off	IP20
CRI>80	Lifetime (hours)	≥15.000 Switches	Degree of protection

APPLICATIONS

Great solution for closet, pantry, entrance, wherever a small light source is needed.

3 X 1.5V AAA BATTERIES (not included)


Product code	Watt	Equiva- lent	Lumen	Light colour	Angle	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
SLDS-042240	0,4W	-	40Lm	4000K	120°	220x56x31	163	6/24	€ 13,90

The products are packed in blister

You can place this product wherever you want because it works with batteries and doesn't need to be connected to the power grid.

THREE MODES:

OFF mode, constant light (ON), and motion sensor (S).





VERSATILI **NIGHT**

MOUSE · TOMMY

Useful devices that produce soft and natural light and have a built-in twilight sensor. Connected directly to the electrical socket, at sunrise they automatically turn off and save energy.

VERSATILE - NIGHT MOUSE - TOMMY

2 YEARS
WARRANTY



MS

TMY

ADVANTAGES

A great way to save energy: automatic night-time switching on and automatic daytime shutdown. Available with natural light colour temperature.

Characteristics

RA	30.000	on off	IP20	A
CRI>80	Lifetime (hours)	≥15.000 Switches	Degree of protection	Energetic class

APPLICATIONS

Great solution for closet, pantry, entrance, wherever you need a small light source.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Dimensions LxHx mm	Weight gr	Packing pcs	Price
MS-066040	0,6W	-	50Lm	4000K	220-240V/AC 50/60 Hz	120°	52x113x58	47	10/50	€ 5,50
TMY-062540	0,6W	-	30Lm	4000K	220-240V/AC 50/60 Hz	120°	66x100x73	42	10/50	€ 5,50



BUILT-IN TWILIGHT SENSOR

Automatic night switch-on

Automatic daytime switch-off

The products are
packed in blister





Light can be taken anywhere with products designed for hobbies. Whether it's mountain, camping, fishing or DIY there's always a LED solution.



VERSATILE
HOBBY

SALLY · FUNNY · PENNY · SAFETY CAR

NEW

VERSATILE - HOBBY

SALLY - PENNY - FUNNY

2 YEARS
WARRANTY



SLY



PNY



FNY

ADVANTAGES

Simplicity of use, essential lines and great handling. Ideal lighting solutions for work or private use. It ensures maximum comfort and functional lighting.

Characteristics

RA	30.000	on off	IP20
CRI>80	Lifetime (hours)	≥15.000 Switches	Degree of protection

APPLICATIONS

Ideal for workshops, camping, hunting, fishing and emergency lighting for cars or houses.

Provided in blister with practical display boxes

Product code	Watt	Equiva-lent	Lumen	Light colour	Batteries	Battery life	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW SLY-030040	3W	15W	130Lm	4000K	3 AA 1,5V	10H	214x56x47	160	12 / 48	€ 11,90
NEW PNY-030040	3W	20W	200Lm	4000K	3 AAA 1,5V	10H	160x15x32	32	12 / 48	€ 6,90
NEW FNY-020040	2W	10W	110Lm	4000K	3 AAA 1,5V	10H	96x60x36	80	12 / 48	€ 6,90

SALLY



with hook and magnet



double spot light

FUNNY



with hook and magnet



double spot light

PENNY



VERSATILE - HOBBY SAFETY CAR



DOUBLE FUNCTION

- RECHARGEABLE
WITH USB CABLE SUPPLIED

- BATTERY CHARGER
FOR ELECTRONIC DEVICES

EMERGENCY LIGHT

FLASHING MODE (RED)



ADVANTAGES

Portable LED light with three levels of lighting: high intensity, low intensity and flashing. Aluminium structure with adjustable bracket up to 180 degrees. Equipped with a 3.7VDC lithium battery (1-year warranty). Battery life up to 10h with charging time of 6-8h. Rechargeable from power grid or cigarette lighters. Power Bank function: you can charge your devices via USB port.

APPLICATIONS

Designed for construction, camping, hunting, fishing and emergency lighting for cars or houses.

Characteristics

RA	35.000	on off	-86%	III	IP44	LED	IK05
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

BATTERY LIFE : 600Lm /5h • 300Lm /10h • SOS LIGHT/20h

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
SFC-100040	10W	70W	600Lm	4000K	3,7 V/DC Li-ion	120°	5400mA	-	98x26x155	435	1/20	€ 45,00



12VDC USB CAR CHARGER
Output voltage 5.0 VDC 1.0 A



230VAC USB wall charger
Output voltage 5.0 VDC 1.0 A

WHAT IS INCLUDED
HARD CASE
MICRO USB CABLE
USB CAR CHARGER
USB WALL CHARGER



FLOODLIGHTS

Resistance, power, reliability and professionalism. These are the characteristics that our LED floodlights have in common: high performance at consumer's service. From 10 to 1,000 Watt, from 650 to 165,000 Lumens.



PORTABLE · FLOODLIGHTS · SPORT · ACCESSORIES



Small size, great lighting. High-strength and long-lasting solutions to provide portable light at any time and situation.



FLOODLIGHTS

PORTABLE

MINI WORK · SIRIO WORK · CENTURY WORK ·
FREE WORK · REWORK · FOCUS

SERIE WORK



www.century-italia.com

LED floodlight

Exclusive design

The wide range includes **floodlights for construction sites and work areas**, but also for camping, hunting, fishing and all outdoor activities.

BATTERY POWERED



Mini Work
6 AAA batteries



Sirio Work
Rechargeable



Free Work
Rechargeable



Free Work
10 or 20 W



Century Work
13 or 32 W



ReWork
From 30 to 100 W

Do you need to connect to the power grid?

No! Choose products with rechargeable battery to have up to **8hours of continuous light**.

Great versatility

You can take light anywhere, thanks to the portability of these models. Some of them work also as a power bank.



High power

Don't give up power: Choose Rework 100W or Focus 80W to have **up to 8000 Lumens**.

FLOODLIGHTS - PORTABLE

MINI WORK



ADVANTAGES

ABS structure with rubber side reinforcements for shock resistance. It is perfect when practical and portable lighting is needed. Power 6 x 1.5V AAA batteries (not included). Maximum battery life 10h.

Characteristics

RA	30.000	on off	IP44
CRI>80	Lifetime (hours)	≥15.000 Switches	Degree of protection


APPLICATIONS

Designed for camping, hunting, fishing, generic lighting for places far from electricity grid.

BATTERY LIFE • 700Lm /10h • 350Lm /20h

Product code	Watt	Equiva- lent	Lumen	Light colour	Batteries	Angle	Dimensions Øxh mm	Weight gr	Packing pcs	Price
MW-108040	10W	-	700Lm	4000K	6 AAA 1,5V	90°	175x153x32	242	1/20	€ 23,90

The products are packed in blister



6 x 1.5V AAA BATTERIES
(not included)



FLOODLIGHTS - PORTABLE SIRIO WORK

CENTURY WORK



Complete with
schuko plug and
3-meter cable
(H07RN-F)

Lithium Battery
7W 5h / 15W 3h

BIWATT
7W 15W
750Lm 1500Lm

SRW

CW

ADVANTAGES

SRW Die cast aluminium body, equipped with a Lithium battery from 7.4V to 4400 mA. Battery life 3-5h, charging time 5h.

CW Die cast aluminium body and metal structure with ergonomic grip that guarantees maximum handling.

Characteristics

RA	30.000	on off	-90%	III	IP42	LED	IK05
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Ideal for construction sites, campsites, emergency lighting for cars and houses. Also suitable for hunting and fishing trips.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
SRW-158540	15W	200W ALO	1500Lm	4000K	230V/AC - 12/24V/DC 50/60 Hz	120°	-mA	≥0,50	213x191x132	930	1/4	€ 85,00
CW-139540	13W	100W ALO	1000Lm	4000K	195-265V/AC 50/60 Hz	120°	70mA	≥0,90	190x155x110	520	1/4	€ 32,00
CW-329540	32W	300W ALO	3000Lm	4000K	195-265V/AC 50/60 Hz	120°	175mA	≥0,90	300x265x196	1883	1/4	€ 59,00

SRW



*Wall charger 230VAC
Output voltage 8.7VDC 2A



**Car charger 12/24VD
Output voltage 8.4VDC 800mA

FLOODLIGHTS - PORTABLE FREE WORK

2 YEARS
WARRANTY



IP65

FRW

IP44

FRWR
RECHARGEABLE

BATTERY LIFE

- **10W** 650LM / 4H 325LM / 8H
- **20W** 1300LM / 4H 650LM / 8H

ADVANTAGES

Easy to handle, it comes in two versions: with schuko plug and a 2m long cable; rechargeable with a 3.7VDC Lithium battery. Charging time 6-h.

Characteristics

RA	35.000	on off	-90%	I	LED	IK05
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Energetic class	Impact protection

APPLICATIONS

Designed for construction sites, camping, hunting, fishing, emergency lighting for cars or houses.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
FRW-100040	10W	100W ALO	750Lm	4000K	100-240V/AC 50/60 Hz	120°	165mA	≥0,50	180x36x225	888	1/20	€ 33,00
FRWR-100040	10W	75W ALO	650Lm	4000K	3,7 V/DC Li-ion	120°	3600mA	-	180x36x224	703	1/20	€ 55,90
FRW-200040	20W	200W ALO	1500Lm	4000K	100-240V/AC 50/60 Hz	120°	300mA	> 0,50	210x38x280	1270	1/10	€ 45,00
FRWR-200040	20W	150W ALO	1300Lm	4000K	3,7 V/DC Li-ion	120°	5400mA	-	210x38x280	1220	1/10	€ 84,00

INCLUDED

MICRO USB CABLE



230VAC WALL CHARGER

Output voltage 5.0 VDC 1.0 A



ADJUSTABLE UP TO 340 DEGREES (BOTH THE MODELS)



FLOODLIGHTS - PORTABLE REWORK



ADVANTAGES

Die cast aluminium body with epoxy powder coating, equipped with schuko plug and 1.5m cable.


Characteristics

RA	25.000	on off	-90%	I	IP65	LED	IK05
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Designed for construction sites, gardens, garages and workshops.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
RW-308540	30W	300W ALO	2700Lm	4000K	230V/AC 50/60 Hz	120°	130mA	≥0,95	253x170x250	1300	1/4	€ 39,90
RW-508540	50W	400W ALO	4400Lm	4000K	230V/AC 50/60 Hz	120°	210mA	≥0,95	292x180x280	1640	1/4	€ 54,90
RW-708540	70W	600W ALO	6000Lm	4000K	230V/AC 50/60 Hz	120°	300mA	≥0,95	340x190x370	2170	1/4	€ 79,00
RW-1008540	100W	800W ALO	8000Lm	4000K	230V/AC 50/60 Hz	120°	430mA	≥0,95	392x220x430	3000	1/4	€ 99,00

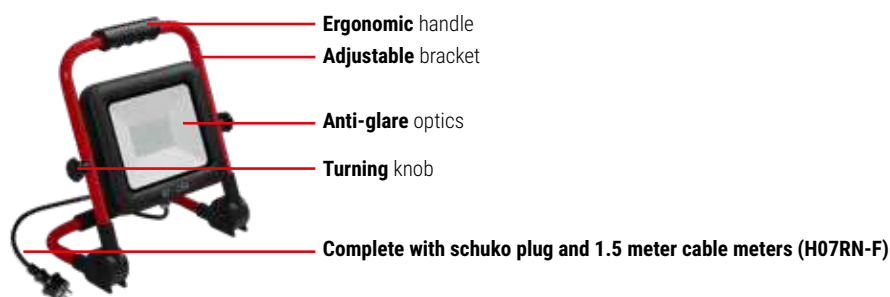

FLOODLIGHTS - PORTABLE FOCUS



FCRF

- Provided with 7.4V Lithium battery
- Battery life : 2.5h. Charging time 6-7h



FCR

- Provided with 11.1V Lithium battery
- Battery life : 2.5h. Charging time 7-8h

ADVANTAGES

Portable battery LED floodlights that can be recharged by electric grid or cigarette lighters. Battery life about 2.5h.

Characteristics

RA	30.000	on off	-90%	III	IP54	LED	IK08
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Designed for construction sites, gardens, garages and workshops.


Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Dimensions LxHx mm	Weight gr	Packing pcs	Price
FCRF-209540	20W	200W ALO	1400Lm	4000K	230V/AC - 12V/DC 50/60 Hz	110°	258x83x320	1750	1/6	€122,00
FCR-309540	30W	300W ALO	2200Lm	4000K	230V/AC - 12V/DC 50/60 Hz	110°	295x112x342	3300	1/4	€185,00

ACCESSORIES

Product code	Description	Price
RBFCRF20	Battery Replacement FCRF	€ 32,00
RBFCR30	Battery Replacement FCR	€ 54,00
RADFC	Battery Replacement	€ 16,50



Shock-resi-
stant rubber
protection



Adjustable bracket



Anti-glare
optics



ON/OFF Power
button



Ergonomic
handle



Wall outlet 230VAC and
cigarette lighter 12VDC

FLOODLIGHTS - PORTABLE FOCUS



FC 30



FC 50/80

ADVANTAGES

Portable LED floodlight powered by electric grid equipped with wired 3m neoprene cable with 2P-T16A molded plug. The 30W model comes with a 2P-T16A service socket on the back, the 50W and 80W have two 2P-T16A sockets on the back.

Characteristics

RA	30.000	on off	-90%	I	IP54	LED	IK08
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Designed for construction sites, gardens, garages and workshops.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
FC-309540	30W	300W ALO	2800Lm	4000K	220-240V/AC 50/60 Hz	110°	131mA	≥0,90	200x115x258	1400	1/6	€ 76,00
FC-509540	50W	400W ALO	5000Lm	4000K	220-240V/AC 50/60 Hz	110°	217mA	≥0,90	295x112x342	3600	1/4	€ 149,00
FC-809540	80W	700W ALO	8000Lm	4000K	220-240V/AC 50/60 Hz	110°	348mA	≥0,90	295x112x342	3600	1/4	€ 169,00



3 meter neoprene cable
H07RN-F and schuko plug
2P+T16A



1 service schuko
socket 2P+T 16A 220V IP54



3 meter neoprene cable
H07RN-F and schuko plug
2P+T16A



2 service schuko
sockets 2P+T 16A 220V IP54



Each model has been carefully designed to fulfil its task: different materials used, different powers, different features. All choices for a single purpose: offer the maximum professionalism and performance.



FLOODLIGHTS

FLOODLIGHTS

HORIENTA12 · HORIENTA20 · HORIENTA PLUS · I-FLAT
SHUTTLE SLIM · SIRIO PLUS · SIRIO SLIM · PORTEO · HERMES
Dmemory Advance · Dmemory Advance Slim

FLOODLIGHTS

HORIENTA12



ADVANTAGES

Die cast aluminium fin heatsink, PC optics with no-glare lenses.
UV-resistant ABS bracket with 320-degree rotation. For ceiling and wall application.

Characteristics

RA	30.000	on off	-84%		IP54	IK03	
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

APPLICATIONS

Great solution for conference room, living room, office, parking, porches.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxIxxH mm	Weight gr	Packing pcs	Price
HO-129540	12W	75W	830Lm	4000K	220-240V/AC 50/60 Hz	90°	100mA	≥0,50	224x44x103	388	1/12	€ 43,00



320° ROTATION

FLOODLIGHTS

HORIENTA20



PIR sensor



Twilight sensor

ADVANTAGES

Body and sensor in UV resistant ABS. Orientable head with die cast aluminium fin heatsink. Presence sensor and built-in twilight switch. Transparent PC cover. Energy savings of 90%.

Characteristics

RA	30.000	on off	-90%		IP44	LED	IK03
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Ideal for terraces, porches, gardens and outdoor applications under canopies.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
HOS-209540	20W	200W ALO	1700Lm	4000K	220-240V/AC 50/60 Hz	110°	88mA	≥0,90	187x81x215	665	1/12	€ 65,00

HOW THE SENSOR WORKS

The presence sensor is activated when motion is detected by choosing the following options:

SUN

Sensor is active day and night

NIGHT

Sensor is active from the twilight to the end of the night

TIME

Adjusting the switch-on period (10 ± 5 sec – 10 ± 2min)



Orientable head ± 80 degrees, made in aluminium with white finish. High heat dissipation thanks to finned structure.



Transparent PC optics for perfect light diffusion made of weather-resistant anti-aging material.



Body and sensor in ABS, white finish. Anti-aging material, resistant to weathering.

FLOODLIGHTS

HORIENTA PLUS



ADVANTAGES

Orientable head with double joint, full opal diffuser. Energy savings of 90%.

Characteristics


RA	25.000	on off	-90%	I	IP65	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for terraces, porches, gardens and outdoor applications under canopies.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
HOP-208540	20W	200W	1600Lm	4000K	220-240V/AC 50/60 Hz	120°	87mA	≥0,90	108x162x55	346	5/20	€ 21,00
HOP-308540	30W	300W	2400Lm	4000K	220-240V/AC 50/60 Hz	120°	129mA	≥0,90	130x181x71	597	5/10	€ 31,00
HOP-508540	50W	400W	4000Lm	4000K	220-240V/AC 50/60 Hz	120°	225mA	≥0,90	163x223x78	976	5/10	€ 47,00

MULTIDIRECTION ADJUSTABLE BRACKET

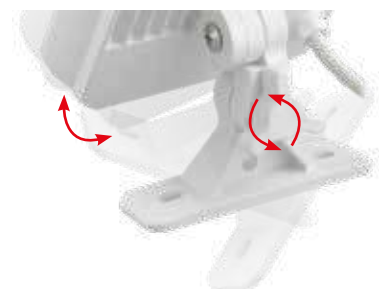

FLOODLIGHTS I-FLAT

PRO
LINE



ADVANTAGES

Die cast aluminium body, tempered glass, high performance chrome reflector. Warm temperature light to create a cosy atmosphere.

Characteristics

RA	30.000	on off	-87%	I	IP65	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for terraces, porches and gardens.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
IFL-109530	10W	75W ALO	800Lm	3000K	195-265V/AC 50/60 Hz	120°	75mA	≥0,50	150x26x130	485	6/24	€ 16,50
IFL-209530	20W	150W ALO	1600Lm	3000K	195-265V/AC 50/60 Hz	120°	100mA	≥0,90	207x32x170	550	6/12	€ 21,00
IFL-309530	30W	250W ALO	2400Lm	3000K	195-265V/AC 50/60 Hz	120°	150mA	≥0,90	210x32x180	600	6/12	€ 31,00



FLOODLIGHTS SHUTTLE SLIM

PRO
LINE

2 YEARS
WARRANTY



SHSLIM

SHSLIS



PIR sensor



Twilight
sensor

ADVANTAGES

Ultra-flat design, heavy aluminium body, tempered glass. The SHSLIS version is equipped with an automatic switching PIR sensor: it turns on at nightfall and, when a presence is detected, it sets the maximum light intensity for an adjustable time (30 sec - 10 min) and then turn off.

Characteristics

RA	30.000	on off	-90%	I	IP65	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for porches, terraces, parking lots, professional use, industrial areas, building facades and general lighting of outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHxW mm	Weight gr	Packing pcs	Price
SHSLIM-109540	10W	100W ALO	720Lm	4000K	195-265V/AC 50/60 Hz	120°	45mA	≥0,90	95x32x76	191	1/24	€ 12,90
SHSLIS-109540	10W	100W ALO	720Lm	4000K	195-265V/AC 50/60 Hz	120°	50mA	≥0,90	120x49x95	354	1/12	€ 28,90
SHSLIM-209540	20W	200W ALO	1400Lm	4000K	195-265V/AC 50/60 Hz	120°	76mA	≥0,90	120x32x95	238	1/24	€ 16,90
SHSLIS-209540	20W	200W ALO	1400Lm	4000K	195-265V/AC 50/60 Hz	120°	90mA	≥0,90	142x48x102	364	1/12	€ 32,90
SHSLIM-309540	30W	300W ALO	2240Lm	4000K	195-265V/AC 50/60 Hz	120°	133mA	≥0,90	150x38x120	490	1/12	€ 23,90
SHSLIS-309540	30W	300W ALO	2240Lm	4000K	195-265V/AC 50/60 Hz	120°	130mA	≥0,90	150x59x120	469	1/6	€ 39,90
SHSLIM-509540	50W	400W ALO	3450Lm	4000K	195-265V/AC 50/60 Hz	120°	226mA	≥0,90	188x38x145	600	1/6	€ 35,90
SHSLIS-509540	50W	400W ALO	3450Lm	4000K	195-265V/AC 50/60 Hz	120°	226mA	≥0,90	188x59x145	827	1/6	€ 49,00



SHSLIS

You can adjust:

- Twilight sensor sensitivity (3-2000 Lux)
- The duration of the switch-on period (30 sec - 10 min)

FLOODLIGHTS SHUTTLE SLIM

PRO
LINE



SHSOL



PIR sensor



Photovoltaic
panel

SHSOLS

ADVANTAGES

Ultra-flat design, heavy aluminium body with a 3.7V Lithium battery. It charges in 4-6h with a battery life of 12-16h. It has a PIR sensor with a 120-degree detection angle and a 3-5m range of action. Equipped with solar photovoltaic panel, with high energy efficiency conversion.

Characteristics

RA	30.000	on off	-100%	III	IP65	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for porches, terraces, parking lots, professional use, industrial areas, building facades and general lighting of outdoor areas.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
SHSOL-109540	10W	100W ALO	1000Lm	4000K	3,7 V/DC	120°	6600mA	≥0,90	206x198x195	1188	1/8	€ 165,00
SHSOLS-109540	10W	100W ALO	1000Lm	4000K	3,7 V/DC	120°	6600mA	≥0,90	150x80x189	1560	1/8	€ 165,00

FLOODLIGHTS

SIRIO PLUS



ADVANTAGES

Anti-aging PC body, high performance reflector. Opal anti-glare glass, high dissipating aluminium heatsink.

Characteristics

RA	30.000	on off	-88%	I	IP65	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Great solution for storefronts, arcades, shops, monuments, billboards, churches, museums, villas and terraces.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxIhx mm	Weight gr	Packing pcs	Price
SRPB-509530	50W	400W ALO	5000Lm	3000K	180-240V/AC 50/60 Hz	120°	250mA	≥0,90	220x79x214	1086	1/5	€ 45,00

FLOODLIGHTS

SIRIO PLUS

Special

3 YEARS
WARRANTY



SRP
Low voltage



SRPR
RGB



Multifunction
remote control

ADVANTAGES

Anti-aging PC body, high performance reflector. Opal anti-glare glass, high dissipating aluminium heatsink.

Characteristics

RA	30.000	on off	I	IP65	LED
CRI>80	Lifetime (hours)	≥15.000 Switches	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Great solution for storefronts, arcades, shops, monuments, billboards, churches, museums, villas and terraces.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
SRP-102840	10W	100W ALO	780Lm	4000K	10-28V/DC	120°	1000mA	-	122x52x144	403	1/16	€ 39,90
SRPR-109510	10W	-	-	RGB	85-265V/AC 50/60 Hz	120°	51mA	≥0,90	122x52x144	490	1/16	€ 39,90



SELV (SRP)
(safety extra-low voltage)
Ideal for video surveillance and safety systems with photovoltaic panels, for boats, for construction and rescue vehicles.



SRP

Low power
voltage

10-28V/DC



SIRIO SLIM: *light like you have always desired*

LED floodlights ideal for illuminating outdoors, thanks to the **high resistance to the weather**. The aluminium structure stands out not only for its strength, but also for its extremely small thickness: only 29 mm. **The range is wide:** from 20 W to 200 W.

NEW

FLOODLIGHTS

SIRIO SLIM

2 YEARS
WARRANTY



Only 29mm
thick

ADVANTAGES

Resistant and ultra slim aluminium structure, only 29 mm thick. The IP66 protection makes it fully protected against dust and water.

Characteristics

RA	35.000	on off	-90%	IP66	A+	IK08
CRI>75	Lifetime (hours)	≥50.000 Switches	Savings	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Ideal for museums, terraces, arcades, shop windows, shops, shopping malls, public gardens, industrial sheds.

UP TO 200W 18000 lm

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW SRS-209540	20W	200W ALO	1800Lm	4000K	220-240VAC 50/60 Hz	110°	120mA	≥0,95	147x160x28	480	1/24	€ 24,00
NEW SRS-309540	30W	300W ALO	2700Lm	4000K	220-240VAC 50/60 Hz	110°	180mA	≥0,95	147x160x28	480	1/24	€ 28,00
NEW SRS-509540	50W	400W ALO	4500Lm	4000K	220-240VAC 50/60 Hz	110°	300mA	≥0,95	178x200x28	850	1/20	€ 31,00
NEW SRS-709540	70W	600W ALO	6300Lm	4000K	220-240VAC 50/60 Hz	110°	420mA	≥0,95	230x270x28	1450	1/12	€ 55,00
NEW SRS-1009540	100W	800W ALO	9000Lm	4000K	220-240VAC 50/60 Hz	110°	600mA	≥0,95	230x270x28	1450	1/12	€ 95,00
NEW SRS-1509540	150W	1000W ALO	13500Lm	4000K	220-240VAC 50/60 Hz	110°	900mA	≥0,95	303x366x34	2550	1/6	€ 118,00
NEW SRS-2009540	200W	1500W ALO	18000Lm	4000K	220-240VAC 50/60 Hz	110°	1200mA	≥0,95	303x366x34	2550	1/6	€ 129,00

NEW

FLOODLIGHTS PORTEO

2 YEARS
WARRANTY



ADVANTAGES

Compact water and dust-resistant floodlight with a prismatic diffuser and a rear door that allows a more practical installation.

Characteristics

RA	25.000	on off	-90%	I	IP65
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation	Degree of protection

APPLICATIONS

Ideal for museums, terraces, arcades, shop windows, shops, shopping malls, public gardens, industrial sheds.

UP TO 4000 lm

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
NEW PTO-209540	20W	200W ALO	1600Lm	4000K	220-240V 50/60 Hz	120°	97mA	≥0,80	165x145x35	500	1/24	€ 23,00
NEW PTO-309540	30W	300W ALO	2400Lm	4000K	220-240V 50/60 Hz	120°	135mA	≥0,80	206x188x37	800	1/24	€ 29,00
NEW PTO-509540	50W	400W ALO	4000Lm	4000K	220-240V 50/60 Hz	120°	230mA	≥0,80	236x210x38	1030	1/24	€ 33,00



Easy wiring with junction box

NEW

FLOODLIGHTS HERMES



HMSB



HMS

ADVANTAGES

Ultra-thin High-performance LED floodlight with a modern design. Protected by dust, water and shock (2J), it features an elegant prismatic diffuser.

Characteristics

RA	30.000	on off	-88%	I	IP65	IK07
CRI>80	Lifetime (hours)	≥15.000 Switches	Savings	Insulation	Degree of protection	Impact protection


APPLICATIONS

Ideal for museums, terraces, arcades, shop windows, shops, shopping malls, public gardens, industrial sheds.

UP TO 20000 lm

Also available in white finish and light colour 3000K in 70W and 100W wattages

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
NEW HMS-709540	70W	600W ALO	7000Lm	4000K	100-265V 50/60 Hz	120°	320mA	≥0,65	200x230x34	1800	1/4	€ 59,00
NEW HMSB-709530	70W	600W ALO	7000Lm	3000K	100-265V 50/60 Hz	120°	320mA	≥0,65	200x230x34	1800	1/4	€ 59,00
NEW HMS-1009540	100W	800W ALO	10000Lm	4000K	100-265V 50/60 Hz	120°	360mA	≥0,65	270x300x39	2400	1/1	€ 105,00
NEW HMSB-1009530	100W	800W ALO	10000Lm	3000K	100-265V 50/60 Hz	120°	360mA	≥0,65	270x300x39	2400	1/1	€ 105,00
NEW HMS-1509540	150W	1000W ALO	15000Lm	4000K	100-265V 50/60 Hz	120°	750mA	≥0,65	290x330x43	2900	1/1	€ 130,00
NEW HMS-2009540	200W	1500W ALO	20000Lm	4000K	100-265V 50/60 Hz	120°	890mA	≥0,65	340x360x48	4200	1/1	€ 165,00



PRISMATIC
DIFFUSER





IP65

IP65

CLASS I

1m silicone connection cable included



KEY FEATURES

- 1060 diecast aluminium body with Heat Pipe dissipating technology
- Maximum corrosion resistance, cataphoresis coating
- 3 mm thick tempered glass
- Pure aluminium reflector
- Stainless steel parts

**PRO
LINE**

MORY ADVANCE



Bidirectional heat dissipation.
Patented technology: knurled fins.



Special anti-fog breathing valve.



Special 1060 aluminium body.
Epoxy powder coating with cataphoresis process
for maximum corrosion resistance.



High-performance drivers



Wide angle for bracket adjustment.



Stainless steel screws.



Patented HDT Technology.



Higher heat dissipation through copper profile
(Heat-Pipe).



Use

- Shop windows • Arcades • Monuments • Churches • Museums
- Villas • Terraces • Parkings • Shopping Centres • Public Gardens
- Outdoor Areas • Industrial Sheds



DMAB



DMA

ADVANTAGES

1060 aluminium body with Heat-Pipe dissipating technology. Maximum corrosion resistance, cataphoresis coating. Aluminium reflector and stainless-steel parts.

Characteristics

RA	40,000	on off	-90%	I	IP65	LED
CRI>80	Lifetime (hours)	≥20.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for museums, terraces, arcades, shop windows, shops, shopping malls, public gardens, industrial sheds.

Product code	Watt	Equivalent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxHx mm	Weight gr	Packing pcs	Price
DMA-109540	10W	100W ALO	980Lm	4000K	195-265V/AC 50/60 Hz	120°	51mA	≥0,95	132x53x158	800	1/10	€ 22,00
DMAB-109530	10W	100W ALO	980Lm	3000K	195-265V/AC 50/60 Hz	120°	51mA	≥0,95	132x53x158	800	1/10	€ 22,00
DMA-309540	30W	300W ALO	3150Lm	4000K	195-265V/AC 50/60 Hz	120°	150mA	≥0,95	191x63x219	1400	1/4	€ 59,00
DMA-509540	50W	400W ALO	5250Lm	4000K	195-265V/AC 50/60 Hz	120°	200mA	≥0,95	220x117x281	2900	1/4	€ 95,00
DMA-709540	70W	600W ALO	7350Lm	4000K	195-265V/AC 50/60 Hz	120°	300mA	≥0,95	220x117x281	2900	1/4	€ 139,00
DMA-1509540	150W	1000W ALO	15750Lm	4000K	195-265V/AC 50/60 Hz	120°	900mA	≥0,95	298x186x364	7200	1/1	€ 369,00
DMA-2009540	200W	1500W ALO	21000Lm	4000K	195-265V/AC 50/60 Hz	120°	1200mA	≥0,95	344x196x464	8400	1/1	€ 490,00

FLOODLIGHTS

Dmemory Advance Slim

PRO
LINE



ADVANTAGES

Cataphoresis coating, equipped with 1m silicone connection cable. Resistance to corrosion, pure aluminium reflector.

Characteristics

RA	50.000	on off	-88%	I	IP65	LED	IK08
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Ideal for porches, shop windows, shops, shopping malls, public gardens, industrial sheds.

ULTRATHIN BODY IN DIECAST ALUMINUM

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamp.	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
DMAS-1009540	100W	800W ALO	10500Lm	4000K	195-265V/AC 50/60 Hz	120°	650mA	≥0,95	417x63x340	4000	1	€ 155,00
DMAS-1509540	150W	1000W ALO	15750Lm	4000K	195-265V/AC 50/60 Hz	120°	1000mA	≥0,95	455x63x375	5500	1	€ 199,00
DMAS-2009540	200W	1500W ALO	21000Lm	4000K	195-265V/AC 50/60 Hz	120°	1300mA	≥0,95	400x63x500	6500	2	€ 289,00



Innovative lighting designed for sports facilities, arenas, but also for port and airport areas. Large spaces must be provided with lighting devices that have technology, performance and energy savings as their key features.



FLOODLIGHTS
SPORT

OPENTOP 180 · STADIO

STADIO

REVO



Up to 165,000 Lumen

TECHNOLOGY IMPROVES PERFORMANCE



NO INTERFERENCE

The circuit system works perfectly with other elements minimizing EMI (electromagnetic interference)



SOLID STATE DESIGN

Unique "SSD" design, simple and innovative. All components are strong and removable individually, which provides more durability for the LED chip.



POWER

Through advanced technology, photoelectric conversion is at maximum efficiency, which means energy savings and greater light output.



OPTICS

The LED plate is made with a compact, multi-faceted design that ensures uniformity to the light beam.



HEAT MANAGEMENT

The materials used and the high-efficiency sink guarantee protection from overheating and long life of the product.



EASY INSTALLATION

Adjustable bracket to direct the beam up to 240 degrees.

FLOODLIGHTS - SPORT

OPENTOP 180

PRO
LINE



ADVANTAGES

1060 aluminium body with built-in cooling fins. High-performance calibrated optics system, weather resistant, adjustable support brackets.

Characteristics

RA	35.000	on off	-88%	I	IP65	LED
CRI>70	Lifetime (hours)	≥20.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for industrial buildings, monuments, parks, gardens, bridges, sports facilities and lighthouse towers.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
OP-1803050	180W	1500W ALO	16200Lm	5000K	195-265V/AC 50/60 Hz	30°	810mA	≥0,95	571x280x155	7000	1	€ 449,00
OP-1806050	180W	1500W ALO	16200Lm	5000K	195-265V/AC 50/60 Hz	60°	810mA	≥0,95	571x280x155	7000	1	€ 449,00

FLOODLIGHTS - SPORT STADIO



ADVANTAGES

Average lifespan of up to 50,000 hours, advanced MULTICHIP LED technology. Pure aluminium body, maximum corrosion resistance.

Characteristics

RA	54,000	on off	-67%	I	IP65	LED
CRI>80	Lifetime (hours)	≥27.000 Switches	Savings	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Ideal for sports facilities, industrial buildings, workshops, warehouses, supermarkets, gyms, museums and petrol stations.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
STD-50013040	500W	-	65000Lm	4000K	100-277V/AC 50/60 Hz	120°	2170mA	≥0,98	363x480	15500	1/1	€ 1390,00

OTHER WATTAGES ON REQUEST

Product code	Watt	Lumen	Light colour	Volt/Hertz	Dimensions Øxh mm
STD-1250W	1250W	165000Lm	2700/6500K	100-277V/AC 50/60 Hz 200-480V/AC 50/60 Hz	533x582

ACCESSORIES

Product code	Type	Packing pcs	Price
STD500-LASER	Laser pointer	1/10	€ 132,00
STD500-LENS30	30-degree lens	1/1	€ 41,00
STD500-LENS45	45-degree lens	1/1	€ 41,00
STD500-LENS80	80-degree lens	1/1	€ 41,00





FLOODLIGHTS **ACCESSORIES**

STAND50 · TRIPOD160

Easy-to-use universal supports, designed to make LED floodlights able to illuminate in the best possible way.

STAND 50



ADVANTAGES

- Adjustable and universal floor support
- Metal frame with ergonomic handle
- Quick and easy installation

APPLICATIONS

Shipyards / Workshops / Warehouses

Product code	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
STAND50	295x190x350	850	1/5	€ 21,50

TRIPOD 160



ADVANTAGES

- Optimal security
- Suitable for 2 floodlights
- Load: 8-9kg

APPLICATIONS

Shipyards/Workshops/Warehouses/Party Lighting/Photo Sets

Product code	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
TRIPOD160	800x800 x1600	2100	1/6	€ 31,00



HIGH/LOW-BAY

Highly professional product lines, especially designed for lighting work spaces such as sheds, workshops, factories and warehouses, but also supermarkets and parking lots.



EXTREMA 150 · ACCESSORI EXTREMA · DISCOVERY · DISCOVERY SLIM

HIGH/LOW-BAY

EXTREMA 150

Dimmable

PRO
LINE

2 YEARS
WARRANTY



ADVANTAGES

Die cast aluminium body with high heat dissipation. Weather and shock resistant PC lens. Easy to install with 2 included suspension cables. Optional fixed mounting brackets. Dimmable with 1-10V system.

APPLICATIONS

Designed for indoor parking, warehouses and general lighting.

Characteristics

RA	50.000	on off	-63%	I	IP65	IK08	F
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Impact protection	Ok flammable surfaces

ALUMINIUM BODY

SUITABLE FOR PROLONGED USE WITHOUT LUMINOUS DECAY

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxh mm	Weight gr	Packing pcs	Price
EXTR-1501250	150W	400W JM	19500Lm	5000K	100-240V/AC 50/60 Hz	120°	900mA	≥0,93	102x1182x137	6900	1	€ 450,00

2-meter suspension kit included (2 pcs)



The 1-10 dimming system allows you to vary the amount of light emitted by a source by varying the voltage in the range from 1 to 10V (e.g. 1V minimum brightness, 5V 50%, 10V 100%). It can be controlled with any device that implements this voltage change.

EXTREMA ACCESSORIES

FIXED MOUNTING BRACKETS



Product code	Packing pcs	Price
EXTR-KIT	25	€ 21,00



±50° ADJUSTABLE MOUNTING BRACKETS



Product code	Packing pcs	Price
EXTR-ROTAB	25	€ 39,00



DAYLIGHT SENSOR




1 The device measures natural light and self-adjust its light intensity with the aim of always keeping the same amount of light in the room.

2 The device never goes off completely, even in sufficient environment light.

3 Users can turn off the device manually.


Product code	Packing pcs	Price
EXTR-SENS	25	€ 69,00

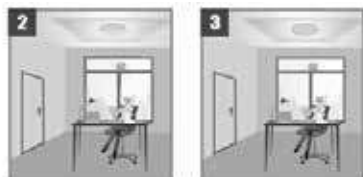

5 LENS KIT



Product code	Angle	Packing pcs	Price
EXTR-LENS3070	30°x70°	5/20	€ 72,00
EXTR-LENS6090	60°x90°	5/20	€ 72,00
EXTR-LENS40130	40°x130°	5/20	€ 72,00

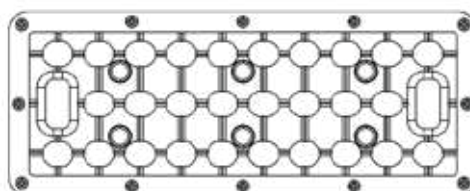

HIGH/LOW-BAY DISCOVERY

PRO
LINE

3 YEARS
WARRANTY



ADVANTAGES

Special optics with tempered glass that focuses the light flow. 1060 die cast aluminium body. Maximum corrosion resistance, cataphoresis coating.

Characteristics

RA	50.000	on off	-60%	I	IP65	LED	IK08
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Great solution for workshops, factories, warehouses, parking lots and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
DSC-10012040	100W	250W SAP	13200Lm	4000K	100-277V/AC 50/60 Hz	120°	1400mA	≥0,95	280x185	3700	1	€ 265,00

AVAILABLE SEPARATELY:



ALUMINIUM SHELL 90° AND 120°



LENS 70° AND 90°

Product code	Angle	Packing pcs	Price
DSC100-90S	90°	1	€ 36,00
DSC100-120S	120°	1	€ 36,00
DSC150-90S	60°	1	€ 36,00
DSC150-120S	90°	1	€ 36,00

Product code	Angle	Packing pcs	Price
DSC100-LENS60	60°	1	€ 36,00
DSC100-LENS90	90°	1	€ 36,00
DSC150-LENS60	60°	1	€ 36,00
DSC150-LENS90	90°	1	€ 36,00



• Special tempered glass optics that focuses the light flux in defined places

• 1060 Diecast aluminium body. Maximum corrosion resistance

• LED Provided by Nichia

• Suspension ring

• Heat dissipation fins that keep the operating temperature low

• Driver Provided by Meanwell

HIGH/LOW-BAY

DISCOVERY

Dimmable

**PRO
LINE****3 YEARS**
WARRANTY**ADVANTAGES**

Special optics with tempered glass that focuses the light flow. 1060 die cast aluminium body. Maximum corrosion resistance, cataphoresis coating. Dimmable with 1-10 V systems.

Characteristics

RA	50.000	on off	-63%	I	IP65	LED	IK08
CRI>80	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS


Great solution for workshops, factories, warehouses, parking lots and supermarkets.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
DSCD-15011040	150W	400W SAP	19800Lm	4000K	100-240V/AC 50/60 Hz	110°	1650mA	≥0,90	330x215	4200	1	€ 239,00
NEW DSCD-20011040	200W	+ 400W SAP	26400Lm	4000K	100-240V/AC 50/60 Hz	110°	1000mA	≥0,90	450x245	6200	1	€ 310,00

AVAILABLE SEPARATELY:

Protection Grid

Aluminium shell 120 degrees



Product code	Angle	Packing pcs	Price
DSCD-GRIK08	-	1	€ 19,00
DSCD150-120S	120°	1	€ 36,00

INCLUDED ACCESSORIES:

CM35 Safety Cable

NEW

HIGH/LOW-BAY

DISCOVERY SLIM

**PRO
LINE**

**2 YEARS
WARRANTY**



ADVANTAGES

Industrial suspension made of high dissipation aluminium, with DOB technology. Extreme compactness with high performance.

Characteristics

RA

CRI>80

-63%

Savings

I

Insulation
class

IP65

Degree of
protection

LED

Energetic
class

APPLICATIONS

Great solution for workshops, construction sites and warehouses.

Product code	Watt	Equiva- lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW DSCS-15011040	150W	250W SAP	12200Lm	4000K	200-240V/AC 50/60 Hz	120°	724mA	> 0,9	300x35	1340	10	€ 165,00
NEW DSCS-20011040	200W	400W SAP	18000Lm	4000K	200-240V/AC 50/60 Hz	-	966mA	> 0,9	360x45	2390	5	€ 235,00




A LUMINOUS FLUX
WITH ENDLESS POWER



STREET LIGHTS

The places where we live and the sites we visit take on a whole new value thanks to efficient LED lighting. Brilliant and homogeneous light makes the urban context more fascinating and eco-friendly.

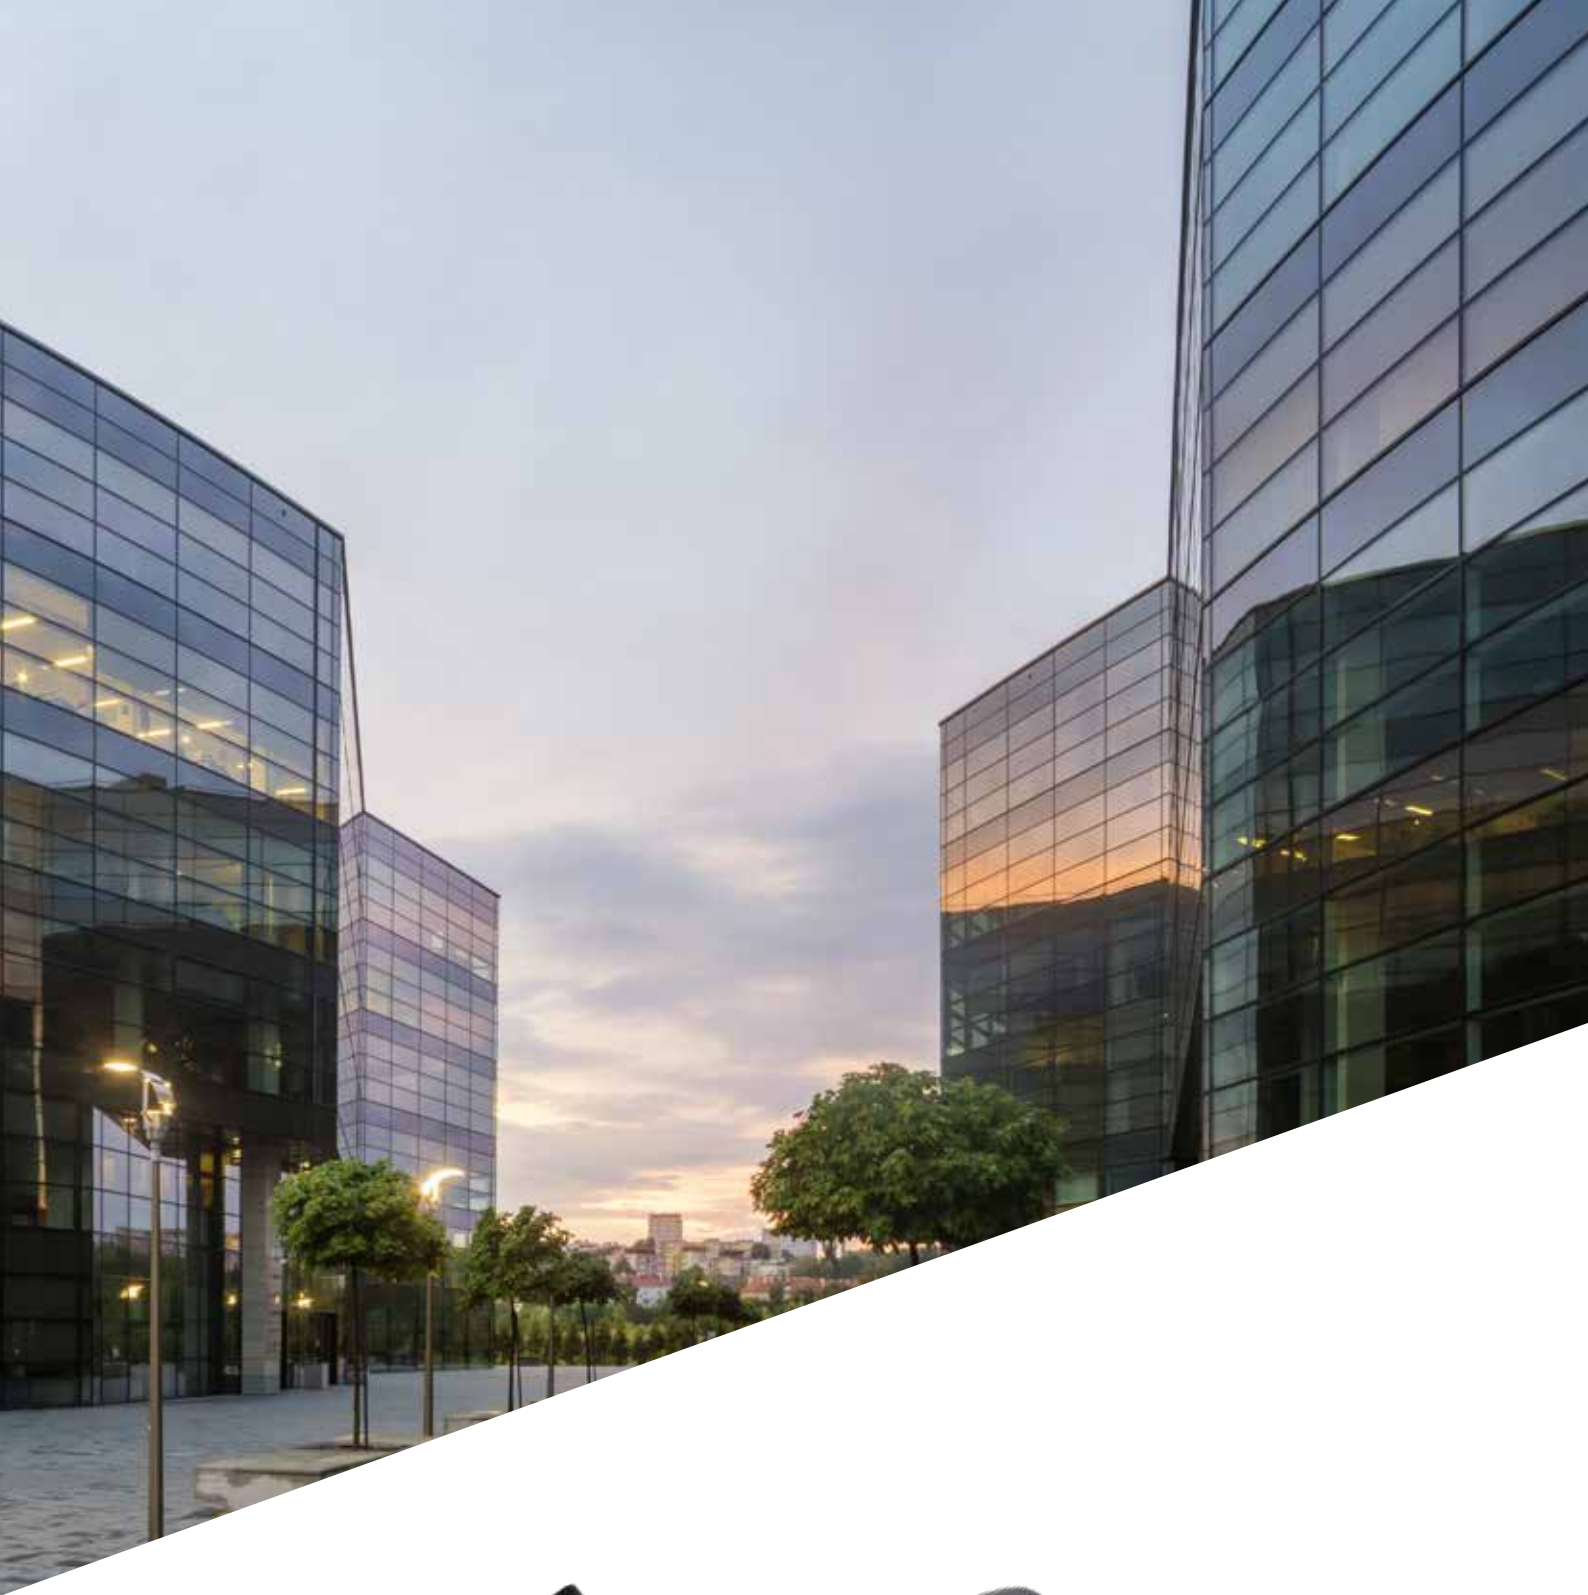

EkoDeo · EVOSTREET · SHARK Dim · ZEROTONDO · CITYONE

STREET LIGHTS EkoDeo



ADVANTAGES

Street light made of high dissipation aluminium, with DOB technology. Extreme compactness with high performance.

Characteristics

RA	60.000	on off	I	IP65	LED	IK09
CRI>80	Lifetime (hours)	≥30.000 Switches	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Designed for parking lots, shopping malls, pedestrian boulevards, public gardens, residences, villas, outdoor areas and industrial buildings.

RAL 9011

Product code	Watt	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxIxH mm	Pole Connection Ø mm	Weight gr	Packing pcs	Price
EKD-1209540	120W	12000Lm	4000K	190-260V/AC 50/60 Hz	65° - 140°	580mA	≥0,98	562x240x77	60	2800	6	€ 199,00

Accessories

adjustable head pole in diecast aluminium



ATP6040D



ATP6060

Product code	Dimensions LxIxH mm	Packing pcs	Price
ATP6040D	Female Ø60mm, male Ø40mm	1/6	€ 26,00
ATP6060	Female Ø60mm, male Ø60mm	1/6	€ 35,00

NEW

STREET LIGHTS

EVOSTREET

3 YEARS
WARRANTY



fino a
150W 18000 lm

ADVANTAGES

Strong die cast aluminium street light, equipped with temperate glass resistant to thermal shocks. Adjustable and suitable for head-to-post fastening. For 60mm pole. Easy inspection in total safety: Double insulation sectioner that stops power when rear door is opened.


Characteristics

RA	50.000	on off	I	IP65	LED
CRI>80	Lifetime (hours)	≥25.000 Switches	Insulation class	Degree of protection	Energetic class

APPLICATIONS

Designed for parking lots, shopping malls, pedestrian boulevards, bike lanes, public gardens, residences, villas, outdoor areas and industrial buildings.

Product code	Watt	Lumen	Light colour	Volt/Hertz	Beam angle	Milliamps	Power factor	Dimensions LxIxH mm	Weight gr	Packing pcs	Price
NEW EVOS-609540	60W	7200Lm	4000K	100-240V/AC 50/60 Hz	90° - 144°	280mA	≥0,95	200x535x120	3400	1	€ 210,00
NEW EVOS-909540	90W	10800Lm	4000K	100-240V/AC 50/60 Hz	90° - 144°	590mA	≥0,95	235x620x125	5000	1	€ 299,00
NEW EVOS-1209540	120W	14400Lm	4000K	100-240V/AC 50/60 Hz	90° - 144°	720mA	≥0,95	260x690x130	6000	1	€ 349,00
NEW EVOS-1509540	150W	18000Lm	4000K	100-240V/AC 50/60 Hz	90° - 144°	850mA	≥0,95	260x690x130	6000	1	€ 379,00



easy adjustment



One product for different installations

STREET LIGHTS

SHARK Dim

Dimmable



SHARKD
60

SHARKD
90-120



ADVANTAGES

- Average lifespan of up to 50,000 hours
- 60% energy savings that reduce operating costs and safeguard the environment, without sacrificing the quality of light
- Aluminium body and frame
- Epoxy powder paint, corrosion-resistant
- High-performance calibrated optics system, resistant to high temperatures and UV rays
- Tempered transparent glass diffuser resistant to thermal shocks and impacts (IK08)
- Temperature-controlled drivers (pulse protection in accordance with EN 61547)
- Easy inspection in total safety: Double insulation sectioner that stops power when rear door is opened
- Built-in level for proper alignment of the device with respect to the road surface
- Dimmers with 1-10V system

Characteristics

						
CRI>70	Lifetime (hours)	≥25.000 Switches	Insulation class	Degree of protection	Energetic class	Impact protection

RAL 7037

APPLICATIONS

Designed for parking lots, shopping malls, pedestrian boulevards, bike paths, public gardens, residences, villas, outdoor areas and industrial buildings.

Product code	Watt	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions LxHxW mm	Weight gr	Packing pcs	Price
SHARKD-609540	60W	7000Lm	4000K	100-240V/AC 50/60 Hz	90° - 144°	290mA	≥0,95	690x305x135	3600	1	€ 379,00
SHARKD-909540	90W	9000Lm	4000K	100-240V/AC 50/60 Hz	90° - 144°	420mA	≥0,95	690x305x135	7900	1	€ 449,00
SHARKD-1209540	120W	12000Lm	4000K	100-240V/AC 50/60 Hz	90° - 144°	570mA	≥0,95	690x305x135	7900	1	€ 599,00

STREET LIGHTS ZEROTONDO



ADVANTAGES

Die cast aluminium structure, PC opal lens, dark grey colour. It has an average lifespan of up to 50,000 hours, resistant to corrosion, it is suitable for 60mm poles.

Characteristics

RA	50.000	on off	-85%	I	IP65	LED	IK08
CRI>75	Lifetime (hours)	≥25.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Ideal for pedestrian boulevards, public gardens, residences, outdoor areas of industrial buildings.

POLE DIAMETER 60 MM

RAL 7024

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
ZTD-605240	60W	400W	4650Lm	4000K	110-240V/AC 50/60 Hz	100°	270mA	≥0,98	520x317	5000	1	€ 349,00

NEW

STREET LIGHTS
CITYONE**2 YEARS**
WARRANTY**ADVANTAGES**

Die cast aluminium structure, tempered glass, dark grey colour. It has an average lifespan of up to 50,000 hours. It is resistant to corrosion and suitable for 60mm poles.


Characteristics

RA	50.000	on off	-85%	I	IP65	LED	IK08
CRI>75	Lifetime (hours)	≥30.000 Switches	Savings	Insulation class	Degree of protection	Energetic class	Impact protection

APPLICATIONS

Ideal for pedestrian boulevards, gardens, public, residence, outdoor areas of industrial buildings.

Product code	Watt	Equiva-lent	Lumen	Light colour	Volt/Hertz	Angle	Milliamps	Power factor	Dimensions Øxh mm	Weight gr	Packing pcs	Price
NEW CTY-604540	60W	400W	7200Lm	4000K	110-240V/AC50/60 Hz	90° - 140°	125mA	> 0,90	50x523	9000	1	€ 329,00

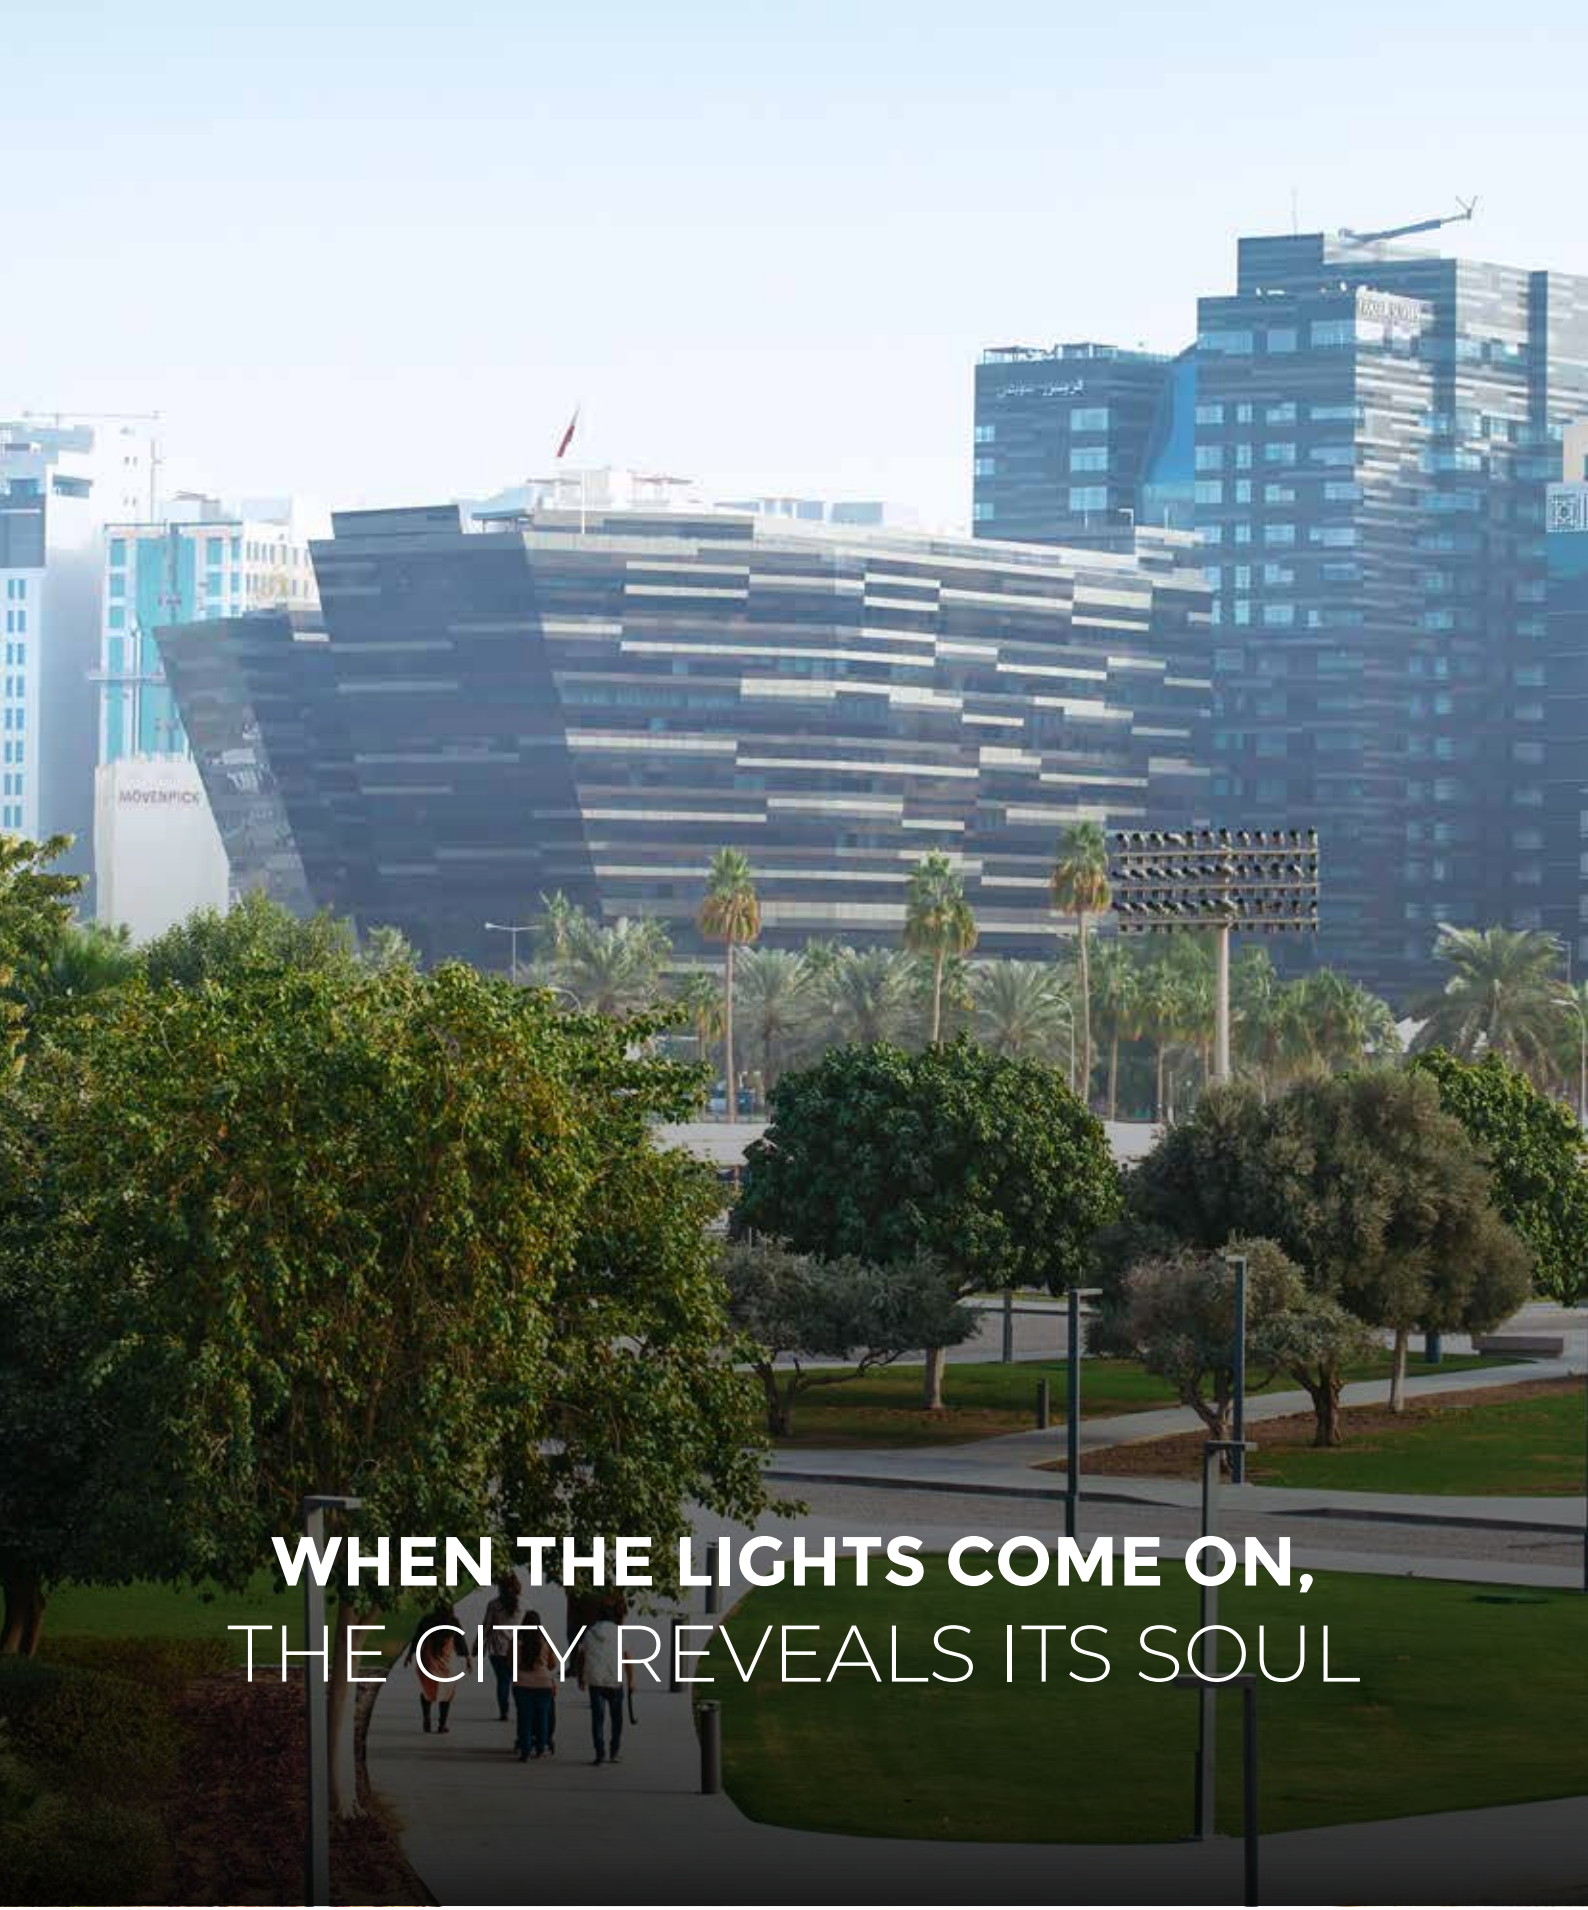

**WHEN THE LIGHTS COME ON,
THE CITY REVEALS ITS SOUL**





DISPLAY SYSTEMS

EXPO-PROMO · EXPO-CEN1 · BALUX 4

Three different solutions to highlight our products: ideal display exhibitors for effective promotional sale.

EXPO-PROMO

PROMOTIONAL GROUND BASKET

ADVANTAGES

- Suitable for promotional sale, especially for large-scale distribution.
- Supplied empty.

Product code	Dimensions LxIxh mm	Packing pcs	Price
EXPO-PROMO	550x400x860	1	€ 20,00



EXPO-CEN1

GROUND DISPLAY

ADVANTAGES

- Exhibitor with 20 metal hooks
- Supplied empty

Product code	Dimensions LxIxh mm	Packing pcs	Price
EXPO-CEN1	457x400x1800	1	€ 60,00



BALUX 4

LAMP DISPLAY AND TESTING

ADVANTAGES

- Electric professional display with E27, E14, GU10 lamp holders included.

Product code	Dimensions LxIxh mm	Packing pcs	Price
BALUX4	397x 90.11x 288	1	€ 49,00





ALPHABETIC INDEX

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
--------------	-------------------	------------------	----------	------	---------

AC2-142430	20	10	9020142430016	128	25,90
AC2-142440	20	10	9090171009620	128	25,90
AC2-142460	20	10	9020142460013	128	25,90
AC2-482430	20	10	9090171000771	128	16,90
AC2-482460	20	10	9090171000788	128	16,90
AC2-722430	20	10	9090171000795	128	18,90
AC2-722440	20	10	9090171009613	128	18,90
AC2-722460	20	10	9090171000801	128	18,90
AC2BL-182430	20	10	9090171001815	129	16,90
AC2BL-182460	20	10	9090171001822	129	16,90
AC90-146030	20	10	9090171009309	130	43,00
AC90-146040	20	10	9090171009316	130	43,00
AC90-146060	20	10	9090171009521	130	43,00
AC90-2012030	20	10	9090171009323	130	66,00
AC90-2012040	20	10	9090171009330	130	66,00
AC90-2012060	20	10	9090171009347	130	66,00
AC90-2030030	20	10	9090171009354	132	160,00
AC90-2030040	20	10	9090171009538	132	160,00
AC90-2030060	20	10	9090171009361	132	160,00
AC90-2424030	20	10	9090171009378	130	122,00
AC90-2424040	20	10	9090171009385	130	122,00
AC90-2424060	20	10	9090171009392	130	122,00
AC90-2442030	20	10	9090171009408	132	210,00
AC90-2442040	20	10	9090171009415	132	210,00
AC90-2442060	20	10	9090171009422	132	210,00
AC90-3024030	20	10	9090171009439	131	130,00
AC90-3024040	20	10	9090171009446	131	130,00
AC90-3024060	20	10	9090171009453	131	130,00
AC90-723030	20	10	9090171009491	130	29,00
AC90-723040	20	10	9090171009507	130	29,00
AC90-723060	20	10	9090171009514	130	29,00
AC9067-146030	20	10	9090171009460	133	55,00
AC9067-146040	20	10	9090171009477	133	55,00
AC9067-146060	20	10	9090171009484	133	55,00
ACBL-486030	20	10	9021486030108	129	29,90
ACBL-486060	20	10	9021486060105	129	29,90
ACBNRBI-CNEND	180	10	9090171012330	241	1,00
ACBNRBI-CNFLEX	40	10	9090171012293	241	18,00
ACBNRBI-CNINT	180	10	9090171012194	241	6,00
ACBNRBI-CNL	80	20	9090171012231	241	11,00
ACBNRBI-CNINL	80	20	9090171012217	241	11,00
ACBNRBI-CNLIIVE	90	5	9090171012316	241	6,00
ACBNRBI-CNT	40	10	9090171012255	241	16,50
ACBNRBI-CNX	40	10	9090171012279	241	21,00
ACBNRBI-KIT	90	5	9090171012361	240	6,00
ACBNRNE-CNEND	180	10	9090171012347	241	1,00
ACBNRNE-CNFLEX	40	10	9090171012309	241	18,00
ACBNRNE-CNINT	180	10	9090171012200	241	6,00
ACBNRNE-CNL	80	20	9090171012248	241	11,00
ACBNRNE-CNINL	80	20	9090171012224	241	11,00
ACBNRNE-CNLIIVE	90	5	9090171012323	241	6,00
ACBNRNE-CNT	40	10	9090171012262	241	16,50
ACBNRNE-CNX	40	10	9090171012286	241	21,00
ACBNRNE-KIT	90	5	9090171012354	240	6,00
ACCN10	20	10	9090171011869	135	0,50
ACCN10ANG	20	10	9090171011890	135	1,40
ACCN10T	20	10	9090171011906	135	1,90
ACCN10WIRE	20	10	9090171011876	135	0,70
ACCN10WIRE2	20	10	9090171011883	135	1,20
ACCN10X	20	10	9090171011913	135	2,40
ACCN8	20	10	9090171011807	135	0,50
ACCN8ANG	20	10	9090171011838	135	1,40
ACCN8T	20	10	9090171011845	135	1,90
ACCN8WIRE	20	10	9090171011814	135	0,70
ACCN8WIRE2	20	10	9090171011821	135	1,20
ACCN8X	20	10	9090171011852	135	2,40
ACRBL-486010	20	10	9021486010100	129	39,90
ACRBL-196010	20	10	9090171011364	128	85,00
ACRSM-484800	20	10	9090171012453	32	69,00

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
--------------	-------------------	------------------	----------	------	---------

ACSB-151240	24	6	9090171004571	287	24,90
ACSB-321240	12	1	9090171005196	289	54,90
ACSB-681240	8	1	9090171005202	289	89,90
ACSBL-151240BL	16	4	9090171007145	288	23,90
ACSS-151240	24	6	9090171004588	287	24,90
ACSS-321240	12	1	9090171007350	289	54,90
ACSSL-151240BL	16	4	9090171007152	288	23,90
ALD-051630	12	1	9020605163000	278	53,00
ALD-056030	6	1	9020605060300	278	91,00
ARB-182730	24	6	9021518273008	76	18,90
ARB-182740	24	6	9021518274029	76	18,90
ARB-202730	24	6	9090171007329	77	15,50
ARB-202740	24	6	9090171007336	77	15,50
ARB-202760	24	6	9090171010459	77	15,50
ARB-242730	24	6	9090171000405	77	17,90
ARB-242740	24	6	9090171002874	77	17,90
ARB-242760	24	6	9090171000412	77	17,90
ARBD-182730	24	6	9021518273060	76	27,50
ARP-072730	50	10	9090171000467	72	3,90
ARP-072764	50	10	9090171000474	72	3,90
ARP-091430	50	10	9090171003666	75	3,90
ARP-091464	50	10	9090171003741	75	3,90
ARP-102730	50	10	9090171000481	72	4,90
ARP-102740	50	10	9090171005486	72	4,90
ARP-102764	50	10	9090171000498	72	4,90
ARP-122430	50	10	9090171003185	74	11,90
ARP-122440	50	10	9090171003192	74	11,90
ARP-122730	50	10	9090171000504	72	5,90
ARP-122740	50	10	9090171005493	72	5,90
ARP-122764	50	10	9090171000511	72	5,90
ARP-152730	50	10	9090171000528	73	7,40
ARP-152740	50	10	9090172002149	73	7,40
ARP-152764	50	10	9090171000535	73	7,40
ARP-182730	50	10	9090172002156	73	9,40
ARP-182730BL	24	6	9090171006902	81	9,40
ARP-182740	50	10	9090171003048	73	9,40
ARP-182764	50	10	9090172002163	73	9,40
ARP-182764BL	24	6	9090171006919	81	9,40
ARP-242730	40	10	9090171002843	73	12,70
ARP-242730BL	24	6	9090171006926	81	13,90
ARP-242740	40	10	9090171002850	73	12,70
ARP-242764	40	10	9090171002867	73	12,70
ARP-242764BL	24	6	9090171006933	81	13,90
ATP6040D	22	1	9090171010299	368	26,00
ATP6060	1	1	9090171009897	368	35,00
ATPLVT	24	1	9090171010114	294	16,90
AXO-0540B	24	12	9090171010282	272	34,90
AXO-109030	6	1	9090171004861	273	57,00
AXO-109040	6	1	9090171004878	273	57,00
AXO-1GU10B	24	12	9090171010268	271	17,90
AXO-209030	6	1	9090171004847	273	69,00
AXO-209040	6	1	9090171004854	273	69,00
AXO-2GU10B	24	12	9090171010275	271	23,90
BALUX4	10	1	9051000010309	375	49,00
BCP-122840	6	1	9090171008814	254	20,50
BCP-183340	6	1	9090171008821	254	25,00
BCP-243840	6	1	9090171008838	254	32,00
BCP-323840	6	1	9090171008845	254	37,00
BCS-142530	10	1	9090171008913	255	16,50
BCS-142540	10	1	9090171008920	255	16,50
BCS-203030	10	1	9090171008937	255	20,50
BCS-203040	10	1	9090171008944	255	20,50
BCS-243530	10	1	9090171008951	255	24,00
BCS-243540	10	1	9090171008968	255	24,00
BCS-323930	10	1	9090171008975	255	33,00
BCS-323940	10	1	9090171008982	255	33,00
BCSMA-243800	10	1	9090171012415	31	59,00
BNRBI-2000	10	1	9090171012170	240	49,00
BNRNE-2000	10	1	9090171012187	240	49,00

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
CF1P-AR111	16	1	9020611101003	218	26,00
CF2P-AR111	8	1	9020611102000	218	42,00
CF3P-AR111	8	1	9020611103007	218	67,00
CFAR-102030	8	1	9020102030140	250	39,00
CFAR-202530	8	1	9020253030143	250	49,00
CFAR-303030	4	1	9030303030146	250	59,00
CFBI-102030	8	1	9020102030249	250	39,00
CFBI-202530	8	1	9020253030242	250	49,00
CFBI-303030	4	1	9030303030245	250	59,00
CFRO-102030	8	1	9020102030348	250	39,00
CFRO-202530	8	1	9020253030341	250	49,00
CFRO-303030	4	1	9030303030344	250	59,00
CFVE-102030	8	1	9020102030447	250	39,00
CFVE-202530	8	1	9020253030440	250	49,00
CFVE-303030	4	1	9030303030443	250	59,00
CL-152430	24	6	9090171004557	110	16,90
CL-152440	24	6	9090171004564	110	16,90
CLXH1G-041430	50	10	9021041430022	69	2,20
CLXH1G-042730	50	10	9021042730022	69	2,20
CLXM1-041430	50	10	9021041430039	69	2,20
CLXM1C-041430	50	10	9021041430046	69	2,20
CM-151130	24	6	9031511300007	233	62,00
CMB	500	10	9090171005721	307	11,90
CND15	500	10	9090171005738	307	5,90
CND25	500	10	9090171005745	307	6,90
CNT	500	10	9090171005752	307	9,50
CRL-1218030	24	6	9090171007824	103	13,90
CRL-1218040	24	6	9090171007831	103	13,90
CRL-1821830	24	6	9090171007848	103	16,90
CRL-1821840	24	6	9090171007855	103	16,90
CRL-2425330	24	6	9090171007862	103	19,90
CRL-2425340	24	6	9090171007879	103	19,90
CRT3-014000	40	1	9090171009798	204	23,00
CRT3E-010340	40	1	9090171009804	204	52,00
CRT6-054000	50	1	9090171009811	204	52,00
CRT6E-050340	50	1	9090171009828	204	73,00
CTLSMA	100	20	9090171012507	37	21,00
CTLSMA-ACRGBW	20	10	9090171012446	33	33,00
CTY-604540	1	1	9090171012408	372	329,00
CW-139540	4	1	9090171005479	327	32,00
CW-329540	4	1	9090171005462	327	59,00
DALI310	4	1	9090171007510	221	99,00
DMA-109540	10	1	9020910954003	348	22,00
DMA-1509540	1	1	9020915095404	348	369,00
DMA-2009540	1	1	9020920095406	348	490,00
DMA-309540	4	1	9020930954007	348	59,00
DMA-509540	4	1	9020950954001	348	95,00
DMA-709540	4	1	9020970954005	348	139,00
DMAB-109530	10	1	9020910953006	348	22,00
DMAS-1009540	1	1	9090171006148	349	155,00
DMAS-1509540	1	1	9090171006155	349	199,00
DMAS-2009540	2	1	9090171006162	349	289,00
DR60	6	1	9090171004946	307	39,90
DR80	10	1	9090171004953	307	59,00
DRIMPO40	1	1	9300040001236	197	36,00
DRIMPO42	100	1	9090171003871	197	36,00
DRIMPO42D	100	1	9090171004236	198	59,00
DSC-10012040	1	1	9090171005448	362	265,00
DSC100-90S	10	1	9090171005776	362	36,00
DSC100-LENS60	10	1	9090171005790	362	36,00
DSC100-LENS90	10	1	9090171005806	362	36,00
DSC150-90S	10	1	9090171005042	362	36,00
DSC150-LENS60	10	1	9090171005080	362	36,00
DSC150-LENS90	10	1	9090171005097	362	36,00
DSCD-15011040	1	1	9090171007664	363	239,00
DSCD-GR10K8	10	1	9090171007688	363	19,00
DSCD150-120S	10	1	9090171009842	363	36,00
DSCS-15011040	10	1	9090171011951	364	165,00
DSCD-20011040	1	1	9090171013009	363	310,00
DSCS-20011040	5	1	9090171011968	364	235,00
DSD-061230	50	10	9090171013672	87	17,90
DSD-061240	50	10	9090171013689	87	17,90
DSD-063830	50	10	9090171005660	87	7,00
DSD-063840	50	10	9090171005677	87	7,00
DSD-063860	50	10	9090171005684	87	7,00
DVS-059040	12	1	9090171008463	292	49,90
DVS-109040	8	1	9090171007701	293	89,90
ECLISSE150	16	1	9090171007534	228	84,00
ECLISSE250	8	1	9090171007541	228	149,00
EKD-1209540	6	1	9090171009668	368	199,00
ELG3-062730BL	48	12	9090171003888	80	2,60
ELG3-062764BL	48	12	9090171003895	80	2,60
ELG3-092730BL	48	12	9090171003901	80	3,10
ELG3-092764BL	48	12	9090171003918	80	3,10
ELG3-122730BL	48	12	9090171003925	80	3,60
ELG3-122764BL	48	12	9090171003932	80	3,60
ELG3-152730BL	48	12	9090171003949	80	5,50
ELG3-152764BL	48	12	9090171003956	80	5,50
ELH1G-031430BL	48	12	9090171004045	78	2,20
ELH1G-031464BL	48	12	9090171004052	78	2,20
ELH1G-032730BL	48	12	9090171004069	78	2,20
ELH1G-032764BL	48	12	9090171004076	78	2,20
ELH1G-061430BL	48	12	9090171004083	79	2,50
ELH1G-061464BL	48	12	9090171004090	79	2,50
ELH1G-062730BL	48	12	9090171004106	79	2,50
ELH1G-062764BL	48	12	9090171004113	79	2,50
ELK110-061030BL	48	12	9090171004120	79	3,40
ELK110-061064BL	48	12	9090171004137	79	3,40
ELM1-031430BL	48	12	9090171003963	78	2,20
ELM1-031464BL	48	12	9090171003970	78	2,20

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
ELM1-061430BL	48	12	9090171003987	79	2,50
ELM1-061464BL	48	12	9090171003994	79	2,50
ELM1C-031430BL	48	12	9090171004007	78	2,20
ELM1C-031464BL	48	12	9090171004014	78	2,20
ELM1C-061430BL	48	12	9090171004021	79	2,50
ELM1C-061464BL	48	12	9090171004038	79	2,50
EVOS-1209540	1	1	9090171010589	369	349,00
EVOS-1509540	1	1	9090171010596	369	379,00
EVOS-609540	1	1	9090171010565	369	210,00
EVOS-909540	1	1	9090171010572	369	299,00
EXA-050830	24	6	9090171000344	97	7,90
EXA-101230	24	6	9090171000351	97	10,90
EXA-101240	24	6	9090171000368	97	10,90
EXA-151840	24	6	9090171000375	97	16,90
EXPO-CEN1	4	1	9090171001891	374	60,00
EXPO-PROMO	5	1	9090171000429	374	20,00
EXTR-1501250	1	1	9090171004595	360	450,00
EXTR-KIT	25	2	9090171004601	361	21,00
EXTR-LENS3070	20	5	9090171004632	361	72,00
EXTR-LENS40130	20	5	9090171004649	361	72,00
EXTR-LENS6090	20	5	9090171004625	361	72,00
EXTR-ROTAB	25	2	9090171004618	361	39,00
EXTR-SENS	25	1	9090171004656	361	69,00
FC-309540	6	1	9090171009729	331	76,00
FC-509540	4	1	9090171003697	331	149,00
FC-809540	4	1	9090171003680	331	169,00
FCR-309540	4	1	9090171003673	330	185,00
FCRF-209540	6	1	9090171003703	330	122,00
FGF-011427	48	12	9013011427002	94	3,90
FGF-011450	48	12	9090171003024	94	3,90
FNV-020040	48	12	9090171010237	318	6,90
FRB-121830	20	1	9090171009231	171	26,50
FRB-121840	20	1	9090171009248	171	26,50
FRB-182330	20	1	9090171008005	171	29,00
FRB-182340	20	1	9090171008012	171	29,00
FRBS-121830	20	1	9090171009255	172	26,00
FRBS-121840	20	1	9090171009286	172	26,00
FRBS-182330	20	1	9090171009279	172	29,00
FRBS-182340	20	1	9090171009262	172	29,00
FRMB-129030	18	6	9090171011227	270	43,00
FRMB-129040	18	6	9090171011166	270	43,00
FRMN-129030	18	6	9090171011210	270	43,00
FRMN-129040	18	6	9090171011159	270	43,00
FRW-100040	20	1	9090171008364	328	33,00
FRW-200040	10	1	9090171008371	328	45,00
FRWR-100040	20	1	9090171008340	328	55,90
FRWR-200040	10	1	9090171008357	328	84,00
FSBR-150	24	6	9090171007596	249	15,90
FSDM1-150130	6	1	9031501300000	237	132,00
FSDM1-150140	6	1	9031501400007	237	132,00
FSDM2-300230	6	1	9030023000009	237	216,00
FSDM2-300240	6	1	9030024000008	237	216,00
FSDM3-450330	6	1	9045033000000	237	324,00
FSDM3-450340	6	1	9045034000009	237	324,00
FSNE-150	24	6	9090171007589	249	15,90
FSRG-150	24	6	9090171007602	249	15,90
FSRGV-150	24	6	9090171007619	249	15,90
FSTABCL-062722	5	1	9090171012705	283	85,00
FSTACL-062722	5	1	9090171008517	283	85,00
FSTACO-062722	5	1	9090171008524	283	85,00
FSTADAP-12W	30	1	9090171008531	283	16,00
FSTARBLU-062722	100	1	9090171011654	283	5,50
FSTARCL-062722	100	1	9090171008548	283	5,50
FSTARGI-062722	100	1	9090171011661	283	5,50
FSTARMAG-062722	100	1	9090171011678	283	5,50
FSTARRO-062722	100	1	9090171011685	283	5,50
FSTARVE-062722	100	1	9090171011692	283	5,50
FT-066830	10	1	9090171006995	210	8,50
FT-066840	10	1	9090171007008	210	8,50
FTAR-150	50	10	9090171005936	248	5,90
FTBI-150	50	10	9090171005875	248	5,90
FTGR-150	50	10	9090171005905	248	5,90
FTNE-150	50	10	9090171005899	248	5,90
FTRO-150	50	10	9090171005882	248	5,90
FTS-301340	30	3	9090171012149	234	57,00
FTS-602340	9	3	9090171012156	234	109,00
FTSD-221730	8	2	9032217300001	235	108,00
FTSD-221740	8	2	9032217400008	235	108,00
FTSD-282330	8	2	9032823300006	235	132,00
FTSD-282340	8	2	9032823400003	235	132,00
FTSD-392330	8	2	9033923300002	235	156,00
FTSD-501730	8	2	9035017300004	235	165,00
FTSD-501740	8	2	9035017400001	235	165,00
FTTU-150	50	10	9090171005929	248	5,90
FTVE-150	50	10	9090171005912	248	5,90
FVT8-096040	25	1	9023096040140	123	5,50
FVT8-096065	25	1	9023096065143	123	5,50
FVT8-149040	25	1	9090171001709	123	9,50
FVT8-149065	25	1	9090171001716	123	9,50
FVT8-181230	25	1	9090171005400	123	8,50
FVT8-181240	25	1	9023181240141	123	8,50
FVT8-181265	25	1	9023181265144	123	8,50
FVT8-221530	25	1	9090171005417	123	9,50
FVT8-221540	25	1	9023221540149	123	9,50
FVT8-221565	25	1	9023221565142	123	9,50
G3RGBW-092740	50	10	9090171011036	100	16,90
G3SMART-102700	50	10	9090171010626	30	21,50
G3SP-102730	24	6	9090171006308	102	11,90
G3SP-102730BL	24	6	9090171006940	105	11,90
G3SP-102740	24	6	9090171006315	102	11,90

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
--------------	-------------------	------------------	----------	------	---------

G3SP-102764	24	6	9090171006322	102	11,90
G3SP-102764BL	24	6	9090171006957	105	11,90
GDN-051530	24	1	9020605153001	278	38,00
GDN-058030	6	1	9020605803005	278	65,00
GXLED-055330	24	6	9090171001136	109	14,50
GXLED-055340	24	6	9090171001143	109	14,50
HE-121830	12	1	9023121830142	305	36,00
HE-242230	8	1	9023242230142	305	48,00
HMS-1009540	5	1	9090171011579	345	105,00
HMS-1509540	5	1	9090171011586	345	130,00
HMS-2009540	5	1	9090171011593	345	165,00
HMS-709540	10	1	9090171011555	345	59,00
HMSB-1009530	5	1	9090171011562	345	105,00
HMSB-709530	10	1	9090171011548	345	59,00
HO-122230	12	1	9023122230149	305	36,00
HO-129540	12	1	9090171003734	334	43,00
HOP-208540	20	5	9090171009583	336	21,00
HOP-308540	10	5	9090171009590	336	31,00
HOP-508540	10	5	9090171009606	336	47,00
HOS-209540	12	1	9090171003727	335	65,00
HR80G3-092730	50	10	9090171005981	68	2,60
HR80G3-092740	50	10	9090171005998	68	2,60
HR80G3-092764	50	10	9090171006001	68	2,60
HR80G3-112730	50	10	9090171006018	68	3,10
HR80G3-112740	50	10	9090171006025	68	3,10
HR80G3-112764	50	10	9090171006032	68	3,10
HR80G3-152730	50	10	9090171006049	68	5,30
HR80G3-152740	50	10	9090171006056	68	5,30
HR80G3-152764	50	10	9090171006063	68	5,30
HRG3-102727	50	10	9090171003796	66	6,20
HRG3-122727	50	10	9090171003802	66	7,40
HRG3-152727	50	10	9090171003819	66	8,90
HRH1G-061427	50	10	9090171003772	66	4,90
HRH1G-062727	50	10	9090171003789	66	4,90
HRK110-051027	50	10	9090171003826	67	5,50
HRK38-051027	50	10	9090171004663	67	5,50
HRM1-061427	50	10	9090171003765	66	4,90
IFL-109530	24	6	9090171000894	337	16,50
IFL-209530	12	6	9090171001655	337	21,00
IFL-309530	12	6	9090171000900	337	31,00
ING125-102727	20	5	9090171002416	46	11,90
ING125-102740	20	5	9090171010145	46	11,90
ING125-102760	20	5	9090171005011	46	11,90
ING125-162727	20	5	9090171012699	46	17,90
ING125-162740	20	5	9090171012682	46	17,90
ING3-042727	50	10	9013042727010	46	3,60
ING3-042727BL2	48	6	9090171006964	59	7,90
ING3-042740	50	10	9090171010060	46	3,60
ING3-042740BL2	48	6	9090171007190	59	7,90
ING3-082727	50	10	9013082727018	46	4,20
ING3-082727BL2	48	6	9090171006735	59	9,50
ING3-082740	50	10	9090171010077	46	4,20
ING3-082740BL2	48	6	9090171007206	59	9,50
ING3-102727	50	10	9090171005653	46	6,20
ING3-102727BL2	48	6	9090171006759	59	14,50
ING3-102740	50	10	9090171010091	46	6,20
ING3-102740BL2	48	6	9090171007220	59	14,50
ING3-162727	50	10	9090171012668	46	13,90
ING3-162740	50	10	9090171012675	46	13,90
ING3P-082727	50	10	9090171005646	46	4,90
ING3P-082727BL2	48	6	9090171006742	59	11,90
ING3P-082740	50	10	9090171010084	46	4,90
ING3P-082740BL2	48	6	9090171007213	59	11,90
ING95-082727	20	5	9090171010954	46	8,50
ING95-082740	20	5	9090171010961	46	8,50
INH1G-021427	50	10	9013021427016	44	2,90
INH1G-021427BL2	48	6	9090171006636	56	6,50
INH1G-022727	50	10	9013022727016	44	2,90
INH1G-022727BL2	48	6	9090171006643	56	6,50
INH1G-041427	50	10	9013041427102	44	3,50
INH1G-041427BL2	48	6	9090171006674	57	7,50
INH1G-041440	50	10	9090171010015	44	3,50
INH1G-041440BL2	48	6	9090171007169	57	7,50
INH1G-042727	50	10	9013042727119	44	3,50
INH1G-042727BL2	48	6	9090171006681	57	7,50
INH1G-042740	50	10	9090171010022	44	3,50
INH1G-042740BL2	48	6	9090171007176	57	7,50
INH1G-061427	50	10	9090171010633	45	4,20
INH1G-061427BL2	48	6	9090171010671	58	8,90
INH1G-061440	50	10	9090171010657	45	4,20
INH1G-061440BL2	48	6	9090171010695	58	8,90
INH1G-062727	50	10	9090171010640	45	4,20
INH1G-062727BL2	48	6	9090171010688	58	8,90
INH1G-062740	50	10	9090171010664	45	4,20
INH1G-062740BL2	48	6	9090171010701	58	8,90
INM1-021427	50	10	9013021427023	44	2,90
INM1-021427BL2	48	6	9090171006650	56	6,50
INM1-041427	50	10	9013041427034	44	3,50
INM1-041427BL2	48	6	9090171006698	57	7,50
INM1-041440	50	10	9090171010039	44	3,50
INM1-041440BL2	48	6	9090171007183	57	7,50
INM1-061427	50	10	9090171010831	45	4,20
INM1-061427BL2	48	6	9090171010855	58	8,90
INM1-061440	50	10	9090171010848	45	4,20
INM1-061440BL2	48	6	9090171010862	58	8,90
INM1C-021427	50	10	9013021427030	44	2,90
INM1C-021427BL2	48	6	9090171006667	56	6,50
INM1C-041427	50	10	9013041427041	44	3,50
INM1C-041427BL2	48	6	9090171006728	57	7,50
INM1C-041440	50	10	9090171010053	44	3,50

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
--------------	-------------------	------------------	----------	------	---------

INM1C-041440BL2	48	6	9090171007237	57	7,50
INSG125-102730	20	5	9090171002546	49	11,90
INSG125-102740	20	5	9090171010152	49	11,90
INSG125-102760	20	5	9090171002553	49	11,90
INSG125-162730	20	5	9090171012651	49	17,90
INSG125-162740	20	5	9090171012644	49	17,90
INSG125-162760	20	5	9090171012637	49	17,90
INSG3-082730	50	10	9090171002522	49	4,20
INSG3-082730BL2	48	6	9090171006865	62	9,50
INSG3-082740	50	10	9090171010428	49	4,20
INSG3-082740BL2	48	6	9090171010992	62	9,50
INSG3-082760	50	10	9090171002539	49	4,20
INSG3-082760BL2	48	6	9090171006872	62	9,50
INSG3-102730	50	10	9090171007046	49	6,20
INSG3-102730BL2	48	6	9090171007077	62	14,50
INSG3-102740	50	10	9090171010442	49	6,20
INSG3-102740BL2	48	6	9090171011012	62	14,50
INSG3-102760	50	10	9090171007053	49	6,20
INSG3-102760BL2	48	6	9090171006896	62	14,50
INSG3-162730	50	10	9090171012620	49	13,90
INSG3-162740	50	10	9090171012613	49	13,90
INSG3-162760	50	10	9090171012606	49	17,90
INSG3D-082740	50	10	9090171007893	50	8,50
INSG3P-082730	50	10	9090171007022	49	4,90
INSG3P-082730BL2	48	6	9090171007060	62	11,90
INSG3P-082740	50	10	9090171010435	49	4,90
INSG3P-082740BL2	48	6	9090171011005	62	11,90
INSG3P-082760	50	10	9090171007039	49	4,90
INSG3P-082760BL2	48	6	9090171006889	62	11,90
INSH1G-041430	50	10	9090171002423	47	3,50
INSH1G-041430BL2	48	6	9090171006766	60	7,50
INSH1G-041440	50	10	9090171010374	47	3,50
INSH1G-041440BL2	48	6	9090171010978	60	7,50
INSH1G-041460	50	10	9090171002430	47	3,50
INSH1G-041460BL2	48	6	9090171006773	60	7,50
INSH1G-042730	50	10	9090171002447	47	3,50
INSH1G-042730BL2	48	6	9090171006780	60	7,50
INSH1G-042740	50	10	9090171010381	47	3,50
INSH1G-042740BL2	48	6	9090171010985	60	7,50
INSH1G-042760	50	10	9090171002454	47	3,50
INSH1G-042760BL2	48	6	9090171006797	60	7,50
INSH1G-061430	50	10	9090171010718	48	4,20
INSH1G-061430BL2	48	6	9090171010770	61	8,90
INSH1G-061440	50	10	9090171010732	48	4,20
INSH1G-061440BL2	48	6	9090171010794	61	8,90
INSH1G-061460	50	10	9090171010756	48	4,20
INSH1G-061460BL2	48	6	9090171010817	61	8,90
INSH1G-062730	50	10	9090171010725	48	4,20
INSH1G-062730BL2	48	6	9090171010787	61	8,90
INSH1G-062740	50	10	9090171010749	48	4,20
INSH1G-062740BL2	48	6	9090171010800	61	8,90
INSH1G-062760	50	10	9090171010763	48	4,20
INSH1G-062760BL2	48	6	9090171010824	61	8,90
INSH1GD-041440	50	10	9090171007909	50	5,50
INSH1GD-042740	50	10	9090171007916	50	5,50
INSM1-041430	50	10	9090171002461	47	3,50
INSM1-041430BL2	48	6	9090171006803	60	7,50
INSM1-041440	50	10	9090171010398	47	3,50
INSM1-041440BL2	48	6	9090171011029	60	7,50
INSM1-041460	50	10	9090171002478	47	3,50
INSM1-041460BL2	48	6	9090171006810	60	7,50
INSM1-061430	50	10	9090171010879	48	4,20
INSM1-061430BL2	48	6	9090171010909	61	8,90
INSM1-061440	50	10	9090171010886	48	4,20
INSM1-061440BL2	48	6	9090171010916	61	8,90
INSM1-061460	50	10	9090171010893	48	4,20
INSM1-061460BL2	48	6	9090171010923	61	8,90
INSM1C-041430	50	10	9090171002485	47	3,50
INSM1C-041430BL2	48	6	9090171006841	60	7,50
INSM1C-041440	50	10	9090171010411	47	3,50
INSM1C-041460	50	10	9090171002492	47	3,50
INSM1C-041460BL2	48	6	9090171006858	60	7,50
INSM1CD-041440	50	10	9090171007930	50	5,50
INSM1D-041440	50	10	9090171007923	50	5,50
INSTOR-041430	50	10	9090171002508	47	3,50
INSTOR-041430BL2	48	6	9090171006827	60	7,50
INSTOR-041440	50	10	9090171010404	47	3,50
INSTOR-041460	50	10	9090171002515	47	3,50
INSTOR-041460BL2	48	6	9090171006834	60	7,50
INTB-021427	50	10	9013021427047	46	5,30
INTB-021427BL	48	12	9090171010169	56	5,30
INTB-061427	50	10	9090171001129	46	6,90
INTB-061427BL	48	12	9090171010176	56	6,90
INTOR-041427	50	10	9090171002881	44	3,50
INTOR-041427BL2	48	6	9090171006704	57	7,50
INTOR-041440	50	10	9090171010046	44	3,50
INVDG3-042727	50	10	9090171009545	54	6,20
INVDG95-042727	50	10	9090171009552	54	13,50
INVDM1-021427	50	10	9090171009569	54	4,90
INVPD-042727	50	10	9090171009576	54	7,20
INVG125-082722	20	5	9090171002607	53	16,50
INVG125-102722	20	5	9090171002614	53	18,90
INVG125D-102722	20	5	9090171002621	53	21,50
INVG200-082722	4	1	9090171005639	55	72,00
INVG3-082722	50	10	9090171002591	53	7,90
INVM1-041422	50	10	9090171002560	52	5,30
INVM1C-041422	50	10	9090171002584	52	5,30
INVM1D-041422	50	10	9090171002577	52	6,70
INVP-082722	50	10	9090171002638	53	9,40
INVPD-082722	50	10	9090171002645	53	11,90

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €	Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
INVPS160-082722	4	1	9090171005622	55	69,00	LTS-302718	20	1	9090171012996	115	25,90
INVTOR-041422	50	10	9090171002652	52	5,30	LR80-152730	24	6	9020152730069	112	8,50
ITL-186040	6	1	9090171002898	164	36,00	LR80-152740	24	6	9090171002836	112	8,50
ITL-361240	6	1	9090171002904	164	65,00	LTS-302730	20	1	9090171010312	115	25,90
ITL-481540	6	1	9090171002911	164	89,00	LTS-302740	20	1	9090171010329	115	25,90
ITL-681540	6	1	9090171005349	164	99,00	LTS-502718	20	1	9090171010183	115	39,90
ITLR-186040	6	1	9090171012019	165	36,00	LTS-502722	20	1	9090171008128	115	39,90
ITLR-361240	6	1	9090171012026	165	55,00	LTS-502730	20	1	9090171008135	115	39,90
ITLR-481540	6	1	9090171012040	165	75,00	LTS-502740	20	1	9090171008142	115	39,90
ITLR-601540	6	1	9090171012057	165	82,00	LTS-504022	20	1	9090171008159	115	39,90
ITLRE-401240	6	1	9090171011180	165	139,00	LTS-504030	20	1	9090171008166	115	39,90
ITLRE-401540	6	1	9090171011197	165	149,00	LTS-504040	20	1	9090171008173	115	39,90
ITLRE-601540	6	1	9090171011203	165	165,00	LVT-059540	5	1	9090171007626	294	149,00
ITO-030040	24	12	9090171007114	312	6,90	LVT-159540	10	1	9090171010107	294	105,00
JESSY-AR111	6	1	9090171007404	222	31,00	LX110-061030	50	10	9090171001211	88	3,60
JESSY-BOLLE150	4	1	9090171007480	227	53,00	LX110-061040	50	10	9090171002805	88	3,60
JESSY-BOLLE250	3	1	9090171007497	227	67,00	LX110-061060	50	10	9090171001228	88	3,60
JESSY-RD100	24	1	9090171007428	225	8,50	LX110-081030	50	10	9090171001235	88	4,30
JESSY-RD130	24	1	9090171007459	225	10,90	LX110-081040	50	10	9090171010343	88	4,30
JESSY-SQ100	24	1	9090171007411	223	8,50	LX110-081060	50	10	9090171001242	88	4,30
JESSY-SQ120	24	1	9090171007435	223	10,90	LX38-061030	50	10	9090171001174	87	3,60
JESSY-SQ120GLASS	24	1	9090171007442	224	11,90	LX38-061040	50	10	9090171002799	87	3,60
JESSY-SQ45GR	24	1	9090171007473	223	10,90	LX38-061060	50	10	9090171001181	87	3,60
JESSY-SR120	24	1	9090171007466	224	10,90	LX38-081030	50	10	9090171001198	87	4,30
JESSY2-SQ2112	12	1	9090171007398	224	18,90	LX38-081040	50	10	9090171001336	87	4,30
K12XLED-300430	24	6	9021300430220	86	9,40	LX38-081060	50	10	9090171001204	87	4,30
K12XLED-300430BL	24	6	9090171011401	86	9,40	LX60-065330	50	10	9090171001259	89	5,50
K12XLED-300440	24	6	9090171011388	86	9,40	LX60-065340	50	10	9090171010350	89	5,50
K12XLED-300440BL	24	6	9090171011395	86	9,40	LX60-065360	50	10	9090171001266	89	5,50
K277LED-071030	24	6	9020071030110	86	2,90	LX60-085330	50	10	9090171001273	89	6,20
K277LED-071040	24	6	9090172002088	86	2,90	LX60-085340	50	10	9090171010367	89	6,20
K277LED-071060	24	6	9020071060117	86	2,90	LX60-085360	50	10	9090171001280	89	6,20
KIT-ACRGBW	100	1	9090171011791	134	35,00	MRO200	6	1	9090171007527	221	56,00
KIT-CLIP	100	1	9000585000229	198	9,50	MP-014030	24	6	9090171004700	299	23,50
KIT-EMG	18	1	9090171001648	197	69,60	MP-014040	24	6	9090171004717	299	23,50
KIT-EMG2	48	1	9090171006582	197	45,60	MP-036030	24	6	9090171004724	299	39,50
KIT-PLF	24	1	9090171001600	199	23,90	MP-036040	24	6	9090171004731	299	39,50
KIT-PLF120	12	1	9090171001976	199	25,90	MRT1-406040	4	1	9090171007800	186	75,00
KIT-PLF12060	12	1	9090171011142	199	27,90	MRT2-406040	4	1	9090171007817	186	85,00
KIT-PLFB	20	1	9090171012989	199	25,90	MS-066040	50	10	9090171007374	315	5,50
KIT-PLINE	150	1	9090171008036	198	6,90	MW-108040	20	1	9090171007107	326	23,90
KIT-PQ40	100	1	9000595000004	198	8,60	MX-1004040	10	5	9090171004533	117	105,00
KIT-PQE	100	1	9090171008111	198	13,20	MX-1004065	10	5	9021004065018	117	105,00
KITFTA-060830	10	1	9090171005165	211	38,90	MX-1504040	10	5	9090171004540	117	160,00
KLIRL	50	10	9090171011258	214	2,90	MX-1504065	10	5	9090171002003	117	160,00
KLIRM	50	10	9090171011234	214	2,50	MX-402740	20	5	9020402740015	117	59,00
KLIRS	50	10	9090171011241	214	2,50	MX-704040	10	5	9090171004526	117	83,00
KLIRXL	50	10	9090171011319	217	4,90	MX-704065	10	5	9020704065014	117	83,00
KLIRXLD	50	10	9090171011326	217	4,90	MXR-1004040	10	5	9090171006070	118	65,00
KLISL	50	10	9090171011357	215	3,40	MXR-1004065	10	5	9090171006087	118	65,00
KLISL2	50	10	9090171011302	216	5,90	MXR-502740	10	1	9090171007282	118	36,00
KLISM	50	10	9090171011272	215	2,90	MXR-502765	10	1	9090171007299	118	36,00
KLISM2	50	10	9090171011296	216	5,50	MXR-504040	10	1	9090171007305	118	36,00
KLISS	50	10	9090171011265	215	2,90	MXR-504065	10	1	9090171007312	118	36,00
KLISS2	50	10	9090171011289	216	5,50	NE-030040	24	12	9090171007121	312	8,50
KLISXL	50	10	9090171011333	217	4,90	ONH1G-061430	50	10	9021061430088	70	2,40
KLISXLD	50	10	9090171011340	217	4,90	ONH1G-061440	50	10	9090171002713	70	2,40
KLR-AR	50	10	9014003050031	213	6,90	ONH1G-061465	50	10	9090171002737	70	2,40
KLR-BI	50	10	9014003050017	213	6,90	ONH1G-062730	50	10	9021062730088	70	2,40
KLR-CR	50	10	9014003050024	213	7,90	ONH1G-062740	50	10	9090171002720	70	2,40
KLRBL-092700	24	6	9090171008043	104	8,90	ONH1G-062765	50	10	9090171002744	70	2,40
KLRSC-092700	25	1	9090171008050	95	8,90	ONH1G-081430	50	10	9090171007244	71	4,90
KLS-AR	50	10	9014003050062	213	6,90	ONH1G-081430BL	48	12	9090171008876	82	4,90
KLS-BI	50	10	9014003050048	213	6,90	ONH1G-081440	50	10	9090171007251	71	4,90
KLS-CR	50	10	9014003050055	213	7,90	ONH1G-081465	50	10	9090171008425	71	4,90
KON170	8	1	9090171007503	221	38,00	ONH1G-081465BL	48	12	9090171008883	82	4,90
KPRAN-1818	20	1	9090171009064	143	18,00	ONH1G-082730	50	10	9090171007268	71	4,90
KPRBS-1468	6	1	9090171009217	149	99,00	ONH1G-082730BL	48	12	9090171008890	82	4,90
KPRCA-2711	20	1	9090171009125	147	30,00	ONH1G-082740	50	10	9090171007275	71	4,90
KPRCG-4626	12	1	9090171009187	152	63,00	ONH1G-082765	50	10	9090171008432	71	4,90
KPRCG-5123	12	1	9090171009170	151	63,00	ONH1G-082765BL	48	12	9090171008906	82	4,90
KPRCG-5314	12	1	9090171009163	150	59,00	ONM1-061430	50	10	9021061430095	70	2,40
KPRI-2212	20	1	9090171009033	142	17,00	ONM1-061440	50	10	9090171002751	70	2,40
KPRI-2508	20	1	9090171009019	141	15,50	ONM1-061465	50	10	9090171002768	70	2,40
KPRI-3011	20	1	9090171009088	141	22,00	ONM1-081430	50	10	9090171002386	71	4,90
KPRI40G-2413	20	1	9090171009118	144	26,00	ONM1-081430BL	48	12	9090171008852	82	4,90
KPRIC-4736	100	1	9090171009149	142	96,00	ONM1-081440	50	10	9090171002393	71	4,90
KPRS-1611	20	1	9090171009057	140	8,50	ONM1-081465	50	10	9090171008418	71	4,90
KPRS-1708	20	1	9090171008999	138	14,00	ONM1-081465BL	48	12	9090171008869	82	4,90
KPRS-3537	100	1	9090171009132	145	99,00	ONM1C-061430	50	10	9021061430118	70	2,40
KPRS40G-1713	20	1	9090171009101	144	23,00	ONM1C-061440	50	10	9090171002775	70	2,40
KPRSC-6528	6	1	9090171009194	148	59,00	ONM1C-061465	50	10	9090171002782	70	2,40
KPRSC-8050	6	1	9090171009200	148	72,00	OP-1803050	1	1	9031803050023	354	449,00
KPRSL-5709	10	1	9090171009156	139	30,00	OP-1806050	1	1	9031806050020	354	449,00
KPRVE-4217	10	1	9090171009224	146	39,00	OSOB-1411940	12	1	9090171006483	258	15,90
LLD1P-108040	6	1	9090171006216	279	39,00	OSOBs-1411940	12	1	9090171006476	258	35,00
LLD3P-108040	1	1	9090171006223	279	172,00	OSON-1411940	12	1	9090171006469	258	15,90
LLDAL-108040	6	1	9090171006193	280	29,00	OSONS-1411940	12	1	9090171006537	258	35,00
LLDBA-108040	6	1	9090171006179	280	29,00	OSTOB-1421540	12	1	9090171006506	259	18,90
LLDCA-108040	6	1	9090171006209	281	29,00	OSTOBP-1421540	12	1	9090171006520	259	19,90
LLDSE-108040	6	1	9090171006186	280	39,00	OSTOBPS-1421540	12	1	9090171006575	259	39,00
LNK-321240	10	1	9090171011746	158	105,00	OSTOBS-1421540	12	1	9090171006551	259	39,00
LNK16-321240	10	1	9090171011753	159	139,00	OSTON-1421540	12	1	9090171006490	259	18,90
LNKCN2	1	1	9090171011760	158	7,90	OSTONP-1421540	12	1	9090171006513	259	19,90
LNKCN4	1	1	9090171011777	158	10,50	OSTONPS-1421540	12	1	9090171006568	259	39,00
LNKCNL	1	1	909017101								

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
PAR56-301660	12	1	9090171012132	121	145,00
PAVI-014230	24	6	9090171004748	299	31,00
PAVI-014240	24	6	9090171004755	299	31,00
PAVI-038930	6	1	9090171004885	299	57,00
PAVI-038940	6	1	9090171004892	299	57,00
PAVI-078930	6	1	9090171004908	300	59,90
PAVI-078940	6	1	9090171004915	300	57,00
PAVI-1216030	6	1	9090171004922	300	105,00
PAVI-1216040	6	1	9090171004939	300	105,00
PAVI-GU10	6	1	9090171010220	300	26,00
PAVI1L-047030	24	6	9090171004762	298	16,50
PAVI1L-047040	24	6	9090171004779	298	16,50
PAVI2L-087030	24	6	9090171004786	298	17,90
PAVI2L-087040	24	6	9090171004793	298	17,90
PAVIC2L-0513030	6	1	9090171004823	301	65,00
PAVIC2L-0513040	6	1	9090171004830	301	65,00
PAVIC4L-0513030	6	1	9090171004809	301	65,00
PAVIC4L-0513040	6	1	9090171004816	301	65,00
PER8-150	8	1	9090171006131	251	54,90
PHG-1018030	20	1	9090171007718	268	19,90
PHG-1018040	20	1	9090171007725	268	19,90
PHG-2023030	20	1	9090171007732	268	31,00
PHG-2023040	20	1	9090171007749	268	31,00
PIXYFULL-030430	96	12	9090171000283	92	5,30
PIXYFULL-030930	96	12	9021030930076	93	4,90
PIXYFULL-030940	96	12	9090171009972	93	4,90
PIXYFULL-030964	96	12	9090171004687	93	4,90
PIXYFULL-040930	96	12	9090171000290	93	6,90
PIXYFULL-040940	96	12	9090171010930	93	6,90
PIXYFULL-040964	96	12	9090171010947	93	6,90
PIXYFULL-150430	96	12	9021150430074	92	4,60
PIXYFULL-150440	96	12	9090171009965	92	4,60
PIXYFULL-150464	96	12	9090171004670	92	4,60
PIXYFULL-350930	96	12	9090171000542	93	5,30
PIXYPLT-020430	96	12	9021020430074	92	4,60
PL-406040	10	1	9090171008029	182	39,00
PLC-102440	24	6	9090171000382	108	16,90
PLC-102740	24	6	9090171000399	108	16,90
PLD-051230	12	1	9020605123004	278	50,00
PLD-058030	8	1	9020605803029	278	96,00
PLGU10	1000	10	9090171011630	214	0,95
PLGU53	1000	10	9090171011647	214	0,95
PNY-030040	48	12	9090171010244	318	6,90
PQ-038530	24	6	9090171003154	173	8,50
PQ-038540	24	6	9090171010503	173	8,50
PQ-061230	24	6	9090171003161	173	10,50
PQ-061240	24	6	9090171010510	173	10,50
PQ-091430	24	6	9090171003178	173	13,50
PQ-091440	24	6	9090171010527	173	13,50
PQ-121730	24	6	9020121730106	173	15,50
PQ-121740	24	6	9020121740105	173	15,50
PQ-182230	24	6	9020182230102	173	18,90
PQ-182240	24	6	9020182240101	173	18,90
PQ-243030	12	6	9090171005424	173	26,50
PQ-243040	12	6	9090171003116	173	26,50
PQ42U-426040	6	1	9090171000986	179	79,00
PQA-243030	6	1	9090171002683	175	34,90
PQA-243040	6	1	9090171002690	175	34,90
PQA-421230	6	1	9090171005189	175	55,00
PQA-421240	6	1	9090171002706	175	55,00
PQA-426030	6	1	9090171002676	177	45,90
PQA-426040	6	1	9090171002669	177	45,90
PQA-426060	6	1	9090171004229	177	45,90
PQA-806040	4	1	9090171009293	176	139,00
PQA65-406040	6	1	9090171012064	181	139,00
PQA90-421230	6	1	9090171013160	175	63,90
PQA90-421240	6	1	9090171013153	175	63,90
PQA90-426030	6	1	9090171011920	177	49,90
PQA90-426040	6	1	9090171009866	177	49,90
PQAB-426040	4	1	9090171011937	180	38,00
PQAFM-6060	6	1	9090171004212	187	17,90
PQAN-426040	6	1	9090171004205	178	33,90
PQEL1-3612040	5	1	9090171008104	183	99,00
PQEL2-366040	5	1	9090171007763	184	85,00
PQEL4-606040	5	1	9090171007770	185	125,00
PQP-182240	24	6	9090171003079	193	26,50
PQP-243040	12	6	9090171003093	193	31,00
PQPLF-476240	4	1	9090171007756	194	75,00
PQR-406230	6	1	9090171011425	188	55,00
PQR-406240	6	1	9090171011418	188	55,00
PR-081740	6	1	9090171000207	304	13,90
PRCO-1611	20	1	9090171012071	140	4,50
PRCO-1708	20	1	9090171012095	138	5,50
PRCO-1818	20	1	9090171012101	143	4,50
PRCO-2508	20	1	9090171012088	141	4,50
PRCO-5314	20	1	9090171012118	152	6,90
PRCV-1708	20	1	9090171009002	138	4,90
PRCV-1818	20	1	9090171009071	143	3,50
PRCV-2212	20	1	9090171009040	142	3,50
PRCV-2508	20	1	9090171009026	141	3,50
PRCV-3011	20	1	9090171009095	141	6,00
PRK-183240	6	1	9090171001440	256	53,00
PRKE-183240	6	1	9090171001457	257	105,00
PRKS-183240	6	1	9090171001464	256	76,00
PRL-186030	6	1	9090171011449	189	32,00
PRL-186040	6	1	9090171011432	189	32,00
PRL-361230	6	1	9090171011463	189	48,00
PRL-361240	6	1	9090171011456	189	48,00
PSE-302730	20	5	9090171011708	120	43,00
PSE-302740	20	5	9090171013702	120	43,00

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
PSE-302765	20	5	9090171011715	120	43,00
PSE-402730	20	5	9090171011722	120	59,00
PSE-402740	20	5	9090171013719	120	59,00
PSE-402765	20	5	9090171011739	120	59,00
PT-038530	24	6	9090171003123	170	8,90
PT-038540	24	6	9090171010473	170	8,90
PT-061230	24	6	9090171003130	170	10,90
PT-061240	24	6	9090171010480	170	10,90
PT-091430	24	6	9090171003147	170	13,90
PT-091440	24	6	9090171010497	170	13,90
PT-121730	24	6	9020121730007	170	15,90
PT-121740	24	6	9020121740006	170	15,90
PT-182230	24	6	9020182230003	170	18,90
PT-182240	24	6	9020182240002	170	18,90
PT-243030	12	6	9090171005431	170	26,50
PT-243040	12	6	9090171003109	170	26,50
PTO-209540	24	1	9090171011609	344	23,00
PTO-309540	12	1	9090171011616	344	29,00
PTO-509540	6	1	9090171011623	344	33,00
PTP-182240	24	6	9090171003062	193	26,50
PTP-243040	12	6	9090171003086	193	31,00
PTP-365040	5	1	9090171008395	192	95,00
PTP-486040	5	1	9090171008401	192	115,00
QBBI-109040	24	6	9090171008647	264	31,00
QBBI-1511240	24	6	9090171008654	264	49,00
QBBI-2513140	24	6	9090171008807	264	69,00
QBBI-3516140	24	6	9090171008861	264	93,00
QBBI-059040	24	6	9090171008746	266	36,00
QBNE-109040	24	6	9090171008678	264	31,00
QBNE-1511240	24	6	9090171008685	264	49,00
QBNE-2513140	24	6	9090171008692	264	69,00
QBNE-3516140	24	6	9090171008708	264	93,00
QBNEP-059040	24	6	9090171008753	266	36,00
RADFC	1	1	9090171008098	330	16,50
RBDVS	100	1	9090171007787	293	26,00
RBDVS-05	100	1	9090171009859	293	13,00
RBFCR30	1	1	9090171008074	330	54,00
RBFCRF20	1	1	9090171008081	330	32,00
RBLVT	1	1	9090171007633	294	38,00
RC-SPD	100	6	9090171001433	156	3,50
RDAC35-24	100	1	9090171000849	134	14,50
RDAC60-24	100	1	9090171000856	134	21,50
RDAC100-24	100	1	9020610024006	134	26,00
RDAC120-24	100	1	9090171000863	134	29,00
RDAC150-24	100	1	9090171000870	134	29,00
RDAC200-24	100	1	9090171000887	134	37,00
RDAC50-2467	100	1	9090171013115	134	30,90
RDAC100-2467	100	1	9090171013023	134	54,90
RDAC200-2467	100	1	9090171013030	134	84,90
RDAC300-2467	100	1	9090171013047	134	114,90
RDAC60-2467D	100	1	9090171013115	134	66,90
RDAC100-2467D	100	1	9090171013122	134	109,90
RDAC150-2467D	100	1	9090171013139	134	119,90
RDAC250-2467D	100	1	9090171013146	134	154,90
RDALD-051630	1	1	9090171009767	278	13,00
RDALD-056030	1	1	9090171009750	278	13,00
RDGDN-051530	1	1	9090171009736	278	13,00
RDGDN-058030	1	1	9090171009743	278	13,00
RDPLD-051230	1	1	9090171009781	278	13,00
RDPLD-058030	1	1	9090171009774	278	13,00
RDPQ12	1	1	9090171004977	196	9,50
RDPQ18	1	1	9090171004977	196	9,50
RDPQA24	1	1	9090171005769	196	13,90
RDPQA40	50	1	9090171006438	196	18,00
RDPQA42	1	1	9090171005288	196	26,00
RDPQA42AGT	1	1	9090171011944	196	11,90
RDPQAB42AGT	1	1	9090171012033	196	11,90
RGOD-089030	24	6	9030890300004	236	53,00
RGOD-089040	24	6	9030890400001	236	53,00
RGOD-259030	24	6	9090171005844	236	132,00
RGOD-259040	24	6	9090171005851	236	132,00
RGOD-369030	24	6	9090171005837	236	180,00
RGOD-369040	24	6	9090171005820	236	180,00
RGSD-259040	6	1	9090171002010	238	141,00
RGSD-128030	6	1	9031280300000	239	99,00
RGSD-128040	6	1	9031280400007	239	99,00
RGSD-251130	6	1	9032511300004	239	132,00
RGSD-251140	6	1	9032511400001	239	132,00
RGSD-361130	6	1	9033611300000	239	156,00
RGSD-361140	6	1	9033611400007	239	156,00
RGTD-157040	6	1	9031570400007	238	96,00
RGTD-259030	6	1	9032590300001	238	1

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
RW-708540	4	1	9090171008494	329	79,00
SAP-112727	20	5	9090171008210	114	16,90
SAP-142727	20	5	9090171008227	114	18,90
SAPS-112722	20	5	9090171008234	114	16,90
SAPS-112727	20	5	9090171008241	114	16,90
SAPS-112740	20	5	9090171008258	114	16,90
SAPS-142722	20	5	9090171008265	114	18,90
SAPS-142727	20	5	9090171008272	114	18,90
SAPS-142740	20	5	9090171008289	114	18,90
SAPS-144022	20	5	9090171008296	114	19,90
SCKSMA	50	25	9090171012491	37	29,00
SCL-020340	12	1	9090171009835	205	29,00
SENS1-18044	30	1	9090171006353	243	16,90
SENS2-18044	30	1	9090171006360	243	14,50
SENS3-36044	30	1	9090171006377	243	25,90
SENS4-36020	30	1	9090171006384	243	25,90
SENS5-36020	30	1	9090171006391	243	24,00
SENSDL1-10	100	1	9090171004694	198	59,00
SFC-100040	20	1	9090171008388	319	45,00
SHARKD-1209540	1	1	9090171002294	370	599,00
SHARKD-609540	1	1	9090171002270	370	379,00
SHARKD-909540	1	1	9090171002287	370	449,00
SHPAR20-082730	24	6	9030827300008	233	36,00
SHPAR20-082740	24	6	9030827400005	233	36,00
SHPAR30-152740	24	6	9031527400005	233	57,00
SHPAR38-182730	24	6	9031827300005	233	67,00
SHPAR38-182740	24	6	9031827400002	233	67,00
SHSLIM-109540	24	1	9090171005509	338	12,90
SHSLIM-209540	24	1	9090171005516	338	16,90
SHSLIM-309540	12	1	9090171005523	338	23,90
SHSLIM-509540	6	1	9090171005530	338	35,90
SHSLIS-109540	12	1	9090171005547	338	28,90
SHSLIS-209540	12	1	9090171008180	338	32,00
SHSLIS-309540	6	1	9090171005585	338	39,00
SHSLIS-509540	6	1	9090171005554	338	49,00
SHSOL-109540	8	1	9090171005561	339	165,00
SHSOLS-109540	8	1	9090171005578	339	165,00
SLAR111-124030	50	10	8059617675356	110	13,90
SLDS-042240	24	6	9090171007381	313	13,90
SLPAR20-072730	24	6	9020072730002	111	18,90
SLPAR30-112730	24	6	9020112730009	111	23,90
SLPAR38-162730	24	6	9020162730004	111	32,50
SLV-030040	48	12	9090171010251	318	11,90
SOFFIO180	24	1	9090171007558	229	62,00
SOFFIO230	12	1	9090171007565	229	65,00
SOFFIO320	12	1	9090171007572	229	65,00
SPD-043030	24	6	9090171000702	156	11,90
SPD-043040	24	6	9022043040004	156	11,90
SPD-086030	24	6	9090171000719	156	15,90
SPD-086040	24	6	9022108604004	156	15,90
SPD-109030	24	6	9090171000689	156	17,90
SPD-109040	24	6	9022109040009	156	17,90
SPD-141230	24	6	9090171000696	156	19,90
SPD-141240	24	6	9022114124008	156	19,90
SPD-181540	24	6	9022118154001	156	25,90
SPF-091100	40	10	9090171011081	208	16,50
SPF-141400	40	10	9090171011098	208	21,00
SPF-171700	40	10	9090171011104	208	25,90
SPF-252400	40	10	9090171011111	208	37,90
SPF-351900	10	1	9090171011128	209	48,00
SPFRSMA-121400	20	10	9090171012514	35	54,00
SPFRSMA-181900	20	10	9090171012521	35	75,00
SPFSMA-181900	20	10	9090171012422	35	49,00
SPFSMA-241900	20	10	9090171012439	35	52,00
SPK-032230	30	1	9090171006407	282	36,00
SPPA-106040	9	1	9090171004151	163	22,90
SPPA-181240	9	1	9090171004168	163	33,50
SPPA-241540	9	1	9090171004175	163	42,00
SPPA-361240	9	1	9090171004182	163	45,90
SPPA-481540	6	1	9090171004199	163	56,90
SPPV-361200	10	1	9090171005967	162	24,90
SPPV-481500	10	1	9090171005974	162	29,90
SRP-102840	16	1	9090171005691	341	39,90
SRPR-109510	16	1	9090171005707	341	39,90
SRS-1009540	12	1	9090171011517	343	95,00
SRS-1509540	6	1	9090171011524	343	118,00
SRS-2009540	6	1	9090171011531	343	129,00
SRS-209540	24	1	9090171011470	343	24,00
SRS-309540	24	1	9090171011487	343	28,00
SRS-509540	20	1	9090171011494	343	31,00
SRS-709540	12	1	9090171011500	343	55,00
SRW-158540	4	1	9090171005455	327	85,00
STAND50	5	1	9090171007343	356	21,50
STB-186030	6	1	9090171001501	157	25,90
STB-186040	6	1	9090171001518	157	25,90
STB-361230	6	1	9090171001525	157	39,90
STB-361240	6	1	9090171001532	157	39,90
STB-451530	6	1	9090171001587	157	54,90
STB-451540	6	1	9090171001594	157	54,90
STD-50013040	1	1	9090171009675	355	1,390,00
STD500-LASER	10	1	9090171009705	355	132,00
STD500-LENS30	10	1	9090171009682	355	41,00
STD500-LENS45	10	1	9090171009712	355	41,00
STD500-LENS80	10	1	9090171009699	355	41,00
STYLOBI500-053340	24	6	9090171008784	267	36,00
STYLOBI600-032540	24	6	9090171008760	267	29,00
STYLONE500-053340	24	6	9090171008791	267	36,00
STYLONE600-032540	24	6	9090171008777	267	29,00
SWSMA-1	1	1	9090171012460	36	45,00
SWSMA-2	1	1	9090171012477	36	49,00

Product code	Master Carton pcs	Inner Carton pcs	EAN code	Page	Price €
SWSMA-3	1	1	9090171012484	36	55,00
TMY-062540	50	10	9090171007367	315	5,50
TR-1511830BL	24	6	9090171011975	98	16,90
TR-1511840BL	24	6	9090171011982	98	16,90
TRD-1211830BL	24	6	9090171011999	98	21,00
TRD-1211840BL	24	6	9090171012002	98	21,00
TRIP0D160	6	1	9090171007091	356	31,00
TRS-057830	24	6	9090171009927	99	8,90
TRS-057830BL	24	6	9090171009941	99	8,90
TRS-0811830	24	6	9090171009934	99	11,50
TRS-0811830BL	24	6	9090171009958	99	10,90
TRY-030040	24	12	9090171007138	312	6,90
UDBI-068030	20	10	9090171006230	269	49,00
UDBI-068040	20	10	9090171006247	269	49,00
UDGR-068030	20	10	9090171006254	269	49,00
UDGR-068040	20	10	9090171006261	269	49,00
UDNE-068030	20	10	9090171006278	269	49,00
UDNE-068040	20	10	9090171006285	269	49,00
VS-853830	40	10	9038538300003	236	36,00
VS-853840	40	10	9038538400000	236	36,00
VTV-052427	200	50	9090171012163	96	2,00
ZH-101230	24	6	9014101230014	97	19,90
ZTD-605240	1	1	9090171006414	371	349,00

General terms of sale

GENERAL INFORMATION

The general terms of sale below are valid for any order received from our Company and they are an essential part of each order. Any change to these clauses and any particular condition must be expressly agreed in writing.

ORDERS

Orders acquired by our sale team are subject to our Company approval. Orders received with quantities less than the listed standards will be automatically rounded to the minimum packaging, otherwise they will not be managed.

TRANSPORTATION

The goods travel is at Client risk. It's in his own interest to check, before withdrawal, the integrity of packages and quantity of received goods. Any complaint must be made directly to the carrier at delivery time and communicated to our Company, as stated in the chapter "Complaints".

DELIVERY

The terms of delivery are purely indicative and have no contractual value. The shipment is carried out only with our trusted couriers. The delivery is intended to be made at the time the goods are delivered to the carrier. The delivery of the goods with emergency procedures and/or hydraulic bank, will be carried out only after acceptance by the Client of the additional cost related to the requested service. At delivery time, the Client undertakes to check immediately the quantitative compliance and integrity of the received packages as mentioned on Transport Document and the packing-list, even for deliveries with filmed pallets.

WARRANTY

Our Company guarantees that the products are free of manufacturing defects for a period of 2 years from the date of delivery to the Client.

The warranty will not cover products whose defects are due to:

- I. Damage caused during transport; (except what is described in the "Complaints" chapter).
- II. Lamps with broken glass (except what is described in the "Complaints" chapter).
- III. A negligent or improper use;
- IV. Non-compliance with the instructions of our Company regarding the use, maintenance and preservation of products;
- V. Repairs or changes made by the Client or third parties without the prior written permission of our Company.
- VI. In any case, the Client will not be able to claim the warranty rights to our Company if the price of the products has not been paid under the agreed terms and conditions, even if the non-payment refers to products different from those for which the Client intends to make guarantee. Our Company does not recognize any guarantee regarding products compliance with the rules and regulations of countries not belonging to the European Union.

COMPLAINTS

As long as the Client complaint is covered by the warranty and notified in the below terms, our Company will undertake at its discretion to replace or repair each defective product or component. Any written complaint must be received by our Company within 8 days from delivery. Complaints about quantitative differences or damaged packages, or for broken lamps, should be highlighted on the Transport Document and the courier's letter. Any other way will be not accepted.

RETURNS

All defective products can be returned after our permission only. Naturally it is necessary a first evaluation or check, then instructions from our Company to make the return will follow. Authorized returns must be sent to our warehouses with Transport Document and related purchase details. Products that have been used, even partially, cannot be considered defective; in this case, the convenience of replacing the damaged component will be evaluated, at Client cost. It should be noted that the term "defective" means any product that has not been used and has obvious manufacturing and/or operating anomalies.

Broken glass lamps do not fall within the field of defectiveness. Other products can be returned by our permission only, freight prepaid, as communicated by the claim's office at the time of the request. The price paid for the product will be refunded except 10 % charged for control, repackaging and repositioning in stock. Requests for returns of goods delivered more than 24 months before the claim will not be considered.

PAYMENTS

Payments must be made to our Company at the fixed deadline for the agreed amount and addressed only to our administrative headquarters. In the event of a delay in the payment, even partial, beyond the agreed deadlines, the Company reserves the right to suspend subsequent deliveries of goods. Bank fee will be counted for the delay on the agreed payment according to the current legal arrangements.

PROPERTY OF GOODS

Our Company remains the owner of the goods until the full payment by the Client.

SIZES AND DESIGNS

Technical drawings related to the construction of products, dimensions, technical and/or photometric characteristics on any publication of our Company, have to be understood as informational and may be subject to change without any notice. For the latest product information, visit: www.century-italia.com.

RESPONSIBILITY

The products must be used and/or installed in accordance with their technical characteristics and instructions, in accordance with the safety regulation in the country of use and/or installation. Our Company disclaims any liability for any damage that may, directly or indirectly, result from people, things and pets, as a result of non-compliance with all the requirements stated on the products and/or instructions for use and/or for installation. Our Company also disclaims any responsibility if the products are used for special applications, or installed in locations for which scaffolding, beams or cranes are required; costs of uninstallation or replacement, in case of any product defect, are therefore not charged by our Company.

INTELLECTUAL PROPERTY

Our Company reserves the rights, title and intellectual property on documents, drawings, photographs and datasheets provided to the Client.

The Client can't use this documentation – without prior written permission from our Company – for the creation of its own catalogues, promotional flyers, websites or any other means of dissemination and/or advertising.

PLACE OF JURISDICTION

For every dispute that arises between our Company and the Client, the place of jurisdiction is intended to be the Seller's one.

Symbology



Device manufactured according to the European directives EMC 2014/30/EU – LVD 2024/35/EU and subsequent amendments.



European legislation 2011/65/EC which limits the use of hazardous substances in the production of electrical and electronic equipment.



Legislative Decree 14th March, 2014, n.49 (Directive RAEE 2012/19/UE). It provides that the products at the end of their useful life must be subject to separate collection.



TÜV-/GS tested product complies with the minimum requirements established by the law on the safety of equipment and products.



Suitable device to be installed on flammable surfaces.



It can be installed in devices equipped with dimmers or regulated by external dimmers.



The 1-10V dimming system allows you to vary the amount of light emitted by a source by varying the voltage in the range from 1 to 10V.



Unified Glare Rating (UGR) is a unified factor developed for the assessment of direct glare for each specific application.



Unified Glare Rating (UGR) is a unified factor developed for the assessment of direct glare for each specific application.



Device equipped with main insulation provided with a device for connecting the masses to a protection conductor.



Device equipped with double insulation designed so that it does not require (and therefore do not need) grounding connection. It is built so that a single failure cannot cause contact with dangerous tensions by the user.



Protection against electrocution, there are no tensions higher than the very low SELV safety voltage. It does not require grounding.



Protected against the entry of solid objects larger than 12 mm (e.g. a finger). Not protected from liquid access.



Protected against the entry of solid objects larger than 1 mm (e.g. wires, tools). Not protected from liquid access.



Protected against the entry of solid objects larger than 1 mm (e.g. wires, tools). Protected against drops of water or rain up to 15° from the vertical.



Protected against the entry of solid objects larger than 1 mm (e.g. wires, tools). Protected against water sprayed from an angle within 60°.



Protection against penetration of solid bodies greater than 1 mm. Protection against the penetration of liquids from drops, vapours or sprays in any direction. The penetration of solid bodies less than 1 mm and liquids should not damage the equipment.



Dust protection that does not interfere with the operation of the device. Atmospheric depression 200mm water column. Airflow is 80 times the volume of the case. Protected against splashes of water from any direction.



Completely protected from dust and fumes. Protected against pumped water jets from any direction.



Totally protected against dust; sand and in general any small solid body; temporary immersion (dipped between 15cm and 1m for at least 30 minutes, must not have condensation or infiltration).



Protected against shock energy 0.35J



Protected against shock energy 0.70J



Protected against shock energy 1J



Protected against shock energy 2J



Protected against shock energy 5J



Protected against shock energy 20J



EVER CLOSER, ALWAYS IN TOUCH.

Our social networks are a useful space where we can interact daily with our customers, with information that tells a lot about our products and more.

On **Facebook** and **Instagram**, in fact, through posts with different shapes and contents, we convey the values on which CENTURY is based. Contents that catch the attention of users, informing them about everything related to our daily business.

Images and videos that tell a lot about us and instil quickly and capillary the enthusiasm that always distinguished us.

More than 10 thousand fans every day come into contact with CENTURY world and more than one and a half million people have been reached by our creative ideas, in addition to hundreds of monthly requests related to our products.



@CenturyItaliaLed



@CenturyItalia



CENTURY ITALIA S.R.L.

Strada Tor Tre Ponti n.68 - 04100 - LATINA - ITALY
Tel. +39 0773 24 27 08 - +39 0773 24 47 68 - Fax +39 0773 24 27 09
www.century-italia.com - info@century-italia.com