

SYLVANIA

SYLVANIA

Professional Collection 2021

Architectural and specification lighting

Architectural and specification lighting

Professional Collection 2021

Feilo Sylvania International Group
Duna Tower
Népfürdő Street 22
1138 Budapest, Hungary
T: +3618805900
E: info.cee@sylvania-lighting.com



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited.
Copyright Feilo Sylvania Europe Limited November 2020

sylvania-lighting.com

A Feilo Sylvania Company

Light your world



Light your world

At Sylvania we empower people to control their environment, giving them the freedom to grow, think, work, play; to live and to focus on the things that matter.

Bringing light to life, we've got it covered

Our Products

START TM eco

Sylvania's simple, cost effective, 3 year warranty trade range for energy efficient lighting of commercial and residential premises.

START TM

Sylvania's contractor focused 5 year warranty range for a wider choice of applications including commercial and industrial.

SYLVANIA

Sylvania are one of the world's leading light specialists. Not only do we design and manufacture lighting solutions, we push the boundaries of technology and strive to innovate in everything we do. Our specification luminaires range offers the choice, functionality and flexibility to meet your individual project requirements.

Concord

Concord luminaires by Sylvania provide one of Europe's most respected architectural lighting ranges for high specification architectural lighting. With a strong manufacturing base in the UK, Concord luminaires are renowned for their influential design ethos, high technical performance and aesthetic form.

TRADE AND INSTALLER COLLECTION



Fast, simple,
cost effective lighting
2021

PROFESSIONAL COLLECTION



Architectural and
specification lighting
2021

SYLVANIA

For over 100 years Sylvania has been an innovator in lamps technology. The company was the first to establish mass production of fluorescent lamps and invented the first dichroic reflector. We continue to invest in our research centres and LED technologies to stay at the forefront of the replaceable light source industry in the coming decades.

LAMPS RANGE




Lamps
Catalogue 2021

Our Solutions

SylSmart Intelligent Lighting Control

Sylvania's smart lighting control system, SylSmart allows users to harness light like never before. Light can be controlled throughout an entire room or building, ensuring incredible flexibility in lighting control, combined with maximum energy efficiency. SylSmart solutions are rapidly installed, easy to commission and fully customisable to tailor the light to your needs

WIRELESS CONTROL SYSTEMS

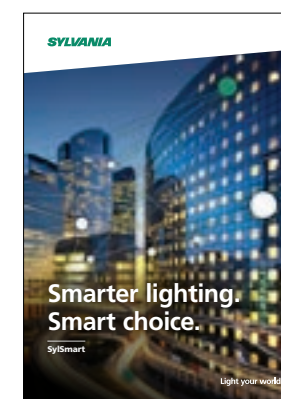


For full details on our
Sylsmart Controls systems
please visit
sylvania-lighting.com/sylsmart

YourHome

Sylvania's YourHome range is designed with the consumer in mind. We supply the perfect luminaire or lamp for every home application. From creating a warm ambient light in the living room to a productive, functional atmosphere in the home office, all of our solutions are shaped around the flexibility required by our customers to light their homes to their individual tastes.

CONSUMER RANGE

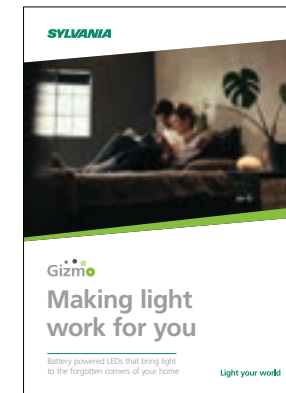


For full details on our
consumer products, such
as LED Pipe, Sylmirror,
Gizmo Indoor and Gizmo
Outdoor - please visit
sylvania-lighting.com

SmartServices for complete peace of mind

Smart Services are designed to compliment Sylvania's comprehensive range of light fixtures, both indoor and outdoor, providing a total solution service. Our services will take your project through the required steps from conception, and energy audit, all the way to completion plus commissioning, via all the required key stages including project financing with Smarter Finance

LIGHTING SERVICES PORTFOLIO

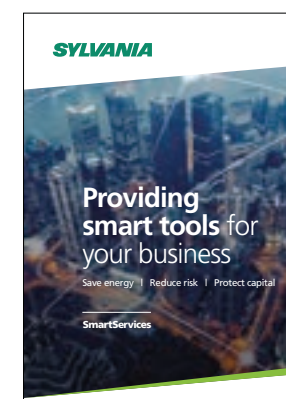

For full details on our
SmartServices portfolio
please visit
sylvania-lighting.com/smart-services

Providing smart tools for your business

Without regular maintenance light levels can fall by up to **30%** 30% in 2-3 years, leading to more lights being turned on to compensate.

Smart Services are available for all projects, however large or small, and can be used in any combination.

To access Smart Services simply speak with your local Sylvania representative or visit: sylvania-lighting.com/smart-services for more information.



Smart Services can assist you in delivering your projects on time whilst achieving energy efficiency, carbon savings, compliance, piece of mind or simply discovering what is actually in your estate.

Audit
This can be as simple as creating an asset register, to as critical as ensuring Emergency Lighting compliance. A Sylvania Audit can also discover the opportunities for your business to make efficiency gains and savings.

Design
What's best for your project? Where do the fixtures need to go? Is my Emergency Lighting in the right place? Use the Sylvania Design service to provide you with a professional lighting design and all the associated outputs.

Turnkey installation
As a 'one stop shop' Sylvania will Project Manage your project, install the new lighting equipment, remove and recycle the old equipment and ensure your new equipment is setup, optimised and customised to suit your operation.

Commissioning
You've got your new lighting infrastructure – ensure that it is setup in the most efficient manner, it is compliant or just have some changes made, following a change in layout – use the Sylvania Commissioning option.

Measurement & Verification
Our M&V service captures the real time energy consumption of your premises existing and new lighting solution. Verifying actual savings compared to proposed ROI. Through the remote M&V tool it is possible to oversee your site: detect anomalous working, receive notifications and reports. The power is in your hands!

Maintenance
Keep your infrastructure in tip top condition; ensure continued compliance and efficient operation.

A smart solution for every need

SylSmart

Smarter Lighting. Smart Choice.

"Smart Lighting dramatically changes the traditional use of lighting and paves the way for new opportunities"

EDWARD LEES
Head of Technical Product Development
Smart Lighting

Key benefits:

-  **No new cables, no disruption**
wireless technology making installation easy
-  **Easy programming**
intuitive tools put power back into your hands, no engineers needed
-  **High flexibility**
customise your system to get the light you want
-  **Hassle-free operation, low maintenance**
highly flexible intelligent lighting control features manages it all for you
-  **Abundant energy savings**
highly intelligent – will deliver massive savings and enable access to energy efficiency certificates for your building
-  **Redundancy & reliability**
decentralised intelligence ensuring no single point of failure
-  **Designed with security built in**
user access controlled and highly encrypted
-  **Future proof**
always up-to date & upgradeable



For more information go to sylvania-lighting.com/sylsmart

sylvania-lighting.com

SylSmart Standalone

MAXIMUM CONTROL. MINIMUM INSTALLATION.

Multifunctional & easy to control
ideal for smaller applications

Advantages: extremely versatile, intuitive & fast configuration through the app, grouping & scheduling, colour control, daylight linking tunable white, occupancy control – all at touch of button using self powered & energy harvesting wall switch

APPLICATION: SUITS SMALL AREAS IN MOST BUILDINGS, OFFICE, EDUCATION, RETAIL, HOSPITALITY, LOGISTIC OR INDUSTRY SPACES

Standalone

SylSmart Connected Building

LIGHTING INTELLIGENCE MADE EASY

Modular, scalable and secure – luminaire integrated control system optimised for multiple interconnected rooms in buildings

Advantages: no additional wires or hardware required, floorplan based pre-configuration remotely through cloud, rapid app-based on-site setup and optimisation, personalised lighting experience, interoperable platform for IoT and BMS Integration

APPLICATION: COMMERCIAL OFFICE, DATA CENTERS, HEALTHCARE, EDUCATION

Connected

SylSmart Connected Industry

CONTROL OPERATIONAL COST THROUGH LIGHTING.

Secure & robust – designed for tough environments in larger scale warehouse or industry

Advantages: insight into how your building operates with real time energy metering, status monitoring, floor plan view, scheduling & notifications; energy efficiency thanks to advanced grouping & daylight management delivering impressive savings up to 90% & ROI in less than 3 years

APPLICATION: WAREHOUSES, STORAGE ROOMS, FACTORIES, PRODUCTION LINES

Connected

SylSmart Beyond

OPEN YOUR MIND TO THE IoT POSSIBILITIES.

Data driven efficiency – futureproof lighting infrastructure that delivers value beyond light itself

Advantages: location based services, energy monitoring, emergency response, occupancy analytics and maintenance planning

APPLICATION: APPLICABLE IN ANY SEGMENT WHERE DATA VISUALISATION, CONTROL & INTEGRATION ARE ESSENTIAL

Beyond



ICON LIBRARY

 WARRANTY	Warranty Warranty period in years		New Please enquire regarding stock availability		Coming soon Preliminary technical data Please enquire for availability
	Non Dimmable Product is not dimmable		Mains Dim Product is mains dimmable		Dim To Warm Colour warms when dimmed
	Switch Dim On-board dimming option		Dual Tone White Adjustable from warm white to cool white via on-board switch		1-10V 1-10V dimming option available
	DALI DALI dimming option available		Smart Wireless Control Enabled SylSmart		Tunable White Customized white light via external control
	RGB RGB colour change option available		RGBW RGBW colour change option available		Microwave Microwave sensor option available
	PIR There is a PIR sensor option available		IP Rating Ingress protection against dust and liquid <i>* Rating behind ceiling void is IP20</i>		IK Rating Level of impact protection
	SDCM SDCM rating for measurement of colour consistency		UGR Glare rating is UGR <16 or <19 or above		CRI Colour rendering index levels
	Beam Angle Angle of light distribution		Tilt Angle Angle in which the fixture can be tilted		Rotation Angle Angle in which the fixture can be rotated
	Insulation Class I Protection against electric shock by protective earthing		Insulation Class II Protection against electric shock by double or reinforced insulation, but no protective earth		Insulation Class III Protection against electric shock by using power supply with safety extra-low voltage
	Emergency 3 hour emergency versions		CE Conforms to European regulations		EAC Conforms to Eurasian regulations
	Max Ambient Temp. Maximum environmental temperature		Cut Out Dimension of cut out required to install product		Energy Class Energy efficiency category
	Without Lamp Product comes without lamp		Coolfit Lamp ensures overheat and overtemperature protection		Fire Rated Certified to 30, 60, 90 minutes

IP RATING

Level of protection from solid and liquid materials

0	No special protection	0	No special protection
1	Protection from solid objects greater than 50mm in diameter, such as a hand.	1	Protection against condensation
2	Protection against objects not greater than 80mm in length and 12mm in diameter	2	Protection against water droplets deflected up to 15° from vertical
3	Protection from solid objects greater than 2.5mm or more	3	Protection against spray up to 60° from vertical
4	Protection against solid objects larger than 1mm	4	Protection against water spray from all directions
5	Protection against dust that may harm equipment	5	Protection against low pressure water jets from all directions
6	Totally dust-tight	6	Protection against high pressure water jets and waves
7		7	Protection against temporary immersion
8		8	Protection against prolonged effects of submersion under pressure. Submersion depth to be specified.*

IP66

IK RATING

Level of protection against mechanical impacts.

00	Not protected
01	Protected against 0.14 joules impact.
02	Protected against 0.2 joules impact.
03	Protected against 0.35 joules impact.
04	Protected against 0.5 joules impact.
05	Protected against 0.7 joules impact.
06	Protected against 1 joules impact.
07	Protected against 2 joules impact.
08	Protected against 5 joules impact.
09	Protected against 10 joules impact.
10	Protected against 20 joules impact.



PRODUCT CATEGORIES



PANEL & RECESSED MODULAR

SYLVANIA Optix Recessed	14
SYLVANIA Optix Linear Recessed	15
Concord Lytepanel	16
Concord Pixer	17



SURFACE & SUSPENDED

SYLVANIA Optix Surface	18
SYLVANIA Optix Linear Surface	19
SYLVANIA Optix MPO Surface	20
SYLVANIA Optix 4 Cells	21
Concord Curvelyte	22
Concord Colossal	23



PENDANT

Concord Myriad Pendant	24
Concord TubiXX	25



ARCHITECTURAL DOWNLIGHTS

Concord Ascent 50	26
Concord Ascent 100	27
Concord Ascent 150 II	28
Concord Ascent 150 II Wallwash	29



SPOTLIGHTS

Concord Domino	30
----------------	----



SURFACE

Concord Pixer Wall	31
--------------------	----



ARCHITECTURAL TRACKLIGHTS

Concord Tide	32
Concord Beacon LED	33
Concord Beacon LED XL	34
Concord Beacon LED XXL	35
Concord Beacon Accent	36
Concord Beacon Accent XL	37



TRACK

Concord Lytespan I	48
Concord Lytespan III	50



EMERGENCY

START eco Emergency Bulkhead	52
START eco Emergency Exit	53
START eco Emergency Spot	54
SYLVANIA SylSafe Spot	55
SYLVANIA SylSafe Exit	56
SYLVANIA SylSafe N-Light	58
SYLVANIA SylSafe Bay	59
SYLVANIA SylSafe Twin	60
SYLVANIA Routled II	61



ROADWAY LIGHTING

SYLVANIA Skyline Street	62
Concord Skyline LED	63

SERVICES

Smart Solutions	xx
-----------------	----


APPENDIX

Ordering Guide	64
----------------	----

All lumen values based on 4,000K CCT unless otherwise stated.




SYLVANIA Optix Recessed

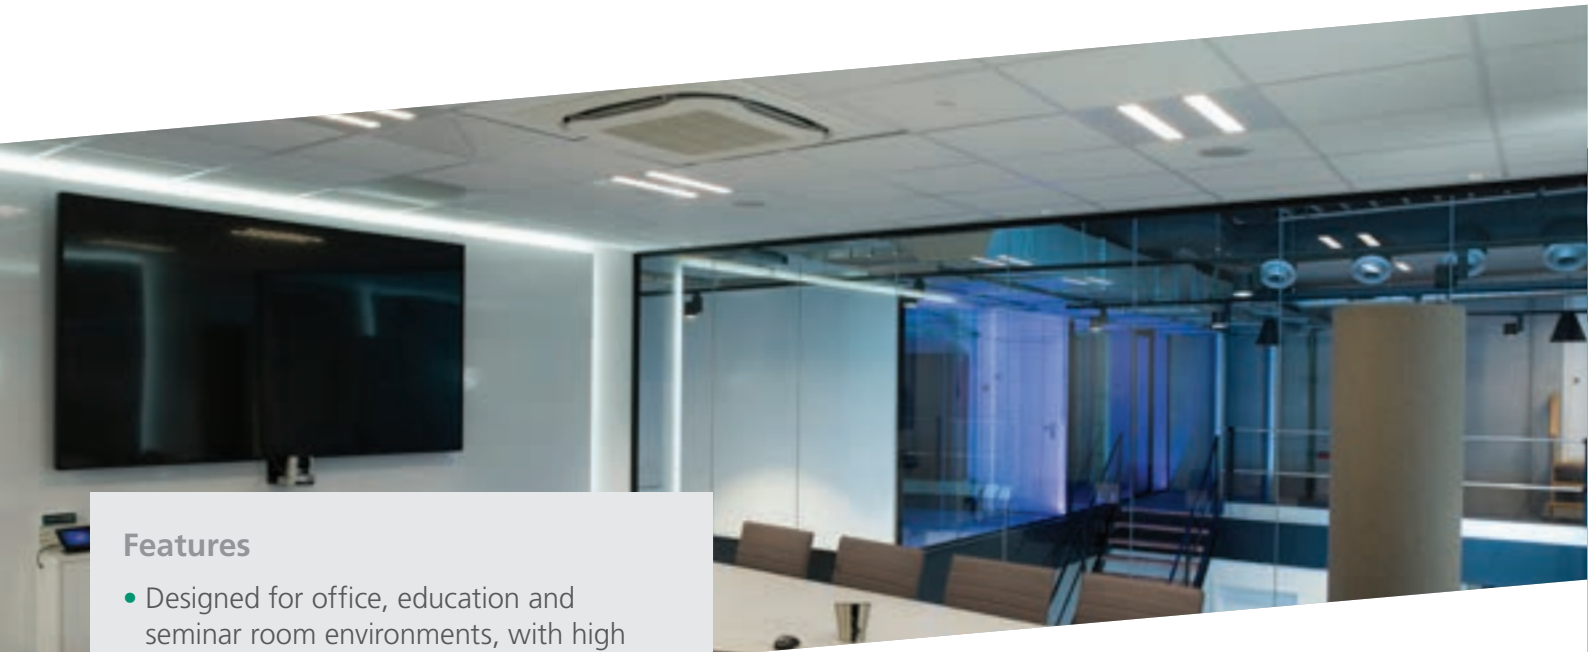

Features

- Designed for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 147lm/W
- Glare control optics available in two finishes (UGR<16 with aluminised optics, UGR<19 with white optics)
- Modular design allows for a range of sizes to suit the building layout
- Low LED flicker <5%
- Available in 3,000K or 4,000K
- Long lifetime: 70,000 hours

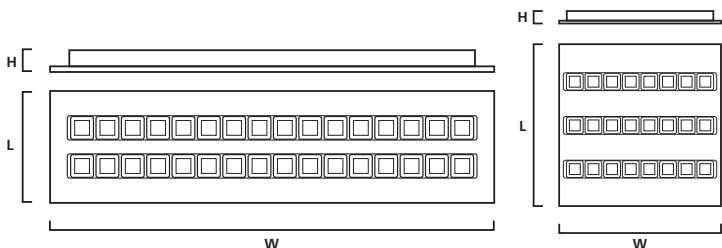

Size (W x L x H)	Wattage	Lumen	UGR
600mm x 600mm x 38mm	21W	2,800lm	<16
600mm x 600mm x 38mm	20W	2,850lm	<19
600mm x 600mm x 38mm	26W	3,400lm	<16
600mm x 600mm x 38mm	23W	3,350lm	<19
600mm x 600mm x 38mm	33W	4,500lm	<16
600mm x 600mm x 38mm	31W	4,550lm	<19
625mm x 625mm x 38mm	26W	3,600lm	<16
625mm x 625mm x 38mm	24W	3,450lm	<19
1200mm x 300mm x 38mm	26W	3,600lm	<16
1200mm x 300mm x 38mm	24W	3,450lm	<19
1250mm x 310mm x 38mm	26W	3,600lm	<16
1250mm x 310mm x 38mm	24W	3,450lm	<19




SYLVANIA Optix Linear Recessed




Features


- Linear lighting for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 131lm/W (4,000K - CRI80)
- Glare control optics available in two finishes (UGR <16 with aluminised optics, UGR <19 with white optics)
- Modular design allows for lengths to be joined to suit the building layout
- Continuous line mounting and through wiring options available with accessories
- Low LED flicker <5%
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours

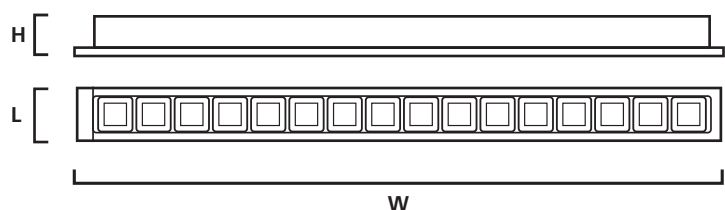

Size (W x L x H)	Wattage	Lumen	UGR
1200mm x 90mm x 89mm	26W	3,400lm	<19

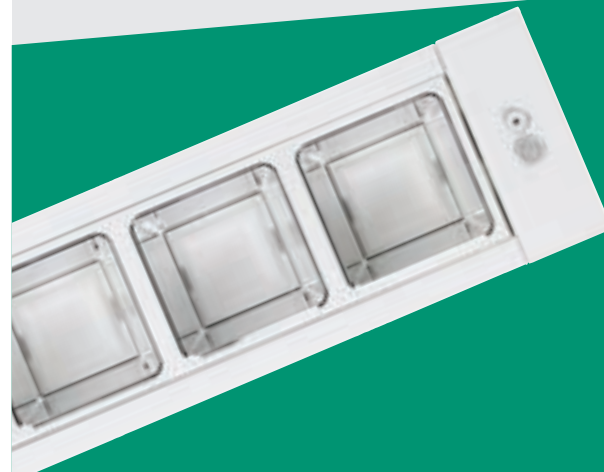


Concord Lytepanel

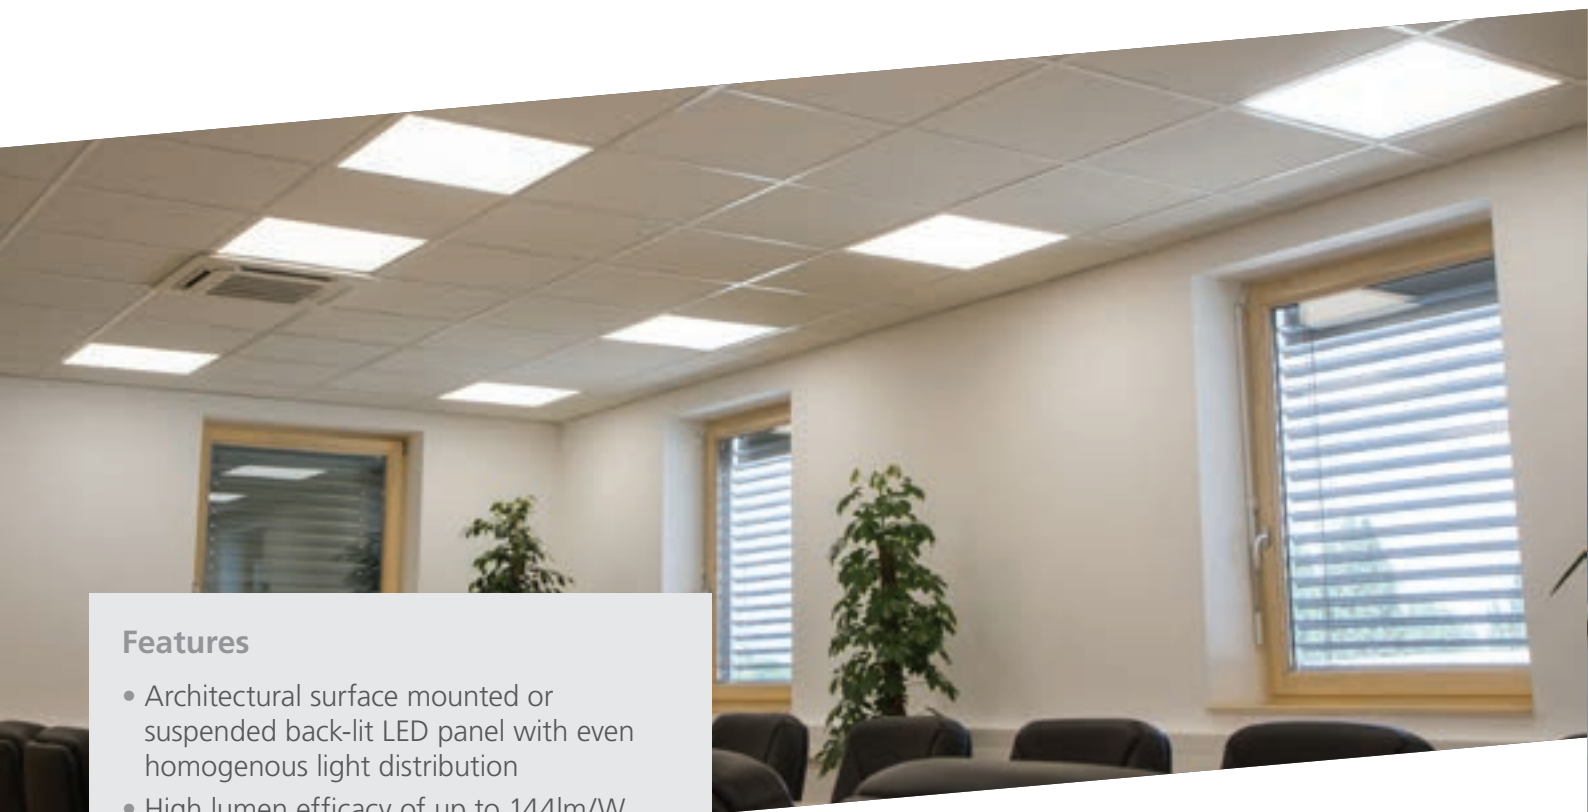

Features


- Architectural surface mounted or suspended back-lit LED panel with even homogenous light distribution
- High lumen efficacy of up to 144lm/W
- Uses latest technology of reflector and highly transmissive LED diffuser material to maximise output
- Suspension kits available as accessory
- Available in 3000K or 4000K
- Long lifetime: 60,000 hours

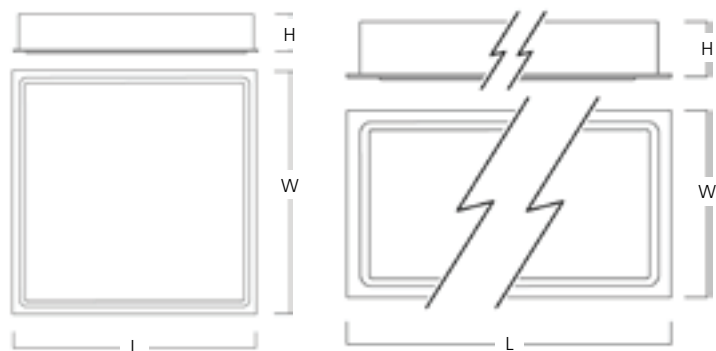

Size (L x W x H)	Wattage	Lumen
595mm x 595mm x 95mm	31W	3,870lm
620mm x 620mm x 95mm	31W	3,870lm
1195mm x 295mm x 95mm	31W	3,542lm
1245mm x 307mm x 95mm	31W	3,542lm
610mm x 650mm x 95mm	31W	3,870lm
1260mm x 310mm x 95mm	31W	3,542lm




Concord Pixer

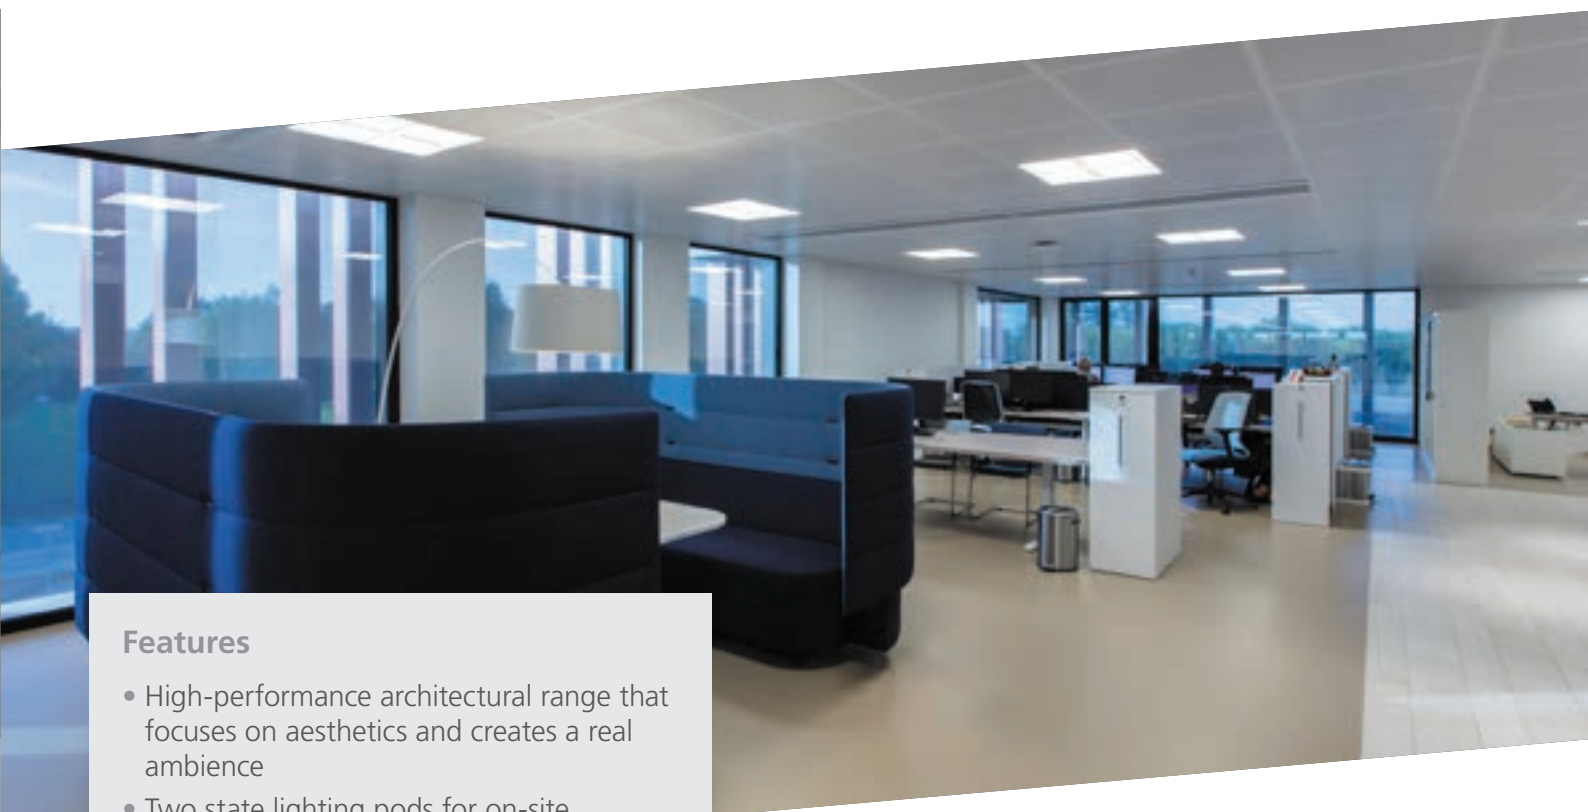

Features

- High-performance architectural range that focuses on aesthetics and creates a real ambience
- Two state lighting pods for on-site appearance settings
- Modular architecture allows for quick customisation
- 3 hour combined maintained and central battery emergency lighting
- Available in 3000K, 4000K or Tunable White
- Long lifetime: 50,000 hours

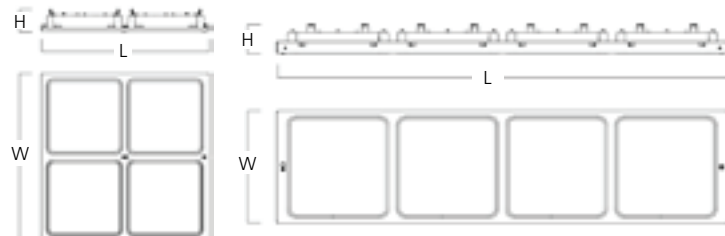

Size (L x W x H)	Wattage	Lumen
595mm x 595mm x 75mm	25W	3,750lm
620mm x 620mm x 75 + 20mm	25W	3,750lm
1195mm x 295mm x 75mm	25W	3,700lm
1245mm x 307mm x 75 + 20mm	25W	3,700lm




SYLVANIA Optix Surface & Suspended




Features

- Perfect for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 160 lm/W
- Surface and Suspended mounted versions of the Optix family
- Suspended luminaires available with Direct / Indirect lighting for visual comfort
- Low LED flicker <5%
- Glare control optics available in two finishes (UGR<16 with aluminised optics, UGR<19 with white optics)
- Available in 3,000K or 4,000K
- Suspension accessories are separately available based on installation needs
- Continuous line mounting and through wiring options available with accessories
- Long lifetime: 100,000 hours

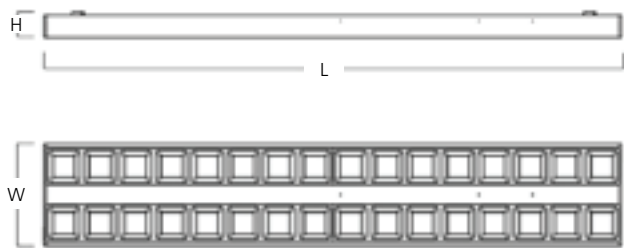


Size (W x L x H)	Lighting Distribution	Wattage	Lumen	UGR
1130mm x 200mm x 50mm	D	26W	3,600lm	<16
1130mm x 200mm x 50mm	D	23W	3,600lm	<19
1130mm x 200mm x 50mm	D/I	29W	4,100lm	<16
1130mm x 200mm x 50mm	D/I	25W	4,100lm	<19
1130mm x 200mm x 50mm	D/I	36W	5,600lm	<16
1130mm x 200mm x 50mm	D/I	35W	5,600lm	<19
1410mm x 200mm x 50mm	D/I	49W	7,000lm	<14
1410mm x 200mm x 50mm	D/I	44W	7,000lm	<19

SYLVANIA Optix Linear Surface & Suspended

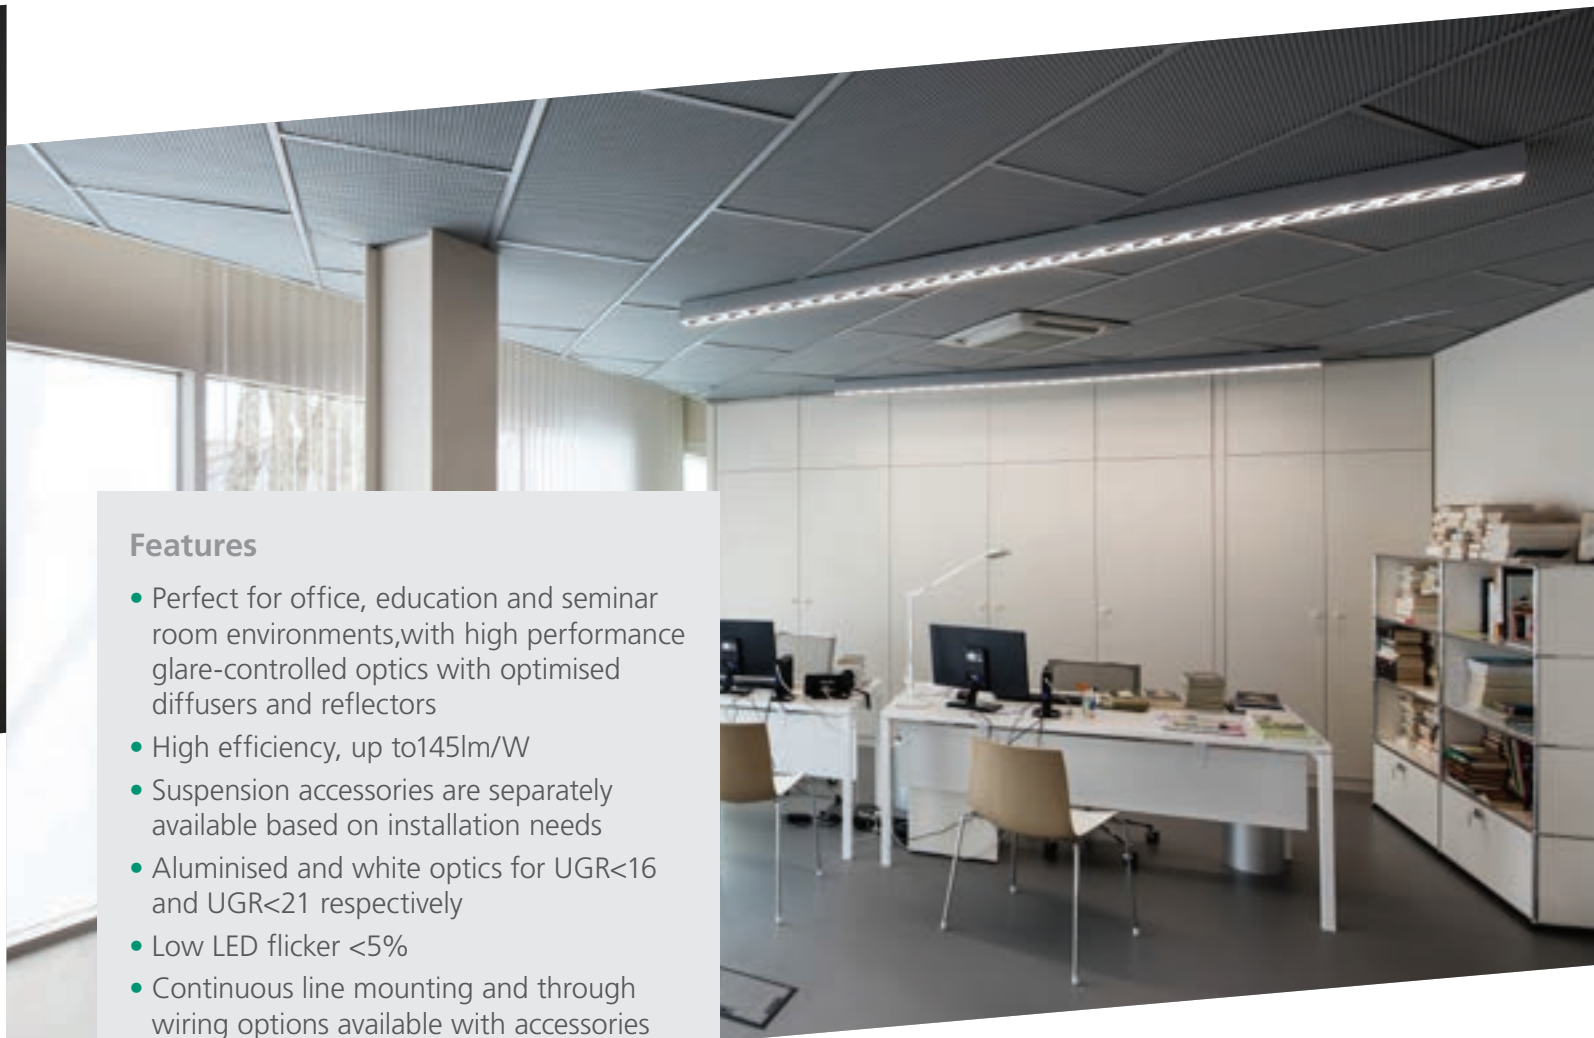

Features

- Perfect for office, education and seminar room environments, with high performance glare-controlled optics with optimised diffusers and reflectors
- High efficiency, up to 145lm/W
- Suspension accessories are separately available based on installation needs
- Aluminised and white optics for UGR<16 and UGR<21 respectively
- Low LED flicker <5%
- Continuous line mounting and through wiring options available with accessories
- Mechanical, suspending and through wiring accessories available on request
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours

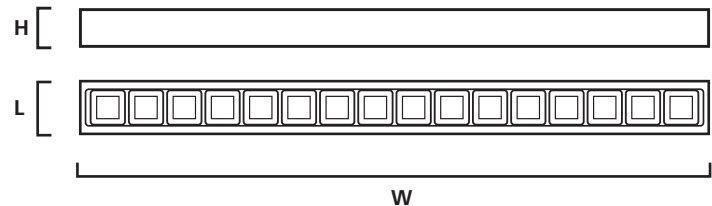


Size (W x L x H)	Lighting Distribution	Wattage	Lumen	UGR
1130mm x 90mm x 86mm	D	26W	3,400lm	<16
1130mm x 90mm x 86mm	D/I	31W	4,500lm	<16

SYLVANIA


Optix MPO Surface & Suspended

5 Year

WARRANTY

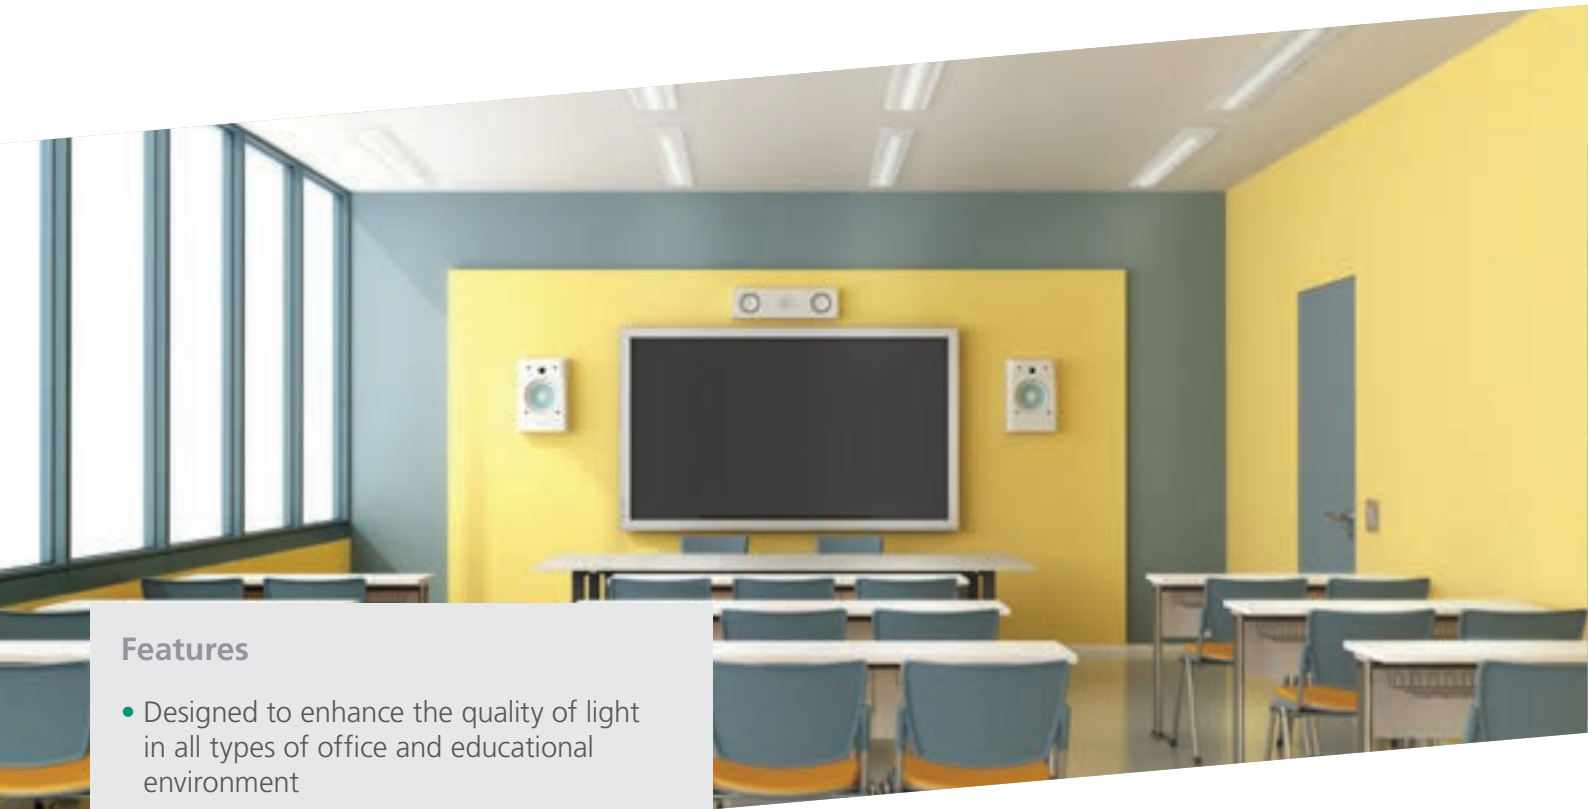

- Features**
- Designed to enhance the quality of light in all types of office and educational environment
 - High efficiency, up to 136lm/W
 - UGR<19 for Direct/Indirect and Direct standard output
 - Direct and Direct/indirect light distribution
 - Standard and high lumen option up to 5750lm
 - Body: sheet steel painted white (RAL9016)
 - Optic: micro-prismatic acrylic diffuser
 - Available in 4,000K
 - Long lifetime: 100,000 hours

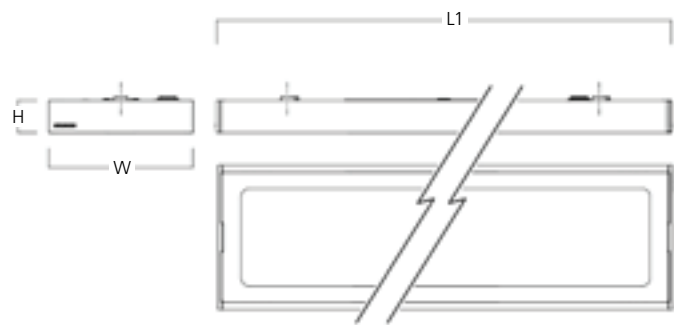

Size (L x W x H)	Wattage	Lumen	UGR
1200mm x 200mm x 50mm	23W	2,863lm	<19
1200mm x 200mm x 50mm	30W	3,550lm	<19
1200mm x 200mm x 50mm	36W	4,990lm	<19
1200mm x 200mm x 50mm	44W	5,770lm	<19



For ordering guide please visit page 74.


sylvania-lighting.com

SYLVANIA



Optix 4 Cells

5 Year

WARRANTY

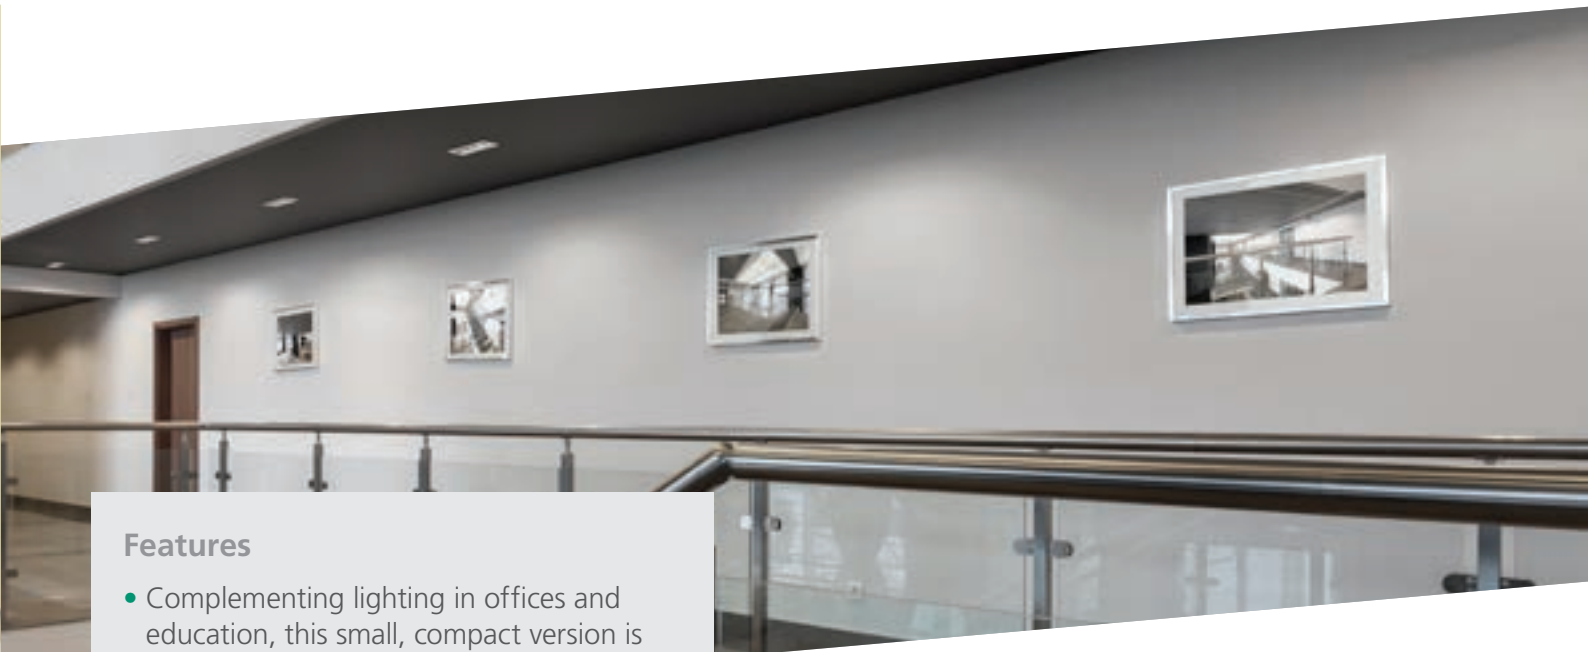

- Features**
- Complementing lighting in offices and education, this small, compact version is ideal for lighting perimeters and smaller spaces. High efficiency, up to 122lm/W
 - High quality steel housing, plastic optical unit and reflector
 - Optics available in two finishes (office compliant UGR<18 with aluminised optics, white optic makes lighting more visible for a brighter ceiling)
 - Modular design allows for a range of sizes to suit the building layout
 - Low LED flicker <5%
 - Available in 3,000K or 4,000K
 - Long lifetime: 72,000 hours

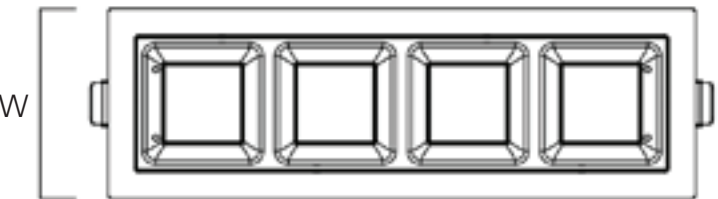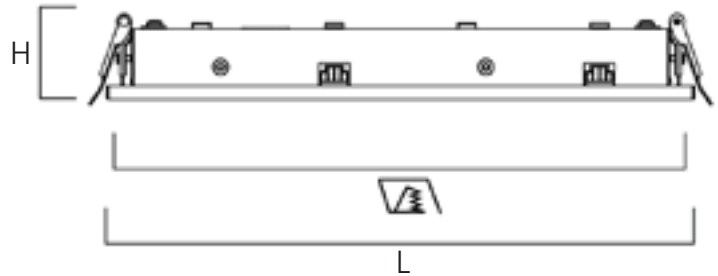

Size (W x L x H)	Cutout	Wattage	Lumen	UGR
310mm x 100mm x 45 mm	305 x 82	9W	1,098lm	<22
310mm x 100mm x 45 mm	305 x 82	9W	1,010lm	<18



For ordering guide please visit page 75.

sylvania-lighting.com

Concord Curvelyte



Features

- Curved architectural shape, perfect for offices, schools and conference rooms
- High efficiency, up to 131 lm/W
- Direct - Indirect (70/30) lighting for ambient illumination
- Uniform light for aesthetic effects
- Powered through suspension cable for easy installation and better visual impact
- Surface mount accessories are available in different colours and shapes to enhance ceiling appearance
- Low LED flicker <5%
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours



Curvelyte box
(2 rectangle)



Curvelyte box
(1 cyclinder 1 rectangle)



Size (W x L x H)	Wattage	UGR	Lumen
336mm x 1265mm x 45mm	55W	<22	6,250lm
336mm x 1265mm x 45mm	55W	<22	6,750lm
336mm x 1265mm x 45mm	55W	<19	5,000lm
336mm x 1265mm x 45mm	55W	<19	5,450lm
336mm x 1265mm x 45mm	55W	<23	6,600lm
336mm x 1265mm x 45mm	55W	<23	7,200lm
336mm x 1265mm x 45mm	55W	<19	5,300lm
336mm x 1265mm x 45mm	55W	<19	5,800lm

Concord Colossal



Features


- Circular architectural surface mounted or suspended ambient luminaire, designed for circulation areas
- High efficiency up to 118lm/W
- Direct light distribution
- Pendant version mounted using suspension cable accessory
- Aluminium housing with polycarbonate opal diffuser for a comfortable visual uniformity
- Higher output, up to 15,000lm available soon
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours



Size (Ø x H)	Wattage	Lumen
ø400mm x 73mm	30W	3,550lm
ø600mm x 73mm	32W	4,000lm
ø900mm x 73mm	62W	8,000lm
ø1200mm x 73mm	116W	15,000lm

*Suspension cable up to 4000mm


Concord Myriad Pendant

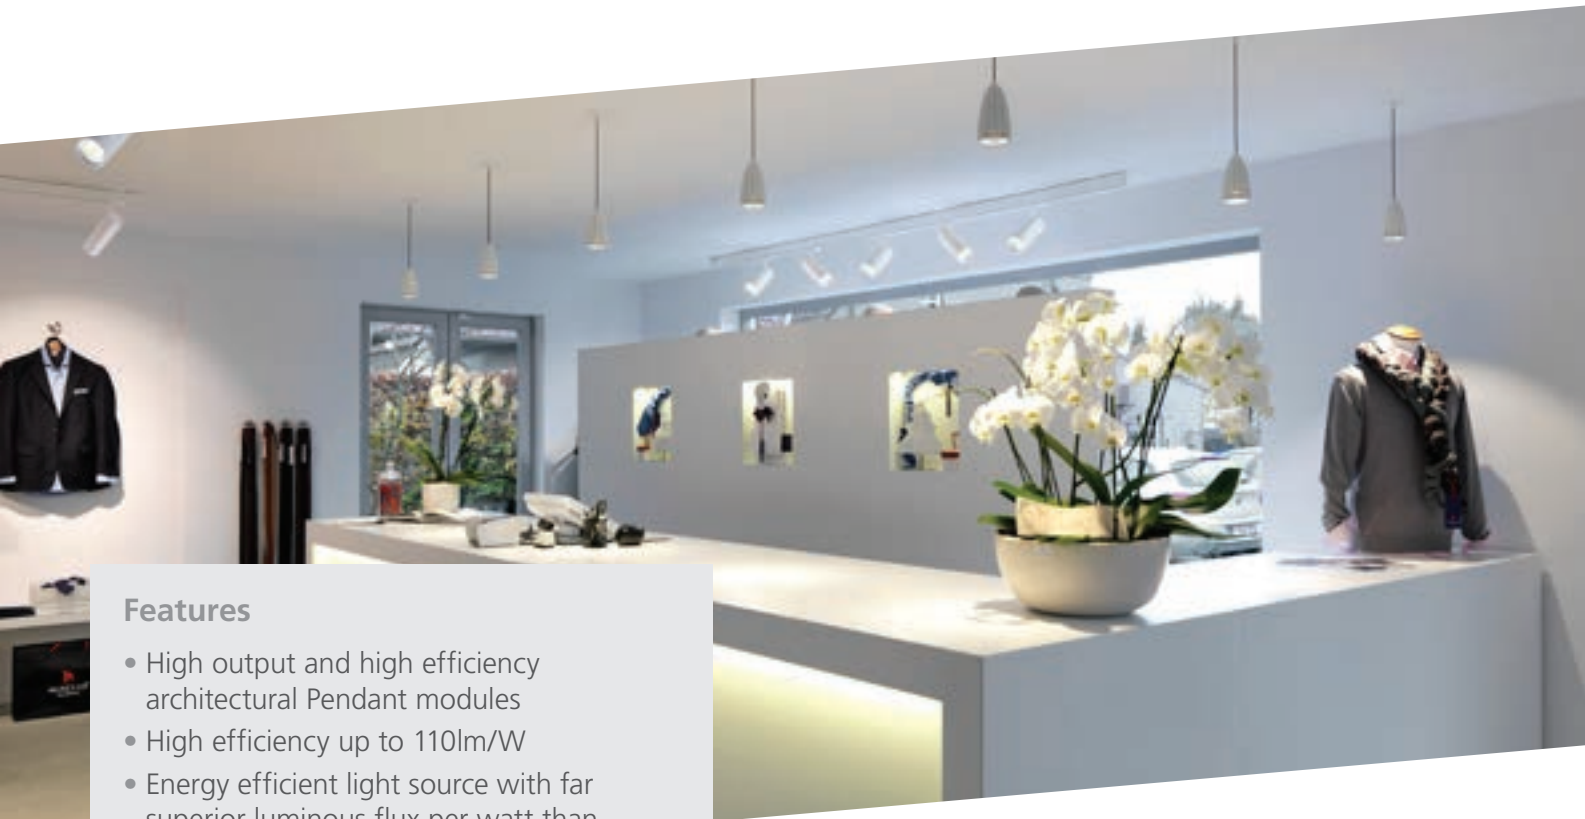


Features

- High output and high efficiency architectural Pendant modules
- High efficiency up to 110lm/W
- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen lamps
- Available in White Ral 9016, Silver Ral 9006 & Black Ral 9005
- Luminaires supplied complete with LED drivers
- Total circuit power 10W
- Surface mounted with ceiling rose or remote driver
- Available in 2,700K, 3,000K or 4,000K
- Long lifetime: 50,000 hours

Surface mounted

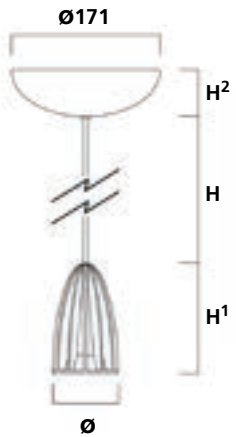


Remote gear



H = 1500mm cable length
H¹ = 129mm
H² = 58mm
*3,000K version

Size (Ø x H¹)	Wattage	Lumen
Ø75mm x 129mm	10W	1,114lm*


Concord TubiXX

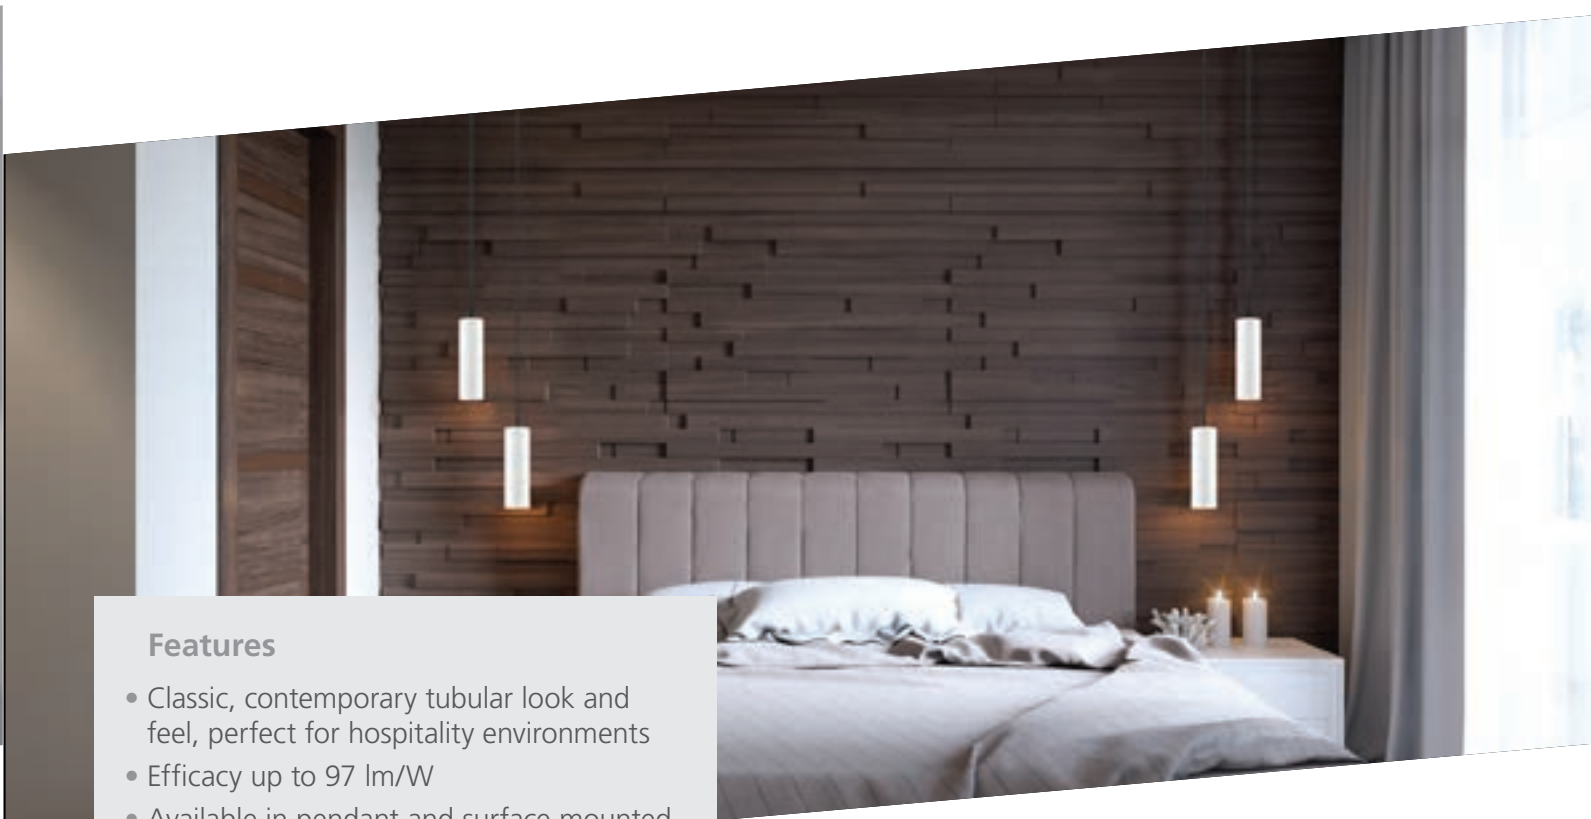

Features

- Classic, contemporary tubular look and feel, perfect for hospitality environments
- Efficacy up to 97 lm/W
- Available in pendant and surface mounted versions
- Different colour finishes and reflectors
 - Black body with Gold reflector
 - White body with White reflector
 - White Body with Black reflector
- Available in 2,700K, 3,000K or 4,000K
- Long lifetime: 50,000 hours

Pendant

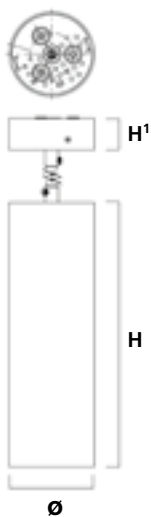

H¹ = 1500mm cable length
*4,000K black/ gold version

Size (Ø x H)	Wattage	Lumen*
Ø80mm x 250mm	14W	1,361lm

Surface



For ordering guide please visit page 77.


sylvania-lighting.com

Concord Ascent 50



Features

- Super slim highly efficient LED downlight with only 50mm recessing depth
- A true economic and efficient replacement for existing CF-L downlights
- Provides optimum efficiency with up to 90 lumens per circuit watt
- Housing colour: White- RAL9016
- Construction material: Aluminium
- Available in 3000K or 4000K
- Long lifetime: 50,000 hours

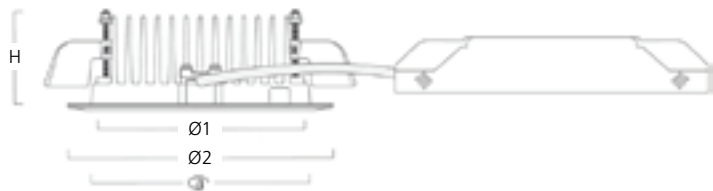

Size (Ø1 x Ø2 x H)	Cutout	Wattage	Lumen
120mm x 150mm x50mm	130mm	14W	1,732lm




Concord Ascent 100



Features


- Direct LED retro fit for original LED 100 Deco (120) single CFL lamp offering
- Matching lumen levels and improved light distribution of original LED 100 CFL lamp equivalents
- Decorative reflector accepts snap fit polycarbonate accessories from existing LED 100 Deco 120 offering
- Available in 3000K or 4000K
- Long lifetime: 50,000 hours




Size (Ø1 x Ø2 x H)	Cutout	Wattage	Lumen
120mm x 150mm x94mm	137mm	6W	607lm
160mm x 189mm x94mm	178mm	8W	862lm



Concord Ascent 150 II

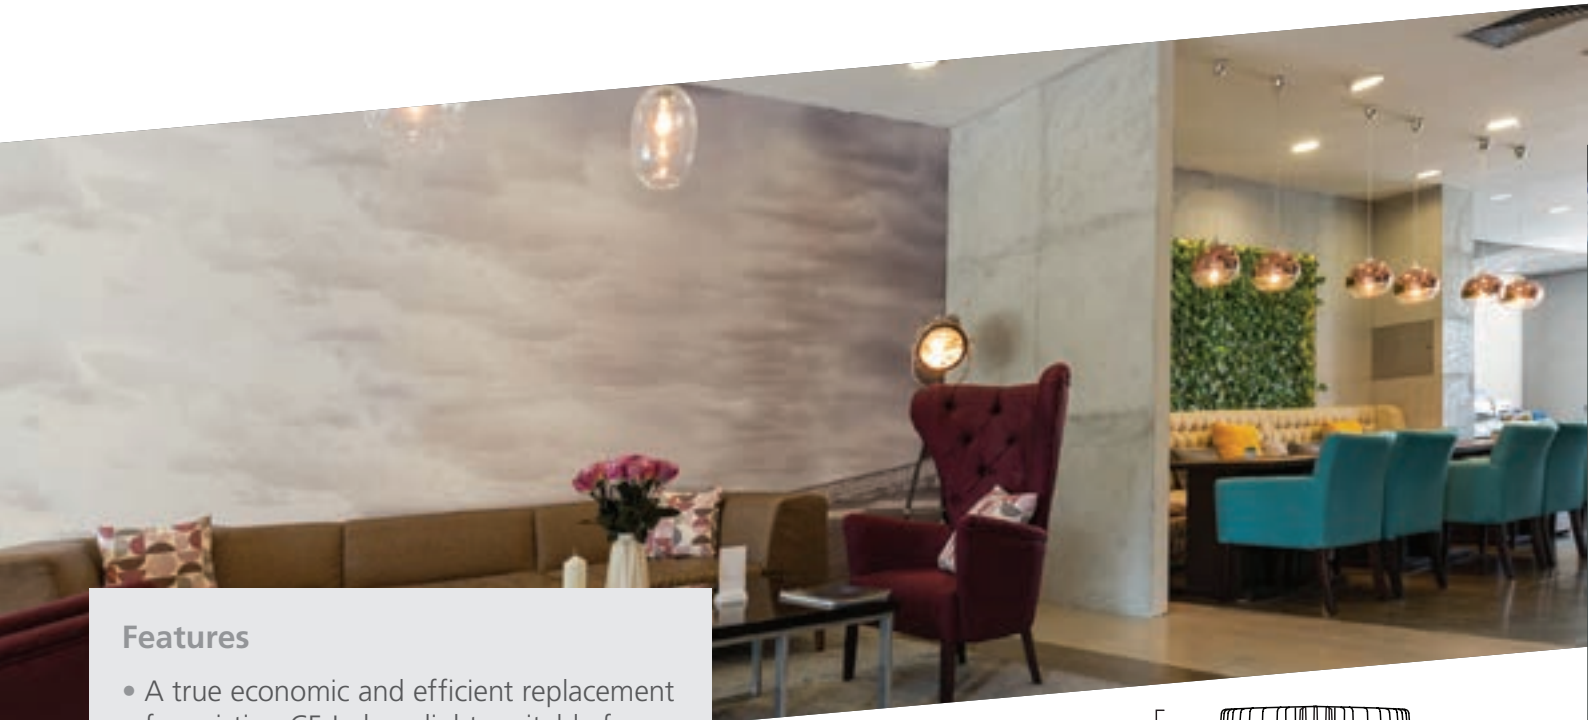


- Features**
- A true economic and efficient replacement for existing CF-L downlights suitable for a wide range of applications
 - High efficient round downlight up to 127lm/W
 - Wide selection of decorative accessories
 - Available in 3000K or 4000K
 - Long lifetime: 50,000 hours




Round

Size (Ø1 x Ø2 x H)	Cutout	Wattage	Lumen
160mm x 189mm x142mm	176mm	10-28W	1123-3435lm



Square


Size (W1 x W2 x H)	Cutout	Wattage	Lumen
154mm x 189mm x 158mm	176mm	10-28W	1246-3512lm

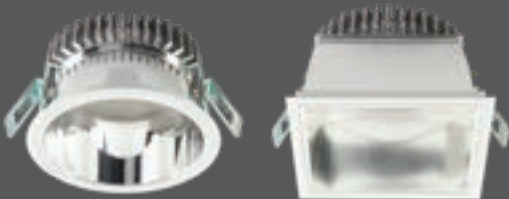

Concord Ascent 150 II Wallwash



- Features**
- A unique square and round wallwasher downlights
 - Provides excellent vertical illuminance
 - High efficient round downlight up to 127lm/W
 - Wide selection of decorative accessories
 - Available in 3000K or 4000K
 - Long lifetime: 50,000 hours



Size (Ø1 x Ø2 x H)	Cutout	Wattage	Lumen
215mm x 248mm x 180mm	137mm	6W	607lm




Concord Domino



Features

- Innovative compact modular system with recessed frame for maximum flexibility and high brilliance light
- Application areas: residential, hotels, restaurants, retail, corridors
- Rectangular shape in cast aluminium frames with tool free spring clip and bracket installation
- Chrome, Gold and Black reflectors are UGR16, White reflector is UGR19
- Available in 1, 2, 5 or 10 module units
- Choice of black, chrome, white or gold reflector finishes
- Trim or trimless recessed frame design
- Available in 3,000K or 4,000K
- Long lifespan: 96.000h L90B10

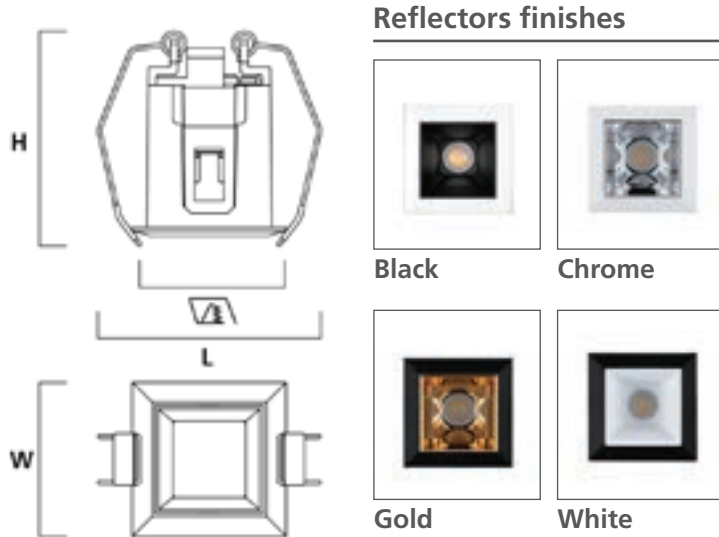

Size (W x L x H)	Cut Out	Wattage	Lumen
50mm x 72mm x 70mm	43 x 43mm	4W	200lm
50mm x 91mm x 70mm	63 x 43mm	6W	370lm
54mm x 172mm x 70mm	143 x 43mm	13W	940lm
52mm x 302mm x 70mm	276 x 43mm	23W	1760lm



For ordering guide please visit page 83.


sylvania-lighting.com

Concord Pixier Wall



Features

- High-performance architectural range that focuses on aesthetics, and creates a real ambience. Contemporary design with rounded edges. SylSmart for Scene Setting and SylSmart for Connected Building solution.
- Single pod surface version of Award Winning Pixier range
- Available in 3000K or 4000K
- Long lifetime: 50,000 hours

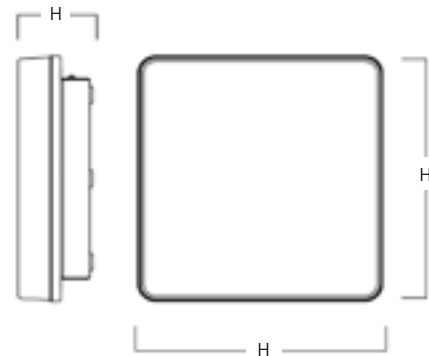


Size (L x W x H)	Wattage	Lumen
257mm x 257mm x 79mm	16W	1,850lm



For ordering guide please visit page 86.


sylvania-lighting.com

Concord Tide

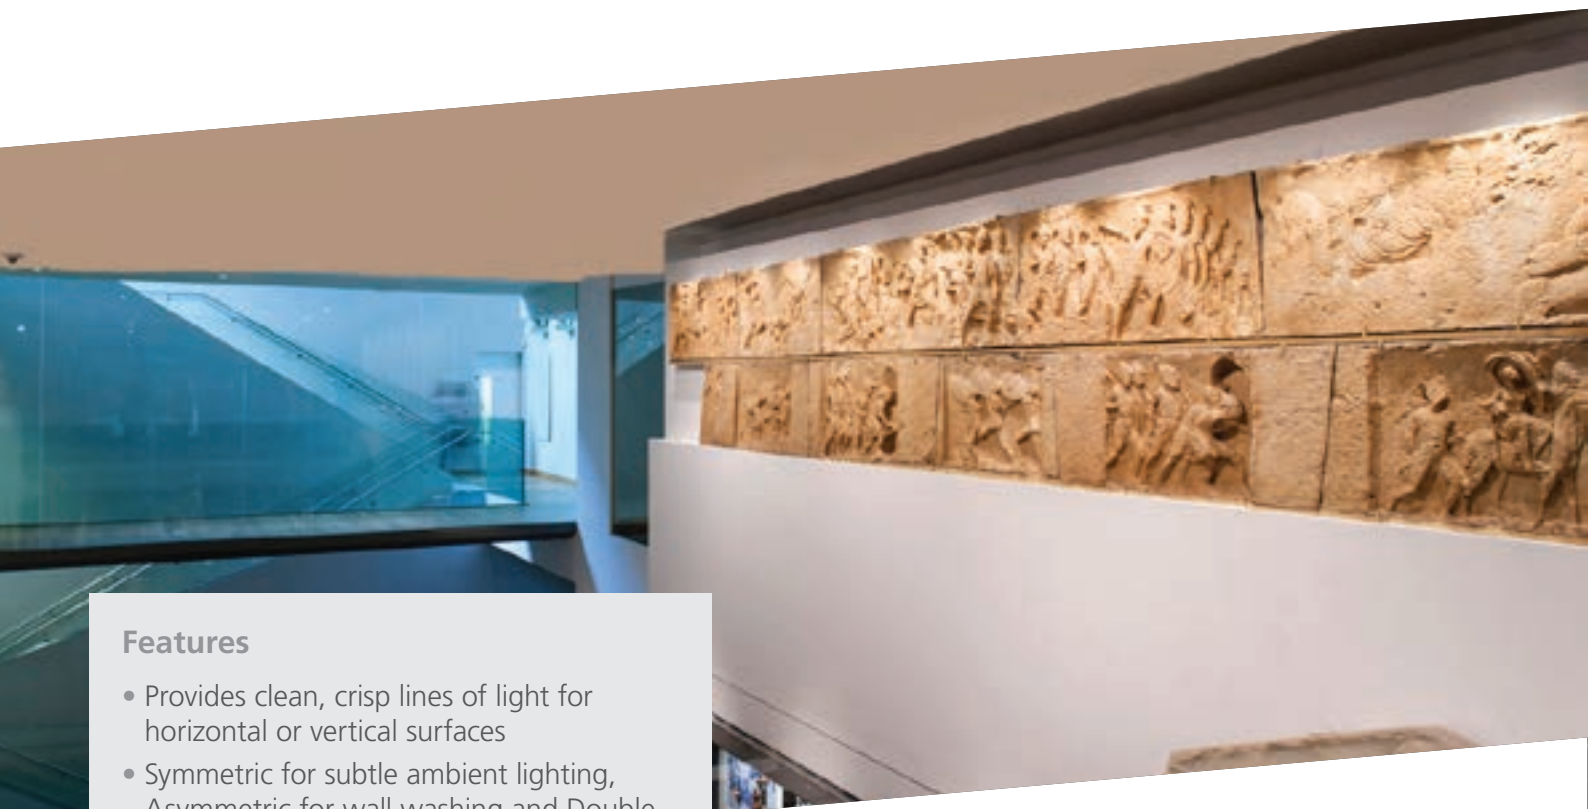


Features

- Provides clean, crisp lines of light for horizontal or vertical surfaces
- Symmetric for subtle ambient lighting, Asymmetric for wall washing and Double Asymmetric for corridor applications
- Available as non dimmable or DALI dimmable versions
- For mounting on Lytespan 3 (3-circuit track)
- Available in 3000K or 4000K
- Long lifetime: 60,000 hours

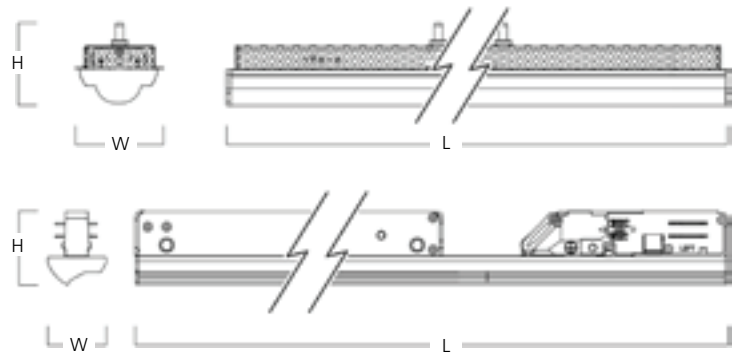


	Size (L x W x H)	Wattage	Lumen
Asymmetric track	604mm x 37mm x 46mm	40W	2,641lm
Symmetric track	604mm x 37mm x 46mm	40W	2,397lm
Asymetric recessed	604mm x 37mm x 39mm	40W	2,021lm
Symmetric recessed	604mm x 37mm x 39mm	40W	1,871lm

Concord Beacon LED

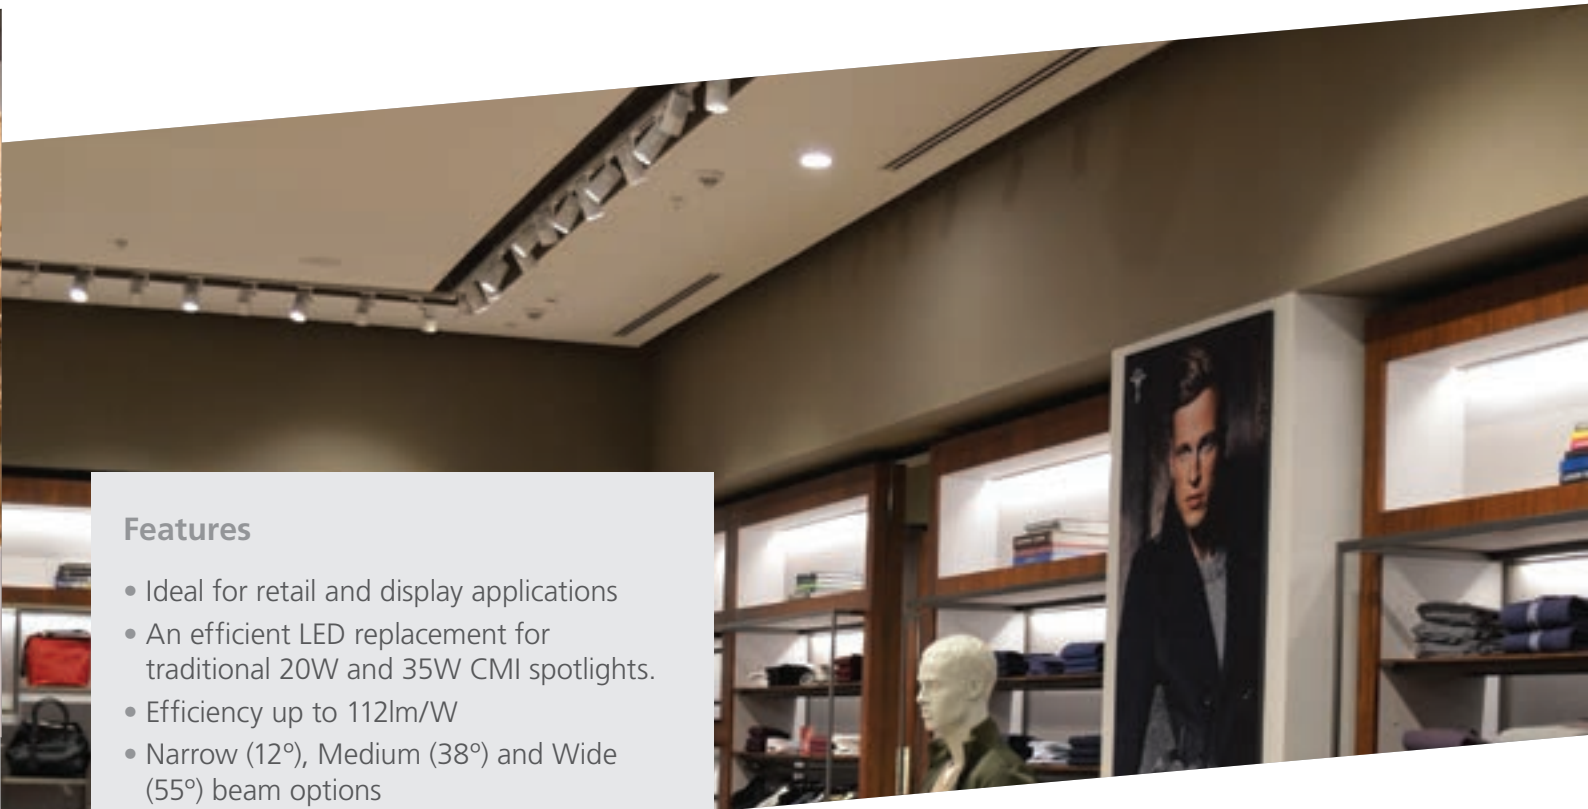

Features

- Ideal for retail and display applications
- An efficient LED replacement for traditional 20W and 35W CMI spotlights.
- Efficiency up to 112lm/W
- Narrow (12°), Medium (38°) and Wide (55°) beam options
- For mounting on 1 circuit (Lytespan 1) or 3 circuit track (Lytespan 3)
- Die-cast aluminium body, passive cooling
- heatsink
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours

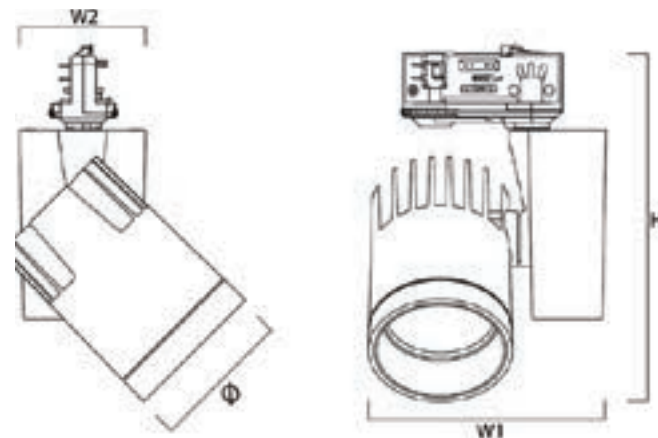


Size (ø x W x W2x H)	Wattage	Lumen	CRI
ø80mm x 130mm x 70mm x 190mm	21W	1,669-1,885lm	93
ø80mm x 130mm x 70mm x 190mm	21W	2,136-2,348lm	85

Concord Beacon LED XL



Features

- Perfect for retail, display, museum and larger gallery applications
- An efficient LED replacement for traditional 35W and 70W CMI spotlights
- Efficiency up to 119lm/W
- Narrow (15°) , Medium (34°) or Wide (50°) beam options
- For mounting on 3-circuit track (Lytespan3)
- Die-cast aluminium body, passive cooling heatsink
- Accessories available (Elongation lens, Honeycomb filter, Barn door and Snoot)
- IR/UV free light source without heat radiation
- Choice of black or white black housing finish
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours

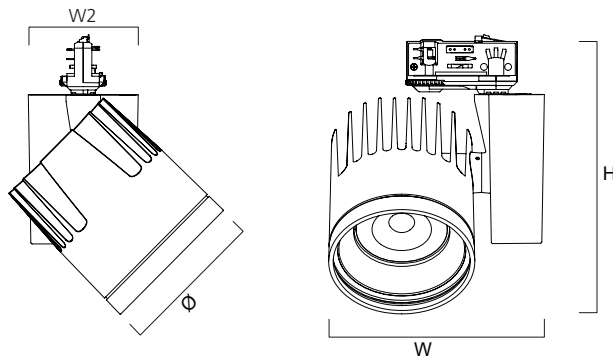


Size (ø x W x W2 x H)	Wattage	Lumen	CRI
ø113mm x 165mm x 85mm x 205mm	33W	3,033-3,314lm	93
ø113mm x 165mm x 85mm x 205mm	33W	3,682-3,912lm	85



For ordering guide please visit page 88.


sylvania-lighting.com

Concord Beacon LED XXL

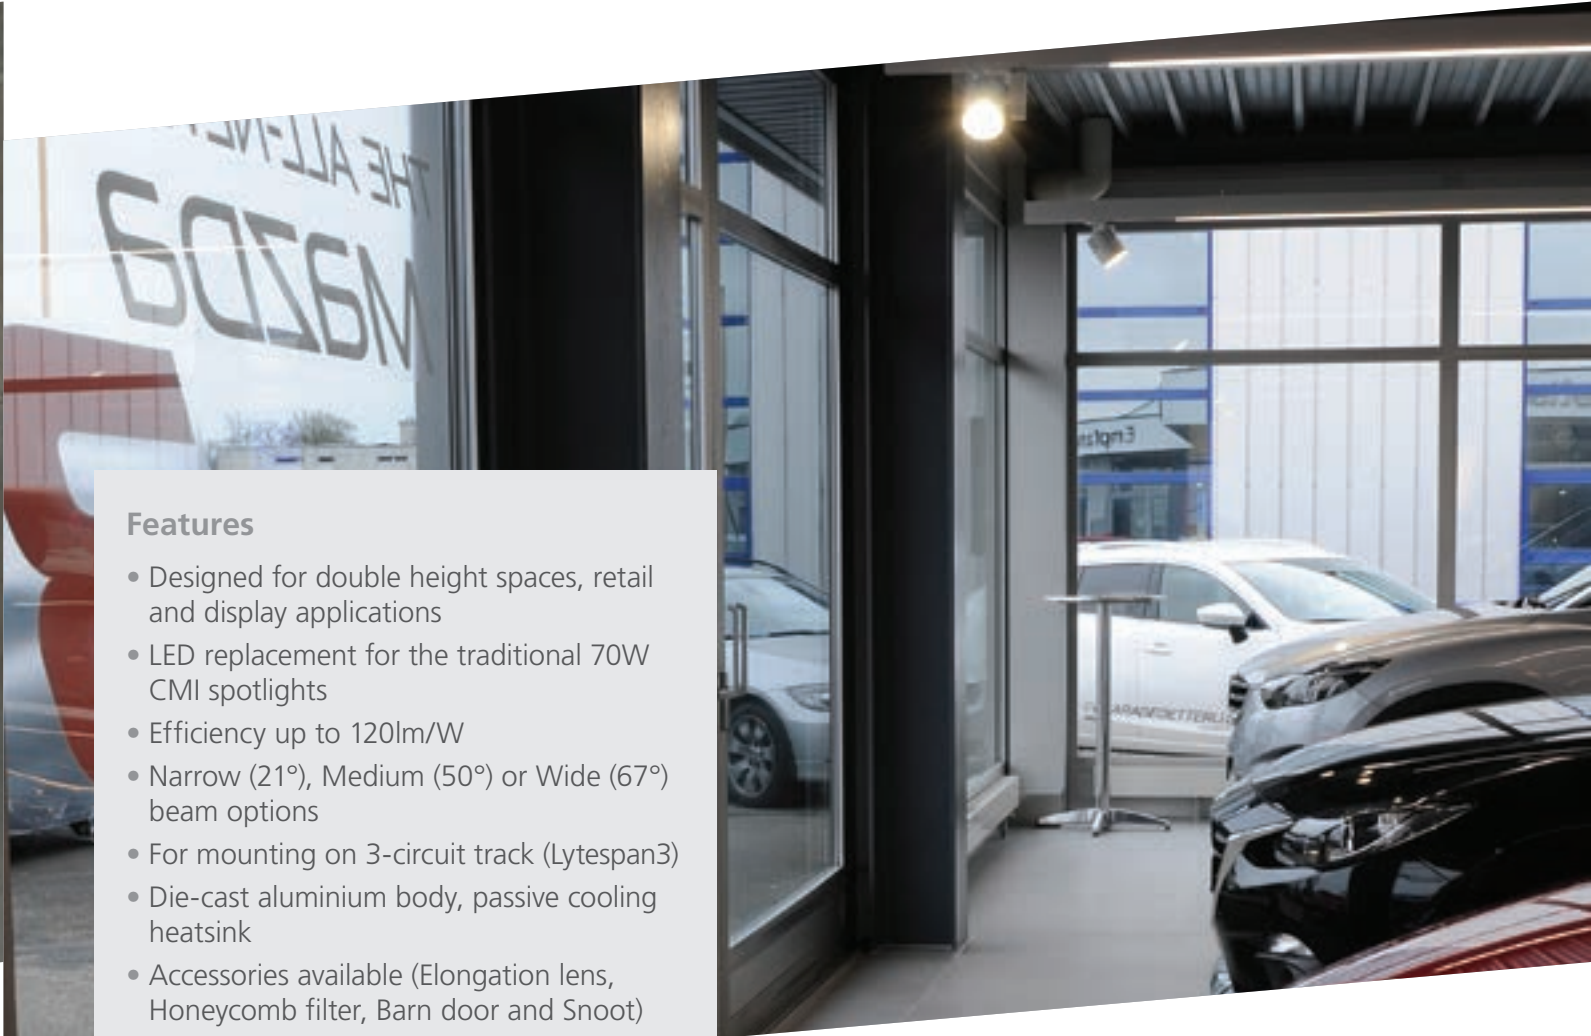

Features

- Designed for double height spaces, retail and display applications
- LED replacement for the traditional 70W CMI spotlights
- Efficiency up to 120lm/W
- Narrow (21°), Medium (50°) or Wide (67°) beam options
- For mounting on 3-circuit track (Lytespan3)
- Die-cast aluminium body, passive cooling heatsink
- Accessories available (Elongation lens, Honeycomb filter, Barn door and Snoot)
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Available in 3,000K and 4,000K
- Long lifetime: 50,000 hours

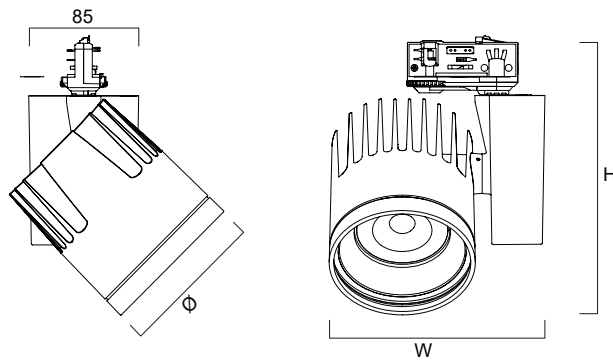

Size (ø x L x H)	Wattage	Lumen	CRI
ø 113mm x 168mm x 205mm	48W	4,179-4,884lm	93
ø 113mm x 168mm x 205mm	48W	4,884-5,762lm	85



For ordering guide please visit page 88.


sylvania-lighting.com

Concord Beacon LED Accent



Features

- Ideal for museum and gallery applications requiring high colour rendering properties
- Narrow (10°), Medium (37°) and Wide (52°) beam options
- For mounting on 1-circuit track (Lytespan1) or 3-circuit track (Lytespan3)
- Dark-light detail for increased accentuation and visual comfort
- Accessories available (Elongation lens, Softner lens, Honeycomb filter, Barn door and Snoot)
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Available in 3,000K or 4,000K
- Long lifetime: 72,000 hours

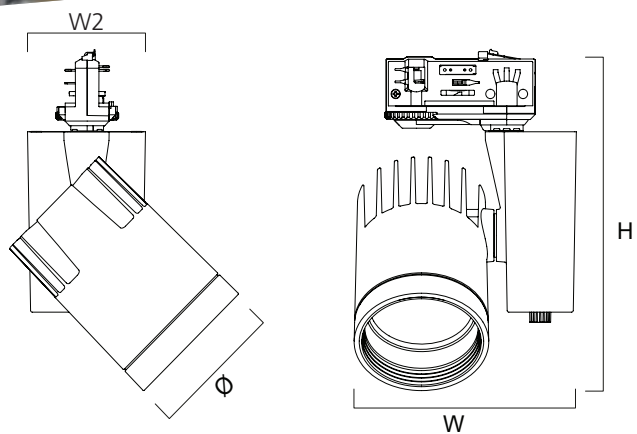

Size (ø x W x W2 x H)	Wattage	Lumen	CRI
ø80mm x 130mm x 70mm x 190mm	21W	576-1,578lm	97




Concord Beacon LED Accent XL



Features


- Ideal for larger museum and gallery applications requiring high colour rendering properties
- Intense Narrow (14°), Medium (33°) and Wide (44°) beam options
- For mounting on 3-circuit track (Lytespan3)
- Dark-light detail for increased accentuation and visual comfort
- Choice of black or white housing finish
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

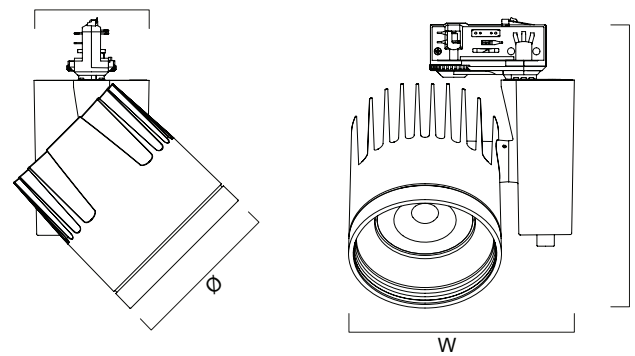


Size (W x L x H)	Wattage	Lumen	CRI
ø113mm x 165mm x 205mm	33W	1,827-2,668lm	97



Concord Beacon Muse II

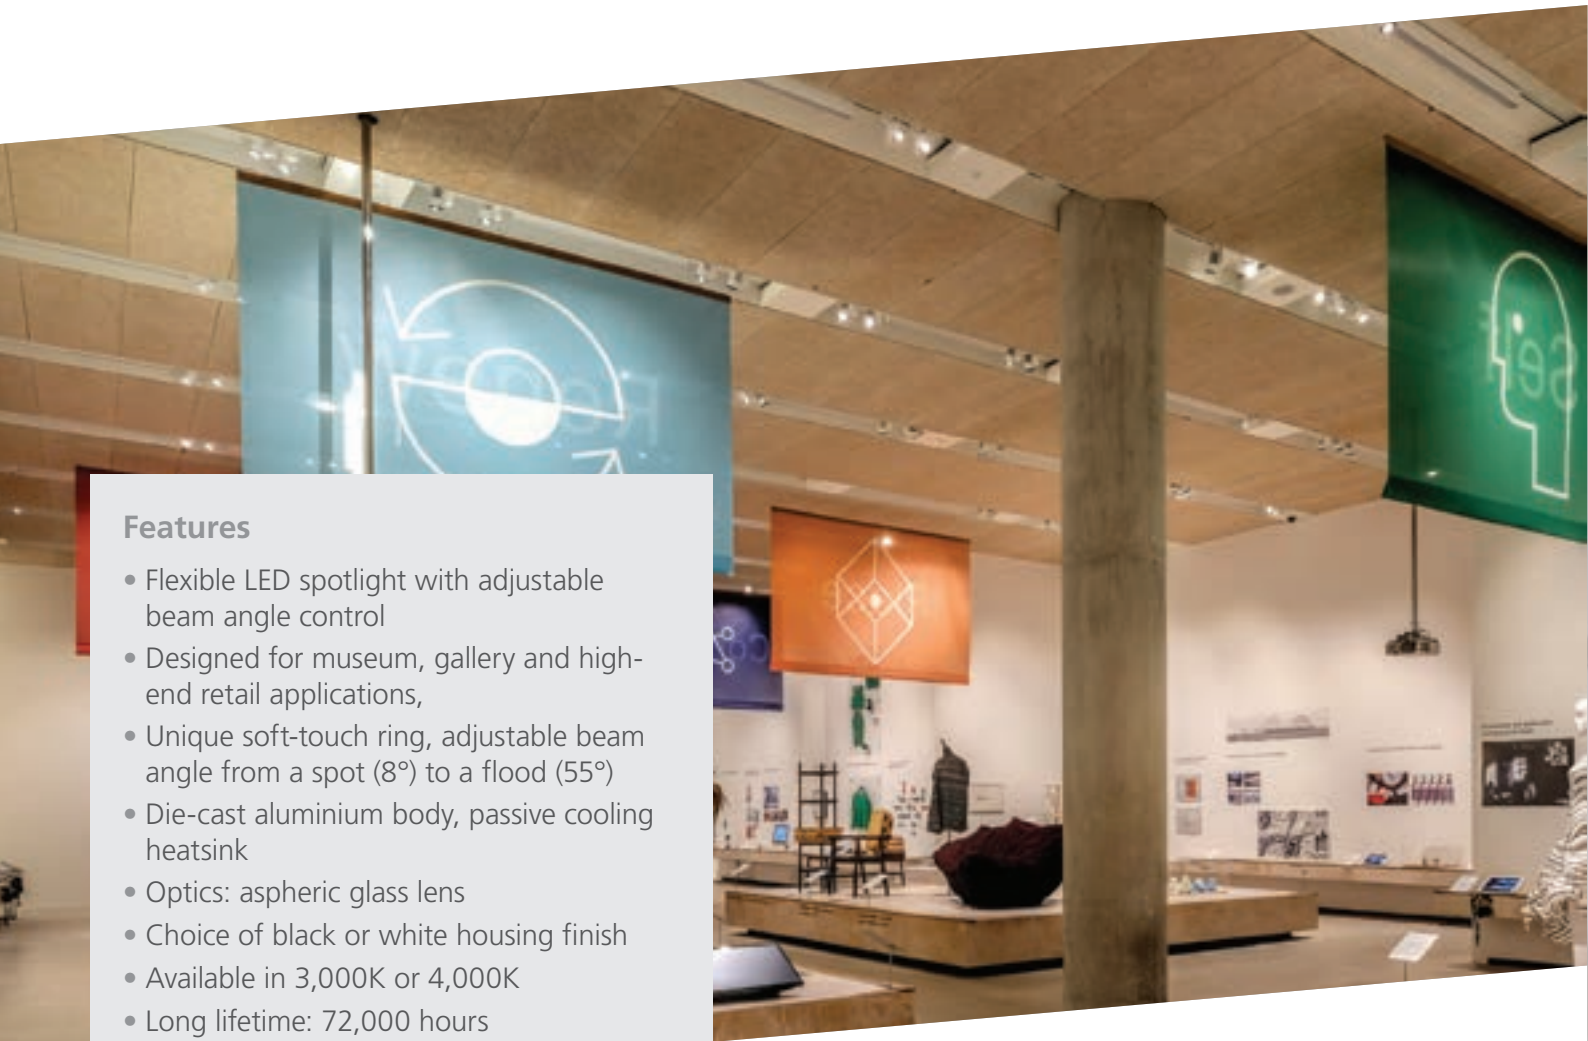

- Features**
- Flexible LED spotlight with adjustable beam angle control
 - Designed for museum, gallery and high-end retail applications,
 - Unique soft-touch ring, adjustable beam angle from a spot (8°) to a flood (55°)
 - Die-cast aluminium body, passive cooling heatsink
 - Optics: aspheric glass lens
 - Choice of black or white housing finish
 - Available in 3,000K or 4,000K
 - Long lifetime: 72,000 hours

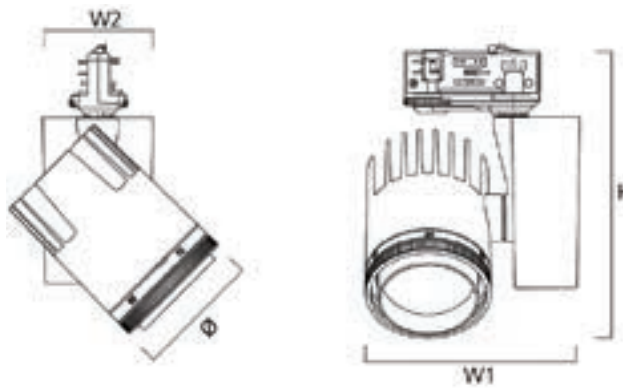


Size (ø x W1 x W2 x H)	Wattage	Lumen	CRI
ø80mm x 135mm x 70mm x 176mm	21W	623-1,150lm	97



Concord Beacon Muse XL




- Features**
- High output, flexible LED spotlight with adjustable beam angle control
 - Designed for larger museum, gallery and high-end retail applications,
 - Unique soft-touch ring, adjustable beam angle from spot (10°) to flood (70°)
 - Die-cast aluminium body, passive cooling heatsink
 - Optics: aspheric glass lens
 - Choice of black or white housing finish
 - Available in 3,000K or 4,000K
 - Long lifetime: 50,000 hours

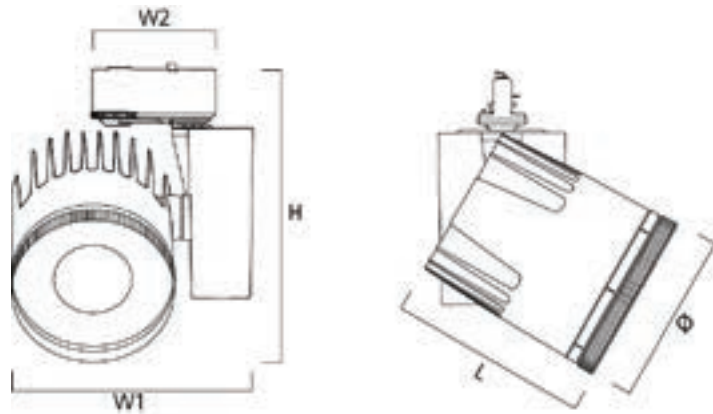

Size (ø x W1 x W2 x L x H)	Wattage	Lumen	CRI
115mm x 165mm x 85mm x 132mm x 200mm	41W	2,884lm	97




Concord Beacon Muse Xicato

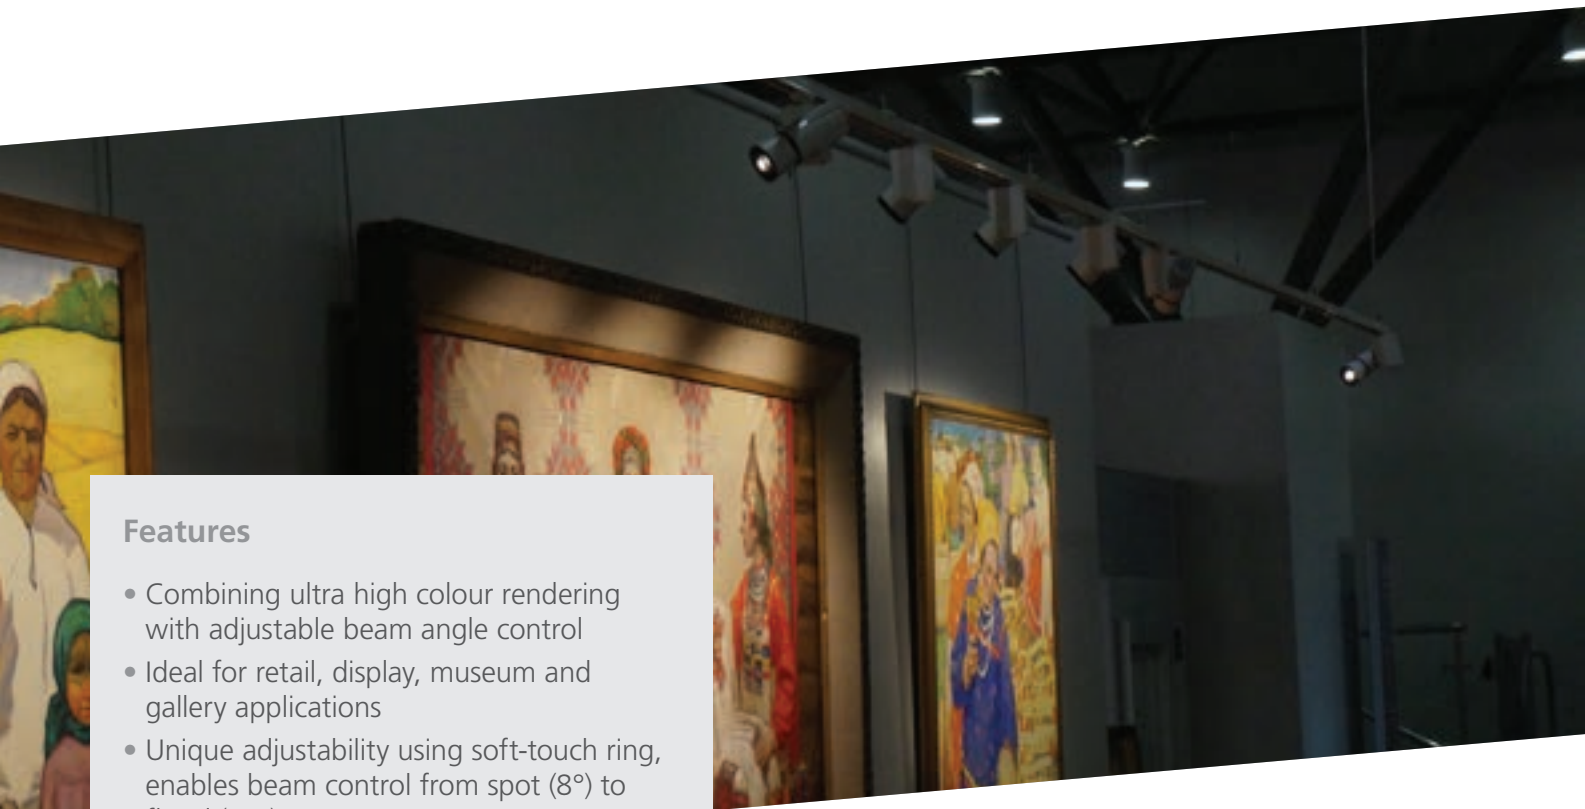


Features

- Combining ultra high colour rendering with adjustable beam angle control
- Ideal for retail, display, museum and gallery applications
- Unique adjustability using soft-touch ring, enables beam control from spot (8°) to flood (52°)
- Die-cast aluminium body with passive cooling heatsink
- For mounting 3-circuit track (Lytespan3)
- Accessories available: Elongation lens, Honeycomb filter and Snoot
- Monopoint accessory available for surface mounting
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Available in 3000K, 3500K and 4000K
- Long lifetime: 50,000 hours

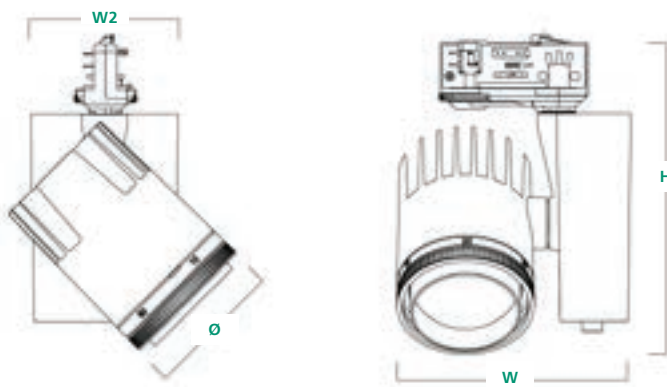


Size (ø x W x W2x H)	Wattage	Lumen	CRI
ø80mm x 135mm x 85mm x 178mm	20W	395 - 698lm	98

Concord Beacon Muse Xicato XL

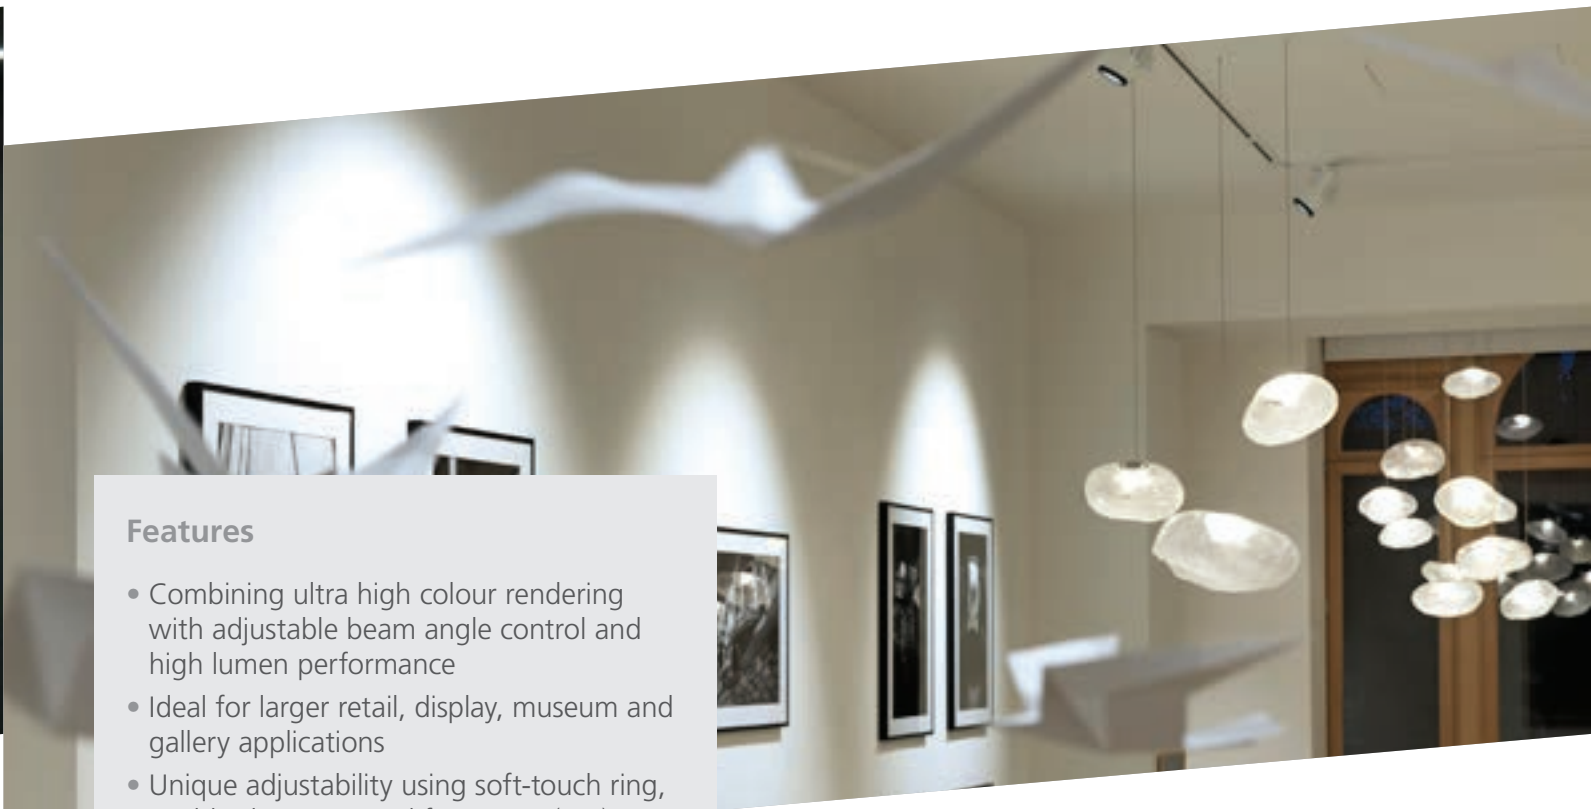

Features

- Combining ultra high colour rendering with adjustable beam angle control and high lumen performance
- Ideal for larger retail, display, museum and gallery applications
- Unique adjustability using soft-touch ring, enables beam control from spot (10°) to flood (72°)
- Die-cast aluminium body with passive cooling heatsink
- For mounting 3-circuit track (Lytespan3)
- Accessories available: Elongation lens, Honeycomb filter and Snoot
- Monopoint accessory available for surface mounting
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Available in 3000K, 3500K and 4000K
- Long lifetime: 50,000 hours

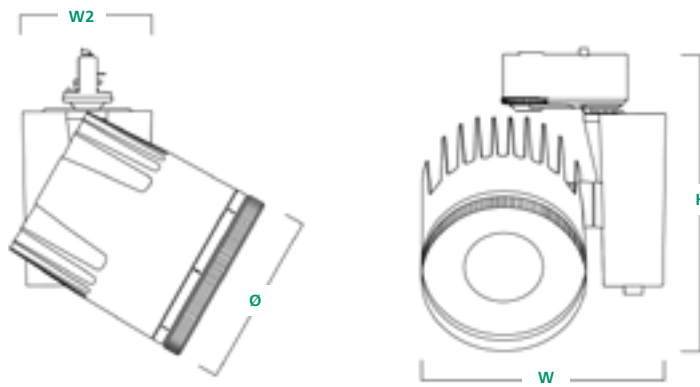


Size (ø x W x W2x H)	Wattage	Lumen	CRI
ø115mm x 165mm x 85mm x 200mm	35W	681 - 1,697lm	98

Concord Beacon Tune II



Features


- Flexible LED spotlight with adjustable colour temperature from warm white to cool white
- Ideal for retail, display, museum and gallery applications
- Spot (27°) or flood (45°) beam options
- Die-cast aluminium body with passive cooling heatsink
- Optics: Fresnel lens for controlled beam
- For mounting on 1-circuit track (Lytespan1) or 3-circuit track (Lytespan3). DALI L3 only
- Accessories available: Elongation lens, Honeycomb filter and Snoot
- Monopoint accessory available for surface mounting
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Adjustable from 1,800K to 6,500K tunable white
- Lifetime: 35,000 hours

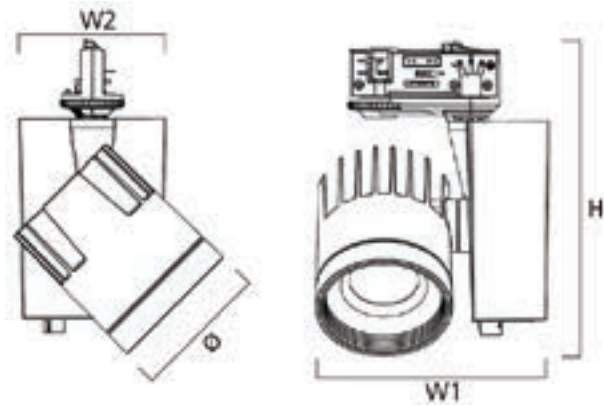

Size (Ø x W1 x W2 x H)	Wattage	Lumen	CRI
ø79mm x 135mm x 85mm x 182mm	19W	840-1,008lm	90




Concord Beacon Tune XL II

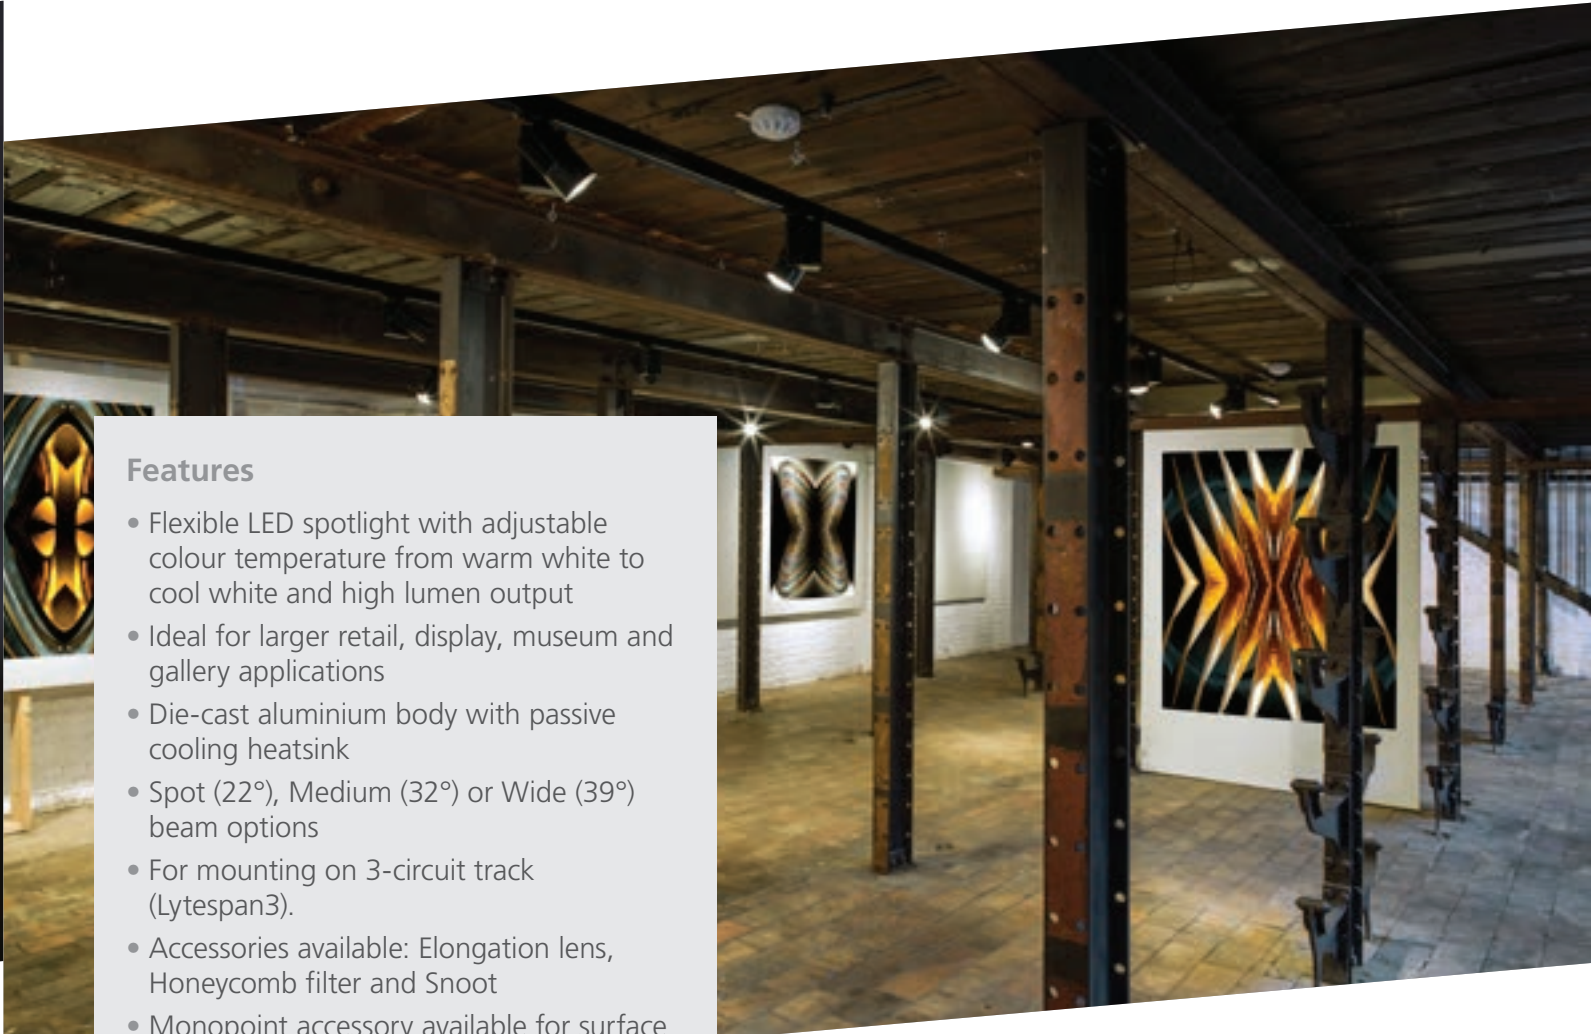

Features

- Flexible LED spotlight with adjustable colour temperature from warm white to cool white and high lumen output
- Ideal for larger retail, display, museum and gallery applications
- Die-cast aluminium body with passive cooling heatsink
- Spot (22°), Medium (32°) or Wide (39°) beam options
- For mounting on 3-circuit track (Lytespan3).
- Accessories available: Elongation lens, Honeycomb filter and Snoot
- Monopoint accessory available for surface mounting
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Adjustable from 1,800K to 6,500K tunable white
- Lifetime: 35,000 hours

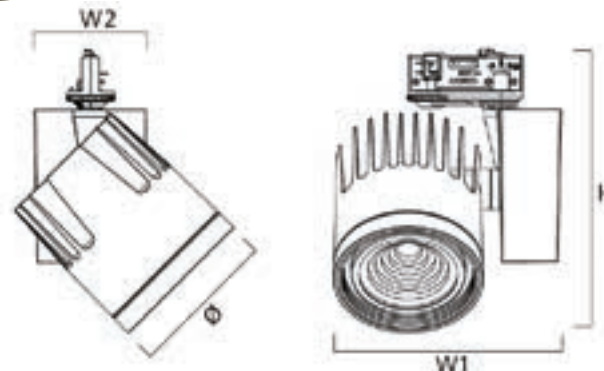


Size (Ø x W1 x W2 x H)	Wattage	Lumen	CRI
ø113mm x 170mm x 85mm x 215mm	33W	1,770-2,207lm	90



Concord Beacon Muse Tune II



- Features**
- Stylish combination of tuneable colour temperature and adjustable beam angle
 - Ideal for retail, display, museum and gallery applications
 - Unique adjustability using soft-touch ring, enables beam control from a tight spot (8°) to a flood (42°)
 - Die-cast aluminium body with passive cooling heatsink
 - For mounting on 1-circuit track (Lytespan1) or 3-circuit track (Lytespan3). DALI L3 only
 - Accessories (Elongation lens, Honeycomb filter and Snoot)
 - Monopoint accessory available for surface mounting
 - IR/UV free light source without heat radiation
 - Choice of black or white housing finish
 - Adjustable from 1,800K to 6,500K tunable white
 - Lifetime: 35,000 hours

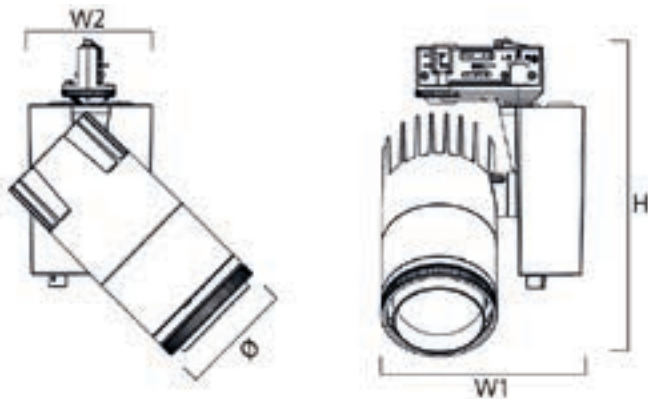


Size (Ø x W1 x W2 x H)	Wattage	Lumen	CRI
Ø79mm x 140mm x 85mm x 218mm	18W	100-165lm	90




For ordering guide please visit page 95.

sylvania-lighting.com

Concord Beacon Projector

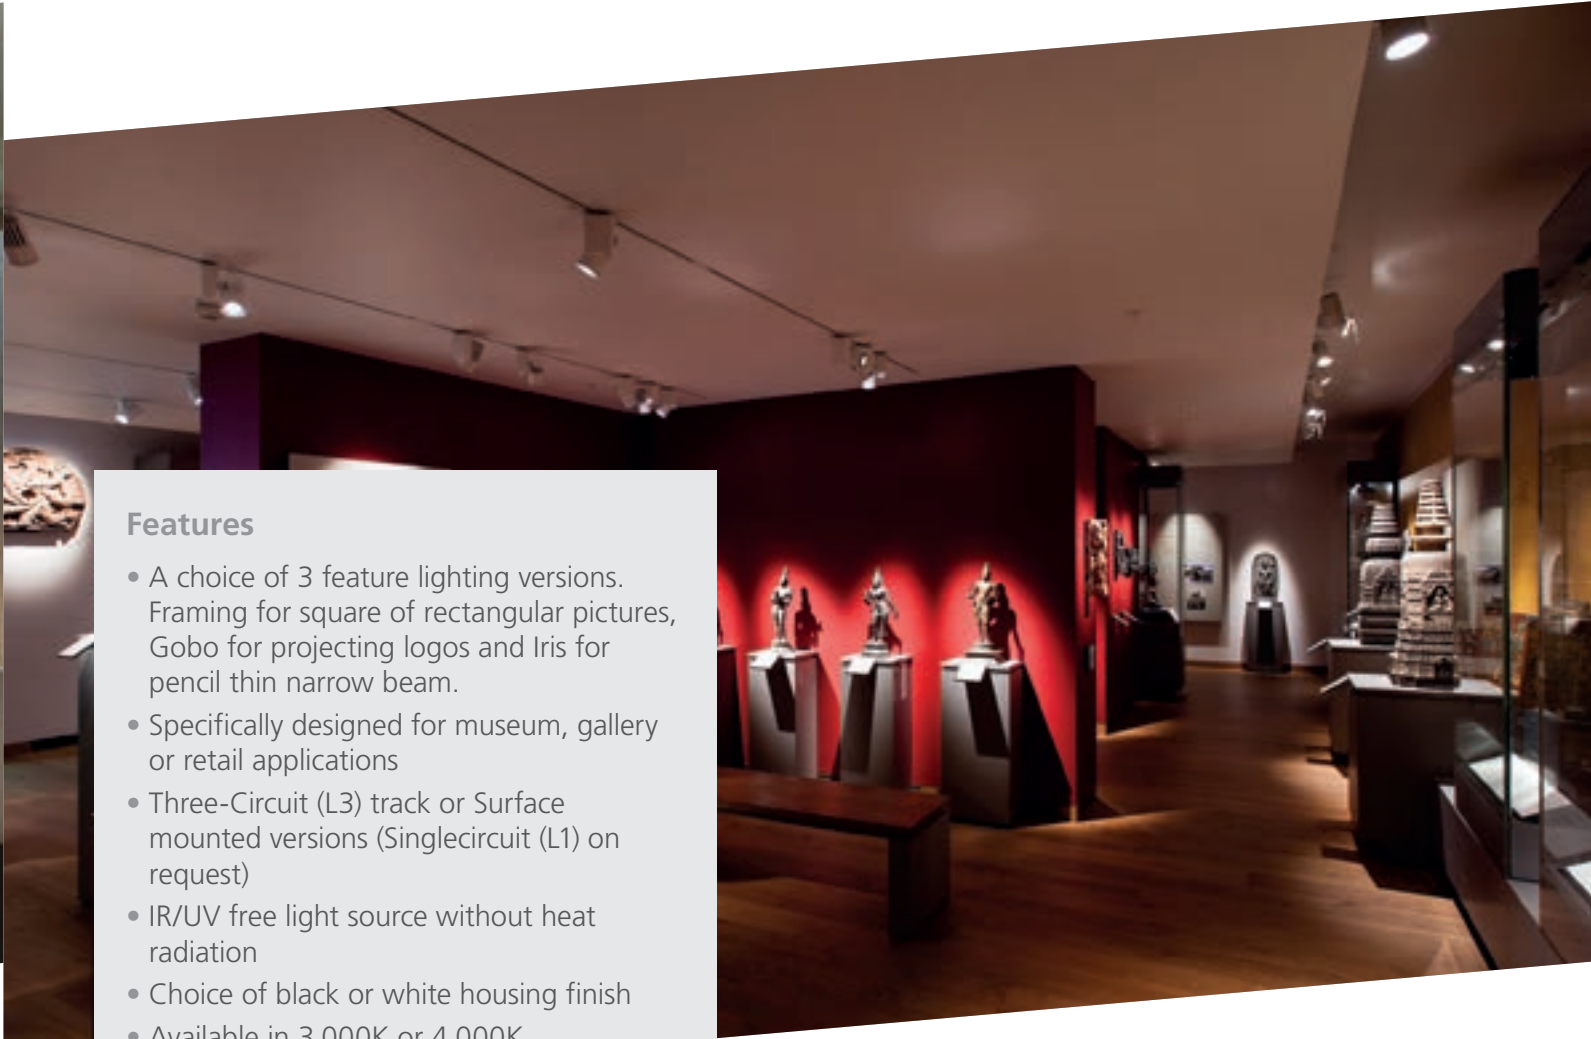

- Features**
- A choice of 3 feature lighting versions. Framing for square or rectangular pictures, Gobo for projecting logos and Iris for pencil thin narrow beam.
 - Specifically designed for museum, gallery or retail applications
 - Three-Circuit (L3) track or Surface mounted versions (Singlecircuit (L1) on request)
 - IR/UV free light source without heat radiation
 - Choice of black or white housing finish
 - Available in 3,000K or 4,000K
 - Long lifetime: 72,000 hours

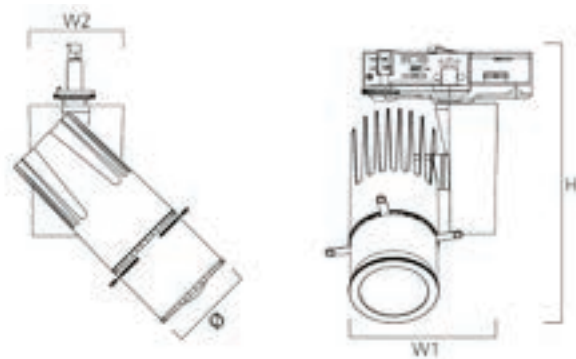

Size (Ø x W1 x W2 x H)	Wattage	Lumen	CRI
Ø 79mm x 128mm x 245mm	35W	474lm	97



For ordering guide please visit page 96.


sylvania-lighting.com

Concord Beacon Wallwash




Features

- Designed for vertical wall illumination in museums, galleries and retail
- Energy efficiency up to 102 lm/W
- Specially adapted asymmetric lens to provide a powerful LED wallwash solution
- Uniform ceiling to floor vertical illuminance up to 4m height and 4.5m horizontal spread
- For mounting on 3-circuit track (Lytespan3)
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

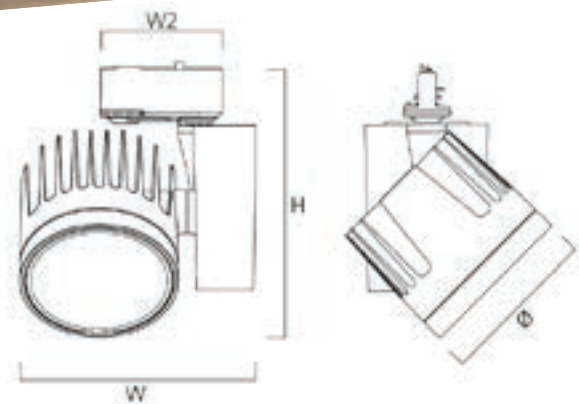


Size (ø x W1 x W2 x H)	Wattage	Lumen	CRI
ø110mm x 170mm x 85mm x 175mm	48W	4,089lm	93
ø110mm x 170mm x 175mm	48W	4,916lm	85

Concord Beacon Shelf

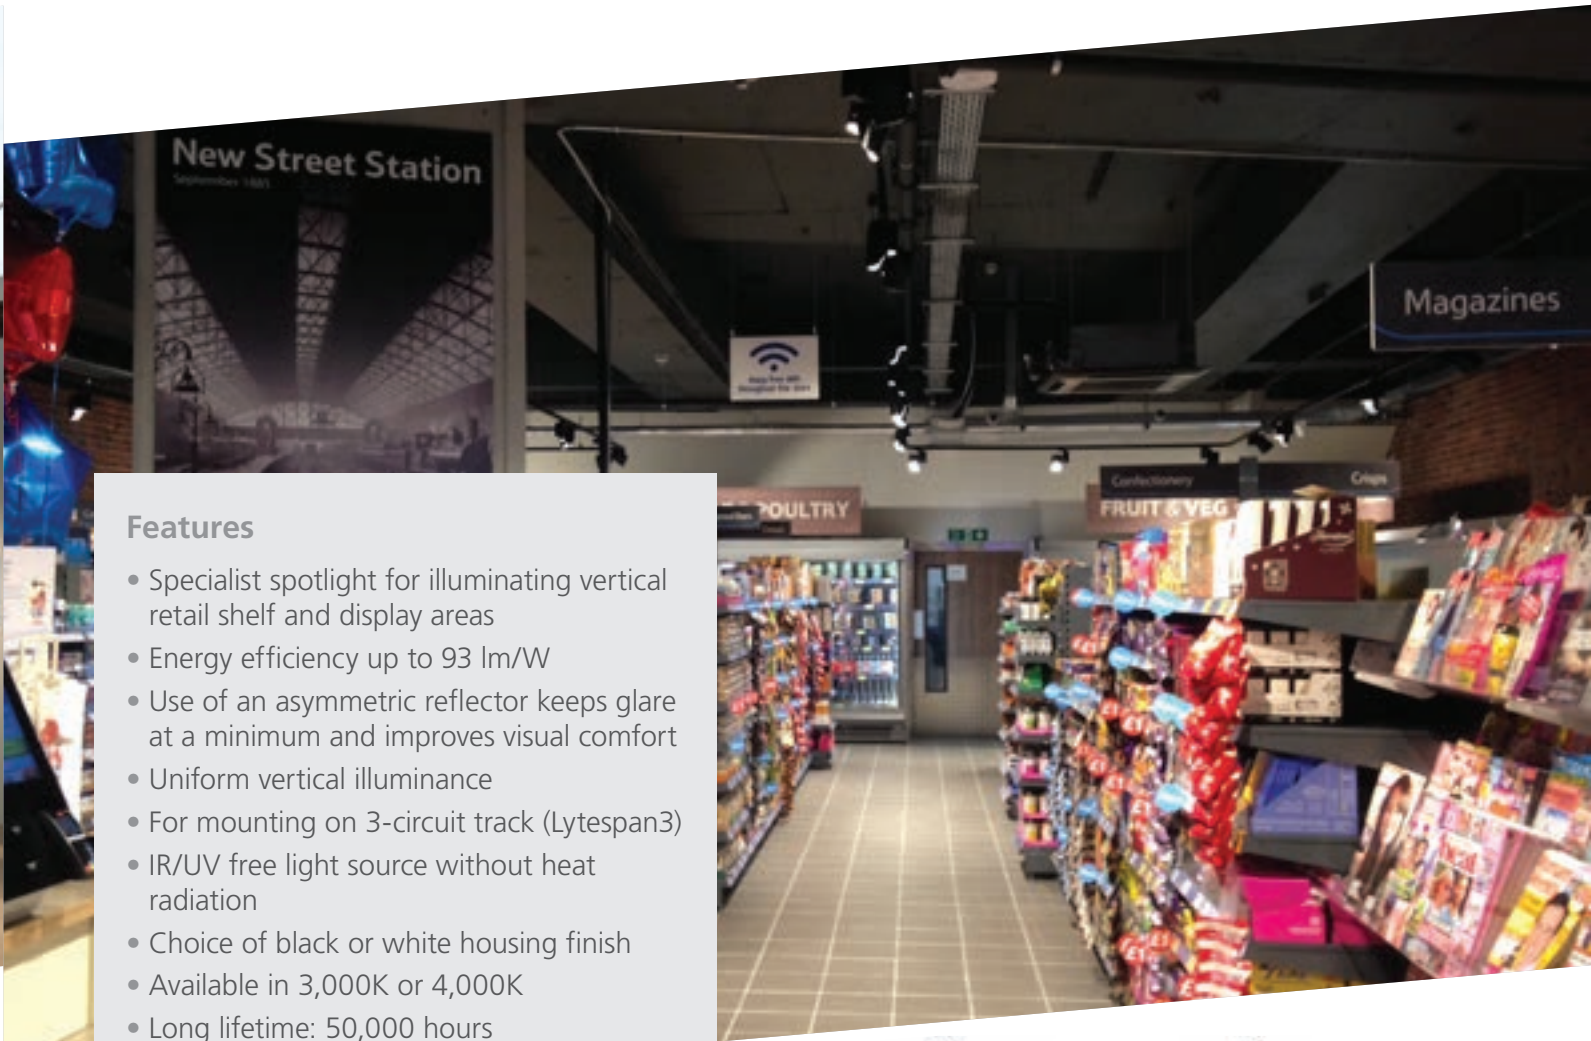

Features

- Specialist spotlight for illuminating vertical retail shelf and display areas
- Energy efficiency up to 93 lm/W
- Use of an asymmetric reflector keeps glare at a minimum and improves visual comfort
- Uniform vertical illuminance
- For mounting on 3-circuit track (Lytespan3)
- IR/UV free light source without heat radiation
- Choice of black or white housing finish
- Available in 3,000K or 4,000K
- Long lifetime: 50,000 hours

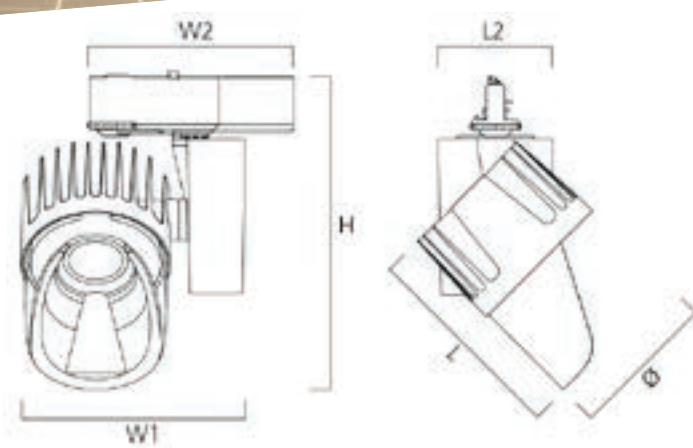

Size (ø x W1 x W2 x H x L)	Wattage	Lumen	CRI
ø110mm x 170mm x 135mm x 227mm x 155mm	48W	4,485lm	93



Concord Lytespan I

5 Year
WARRANTY



Features

- Polarised 16 amp single circuit track system with two conductors
- Suitable for use with Concord single circuit track adaptor types
- Choice of formats including low profile
- Universal feeds and couplers with polarisation determined during installation with polarisation tab
- Unique push-up feed allows power to be fed on or off anywhere along the length of the track
- Can be cut on site
- Broad range of universal suspensions
- Polarised and fully earthed to latest international standards

Starter Track Kit



- Single length or to start a run
- Ideal for surface mounted runs
- Single length or to start a run
- Supplied with Track Unit, Plug-in Live End, End Caps and Surface Mount Clips
- Construction material: Aluminium

Joiner Track Kit




- Extends Starter Track to create straight runs

*1000mm, 2000mm, 3000mm length **2000mm, 3000mm length


Standard Track Unit

- For single or continuous runs, bends and grids
- Ideal for surface mounting or suspension
- Order components and accessories separately




Recessed Track Unit


- Ideal for suspended ceilings
- Order components and accessories separately

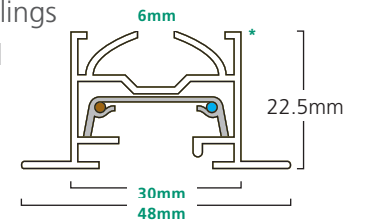


Components




Push-up Live Feed




Straight Plug-in Coupler




Flexible Coupler




Straight Plug-in Coupler




X Coupler




End Cap



T Coupler



L Coupler



Display Hook

Low Profile

Starter Track Kit




- Single length or to start a run
- White, Silver, and Black housing colours


Joiner Track Kit




- Extends Starter Track to create straight runs.

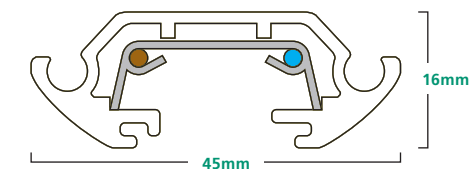

Components



Display Hook



Flexible Coupler

Concord Lytespan III



Features

- Polarised 16amp three circuit track system with a common neutral
- Suitable for use with Concord, three circuit adaptors
- Each of the three circuits can be independently dimmed
- Unique Lytespan3 'venturi' trunk profile in standard or recessed form
- Lytebeam deep trunk profile with empty back channel for cable way, T5 or Lytespan3 module
- Couplers and feeds are pre-wired and polarised for ease of installation.
- Broad range of universal suspensions
- Polarised and fully earthed to latest international standards

Standard Track Unit



- For single or continuous runs and grids
- Ideal for surface mounting or suspension
- Order components and accessories separately


Recessed Track Unit




- For single or continuous runs
- Ideal for suspended ceilings
- Order components and accessories separately
- Construction material: Aluminium

*1000mm, 2000mm, 3000mm, 4000mm length

Starter Track Kit

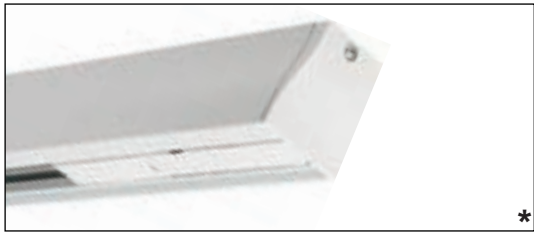


- Ideal for surface mounted runs
- Single length or to start a run
- Supplied with Track Unit, Push-up Live feed, end caps and Surface Mount Clips




Standard Track Unit

Joiner Track Kit

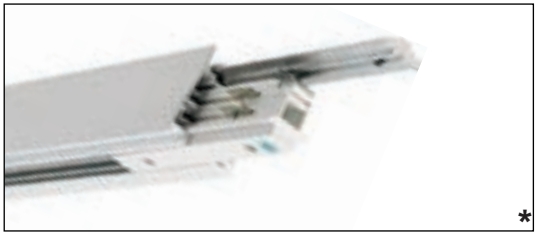


- Ideal for surface mounted runs
- Extends Starter Track to create straight runs
- Supplied with Track Unit, Straight Coupler and Surface Mount Clips
- Construction material: Aluminium

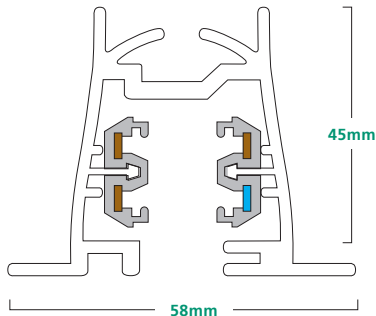


Recessed Track Unit


Components




Push-up Live Feed




Straight Plug-in Coupler




Plug-in Live Feed




L Coupler



T Coupler



X Coupler



Flexible Coupler


*1000mm, 2000mm, 3000mm, 4000mm length

STARTTM eco Emergency Bulkhead



Features

- Efficient LED emergency bulkhead
- 3 hour maintained or non maintained for internal & external application
- Manual test as standard
- Manufactured in robust housing to an impact rating of IK07 and is IP65 rated
- A full pack of ISO7010 compliant legends supplied
- Offering 170 lumen output with lifetime of 30,000 hours
- Complete with screws, washers and IP rated cable gland / clamp
- Housing RAL 9003 Signal White
- Push in terminal block
- Battery: 1800mAh 3.6V Ni-Cd
- Efficient thermal design: ta 0 to +35°C
- Complies with EN60598-2-22

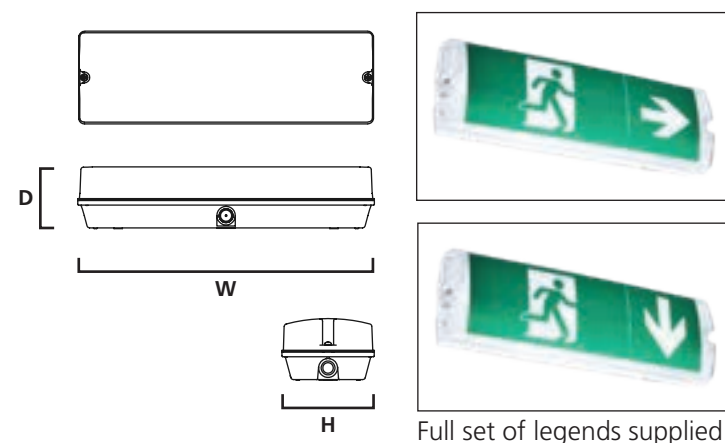

Size (W x H x D)	Wattage	Lumen
346mm x 110mm x 60mm	3.5W	170lm




For ordering guide please visit page 101.

* Battery warranty 1 year


sylvania-lighting.com

STARTTM eco Emergency Exit



Features

- Double sided 3 hour emergency exit signage (can be used as one sided if preferred)
- Surface mounted and suspended options available
- Surface mounted version can be used for wall or ceiling mounting with a 90 degree rotation
- Manual test function (including a test button)
- Maintained operation
- 3 hour maintained emergency
- Products include 7 ISO7010 Legends supplied. Left, Right, 2 x Up, 2 x Down and Blank
- Battery: 900mAh 3.6V Ni-Cd
- Efficient thermal design: ta 0 to +35°C
- Complies with EN60598-2-22
- Viewing Distance calculated to 30m




Size (W x H x D)

300mm x 185mm x 245mm

Wattage

2W



Size (W x H x D)

310mm x 230mm x 35mm

Wattage

3W




For ordering guide please visit page 101.

* Battery warranty 1 year


sylvania-lighting.com

STARTTM eco Emergency Spot

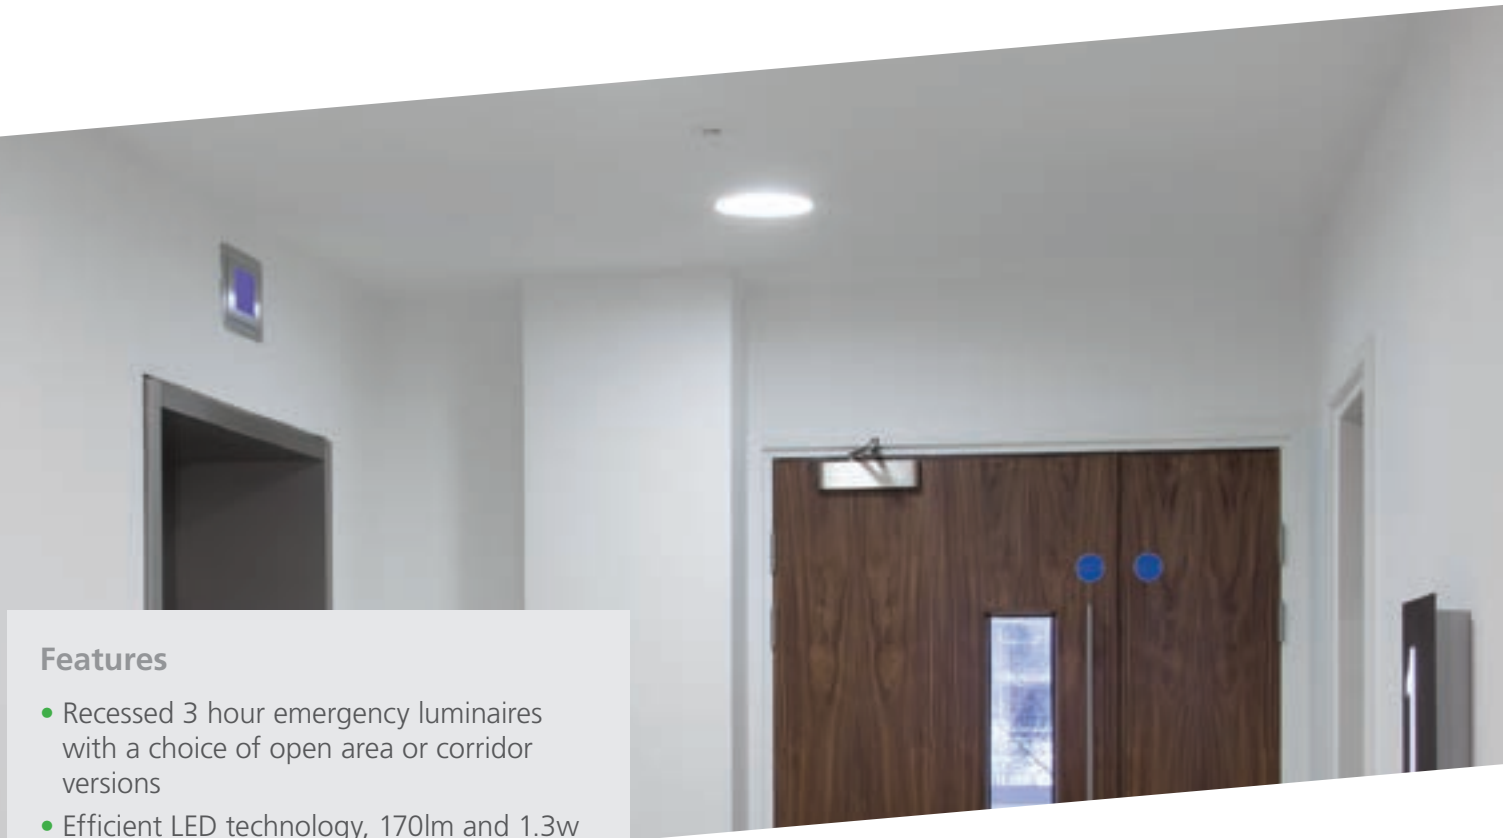

Features

- Recessed 3 hour emergency luminaires with a choice of open area or corridor versions
- Efficient LED technology, 170lm and 1.3w
- Non Maintained 3 hour emergency with manual test
- Complies with EN 60598-2-22
- RAL9003 Signal White bezel
- Ni-Cd Battery
- Polycarbonate Housing
- 35mm cut out
- Lifetime : 30,000 hours

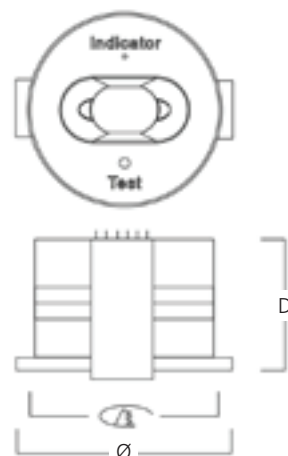

Size (Ø x D)	Cut Out	Wattage	Lumen
ø45mm x 22mm	ø35	1.3W	170lm




For ordering guide please visit page 101.

* Battery warranty 1 year

sylvania-lighting.com


SYLVANIA Sylsafe Spot

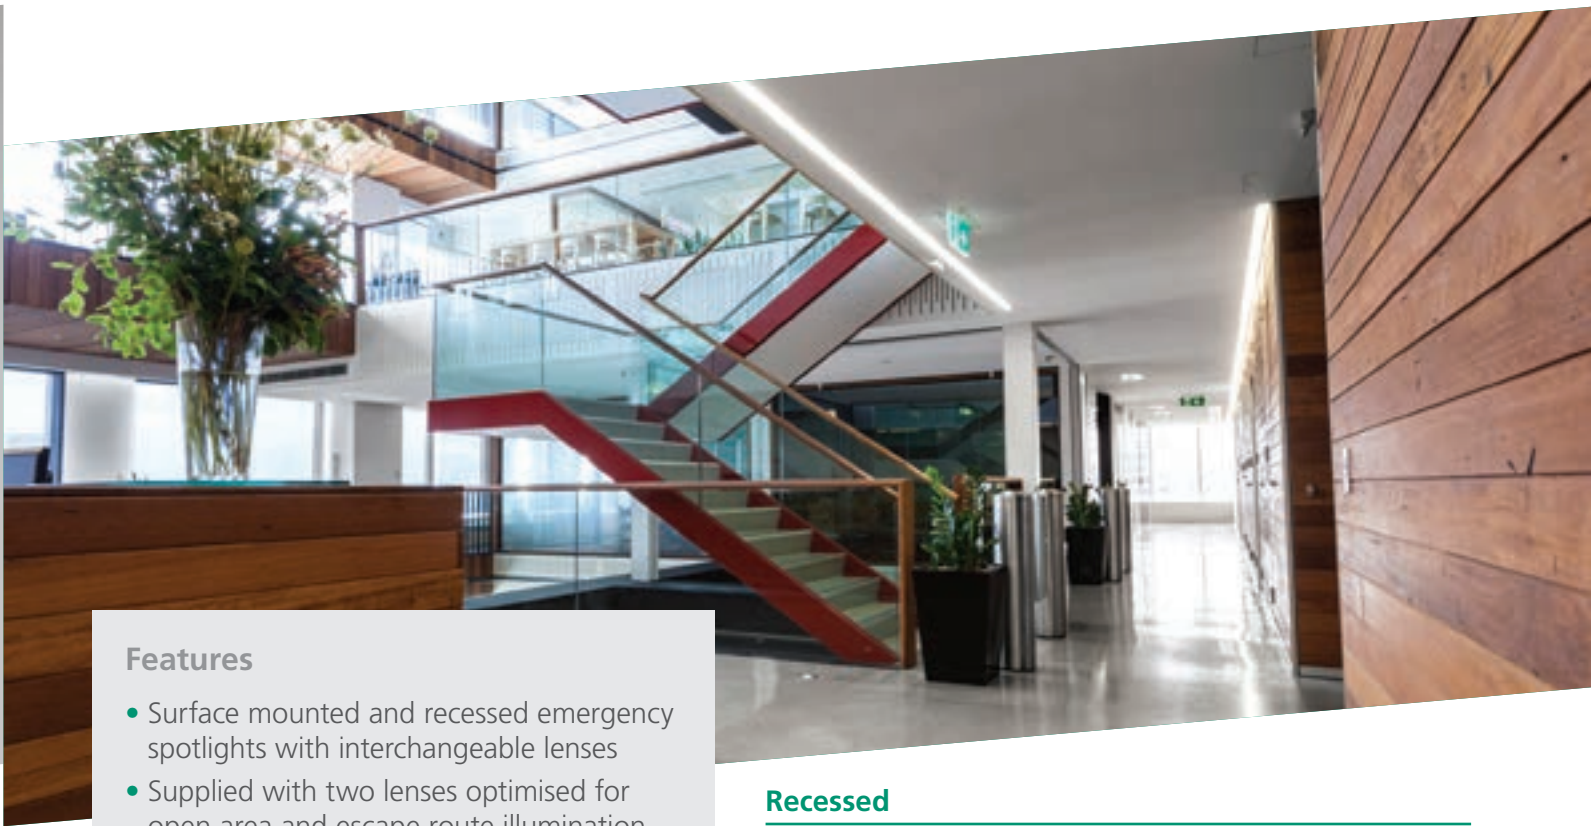


Features

- Surface mounted and recessed emergency spotlights with interchangeable lenses
- Supplied with two lenses optimised for open area and escape route illumination respectively
- Self contained version. Comes with 3 hour emergency duration as standard
- Autotest versions carry out regular tests automatically and use the indicator light to display results
- DALI versions are remote monitoring capable if connected to SylSafe N-LIGHT monitoring unit (sold separately)
- Available in 5700K or 6300K

Recessed

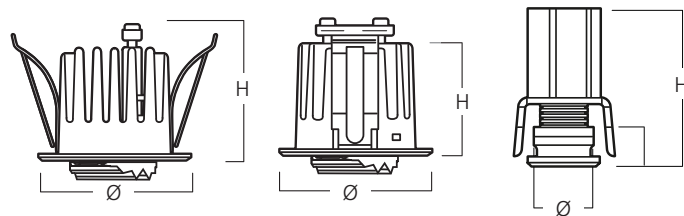

Surface



Size (Ø x H)	Wattage	Lumen
ø39mm x 41mm		300lm
ø50mm x 41mm		300lm
ø120mm x 44mm		145lm
ø12mm x 26.5mm		80lm



For ordering guide please visit page 101.

* Battery warranty 1 year

sylvania-lighting.com

SYLVANIA Sylsafe Exit




Features

- Emergency lighting fixtures for escape route marking
- All products come with ISO7010 compliant legend pack
- EC type legends are available as accessory
- Available in recessed, surface and wall mounting to fit any application
- EX versions are with rotateable blade allowing angled installation
- Self contained versions come with 3 hours duration as standard
- Central battery versions also available
- Autotest versions carry out regular tests automatically and use the indicator light to display results
- DALI versions are remote monitoring capable if connected to SylSafe N-LIGHT monitoring unit (sold separately)
- Viewing distance: 26m



Exit




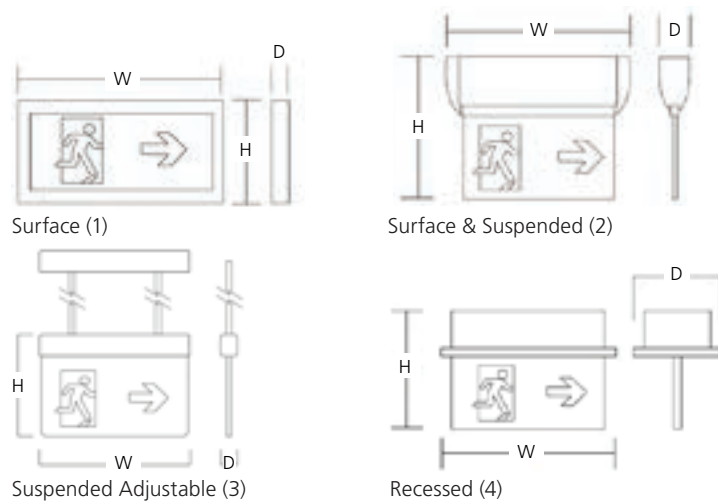


	Size (W x H x D)	Wattage	Lumen
1	315mm x 190mm x 30mm	-	300lm
2	300mm x 220mm x 50mm	-	300lm
3	385mm x 185mm x 71mm	-	145lm
4	355mm x 210mm x 112mm	-	80lm

* Battery warranty 1 year



sylvania-lighting.com

Exit Mod

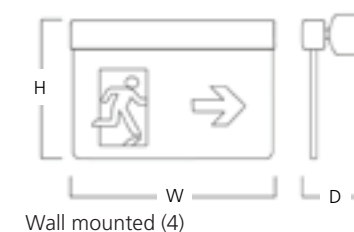

	Size (W x H x D)	Wattage (3 hours)	Wattage (Central battery)
1	300mm x 253mm x 57mm	4.9W	1.8W
2	300mm x 201mm x 49mm	4.9W	1.8W
3	300mm x 201mm x 49mm	4.9W	1.8W
4	300mm x 201mm x 49mm	4.9W	1.8W

Exit IP65

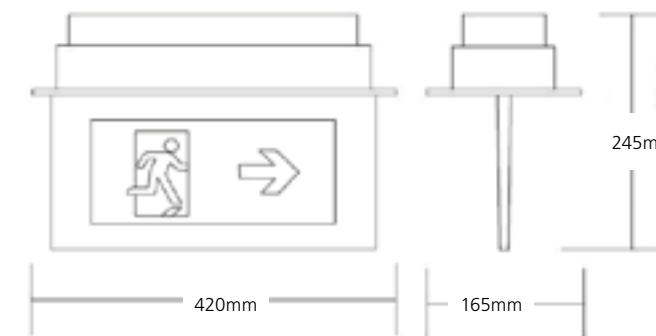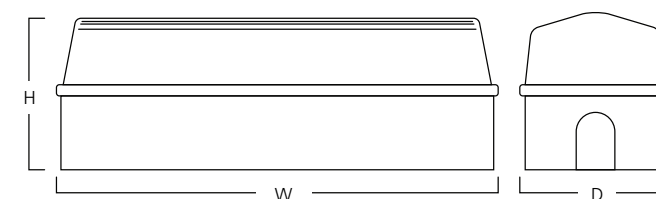

	Size (W x H x D)	Wattage	Lumen
	350mm x 90mm x 120mm	7W	135lm
	420mm x 245mm x 165mm	6.5W	135lm


sylvania-lighting.com

SYLVANIA Sylsafe N-Light



Features

- Simple to use live system status diagnostics for instant information
- Intuitive touch screen interface
- One screen monitors the whole floor
- 128 DALI addresses via two subnets
- Operates on its own. No need for PC
- Incorporates a long life replaceable battery for continuous operation even during power failure
- Works with SylSafe DALI products
- Compatible with: Sylsafe Exit, Sylsafe Spot, Emergency Pack, Sylsafe Twin

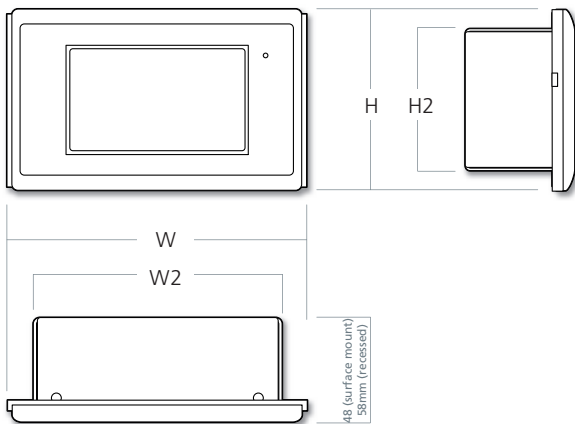

Size (W x H)	Cut Out (W2 x H2)	Wattage	Lumen
155mm x 92mm	133mm x 72mm	1.3W	170lm




For ordering guide please visit page 103.

* Battery warranty 1 year


sylvania-lighting.com

SYLVANIA Sylsafe Bay

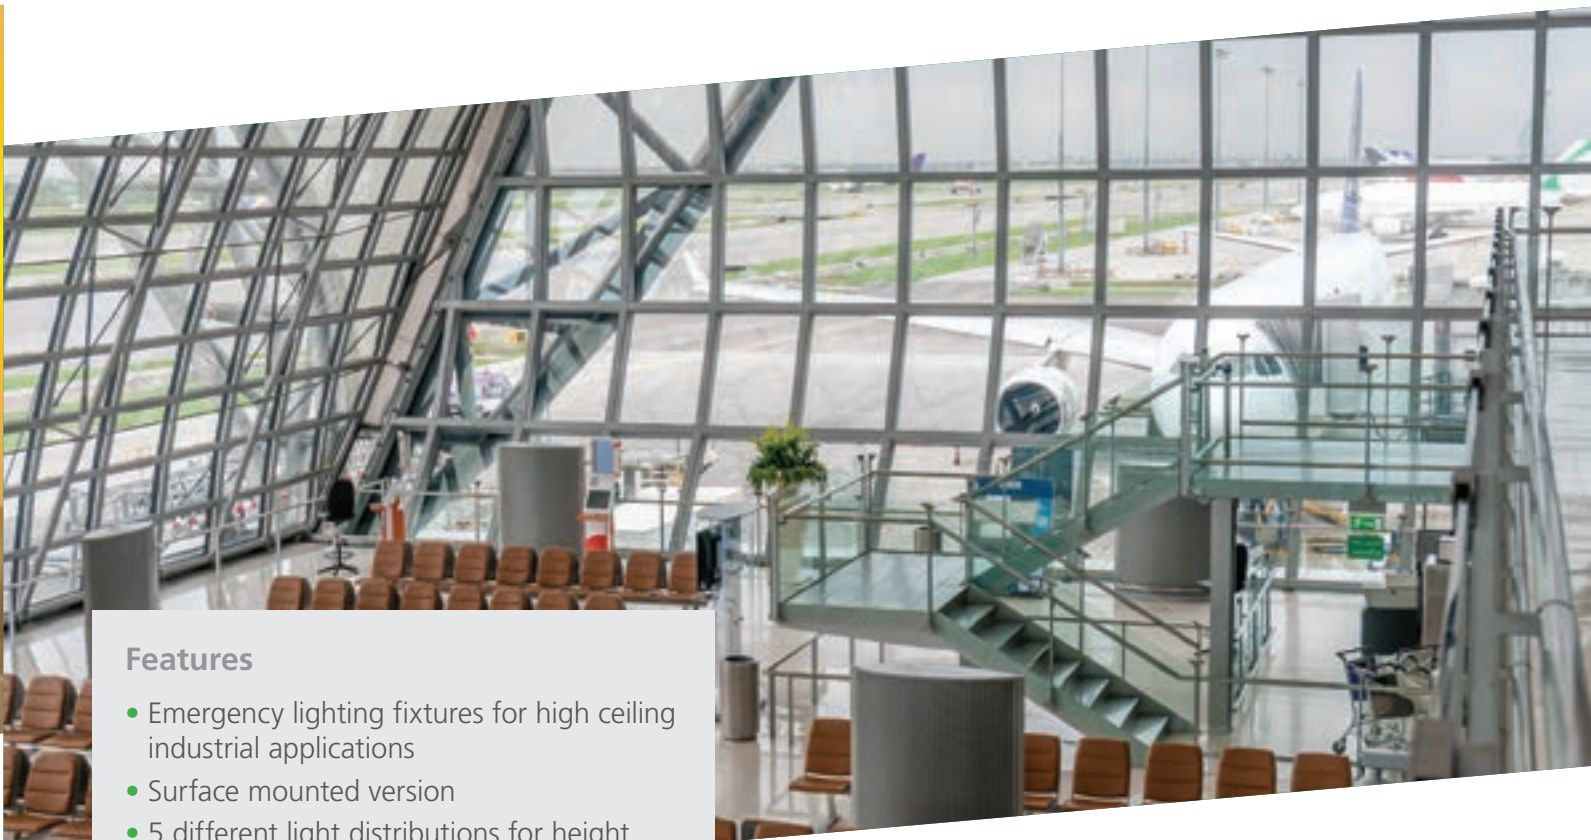

Features

- Emergency lighting fixtures for high ceiling industrial applications
- Surface mounted version
- 5 different light distributions for height flexibility
- Self contained versions come with 3 hours duration as standard
- Central battery versions also available
- Autotest versions carry out regular tests automatically and use the indicator light to display results
- DALI versions are remote monitoring capable if connected to SylSafe N-LIGHT monitoring unit (sold separately)
- Nominal luminous flux 200lm. Consult spacing tables for choosing the right optics
- Available in 5700K

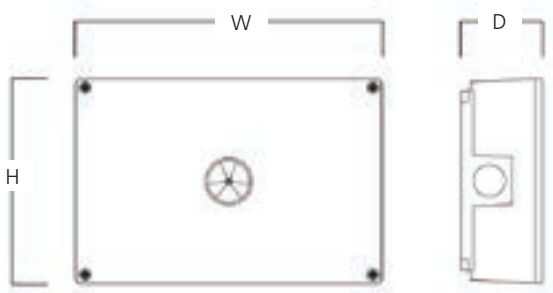

Size (W x H x D)	Wattage	Lumen
197mm x 132mm x 53mm	3W	177lm
197mm x 132mm x 53mm	3W	200lm
197mm x 132mm x 53mm	3W	217lm

For ordering guide please visit page 103.

* Battery warranty 1 year

sylvania-lighting.com


59

SYLVANIA Sylsafe Twin



Features

- Emergency lighting fixtures for large open areas or high ceiling installations
- Surface mounted version
- Self contained versions come with 3 hours duration as standard
- Two individually adjustable heads each delivering 200lm
- Autotest versions carry out regular tests automatically and use the indicator light to display results
- DALI versions are remote monitoring capable if connected to SylSafe N-LIGHT monitoring unit (sold separately)
- Available in 5000K or 5700K

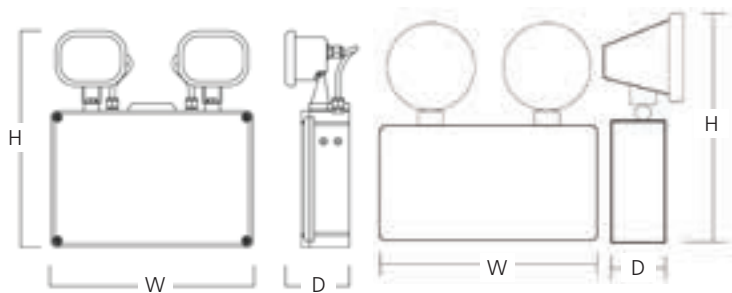

Size (W x H x D)	Wattage	Lumen
280mm x 300mm x 87mm	3.23W	2 x 200lm
275mm x 300mm x 55mm	2 x 3W	2 x 380lm




For ordering guide please visit page 103.

* Battery warranty 1 year

sylvania-lighting.com

SYLVANIA Routeled II

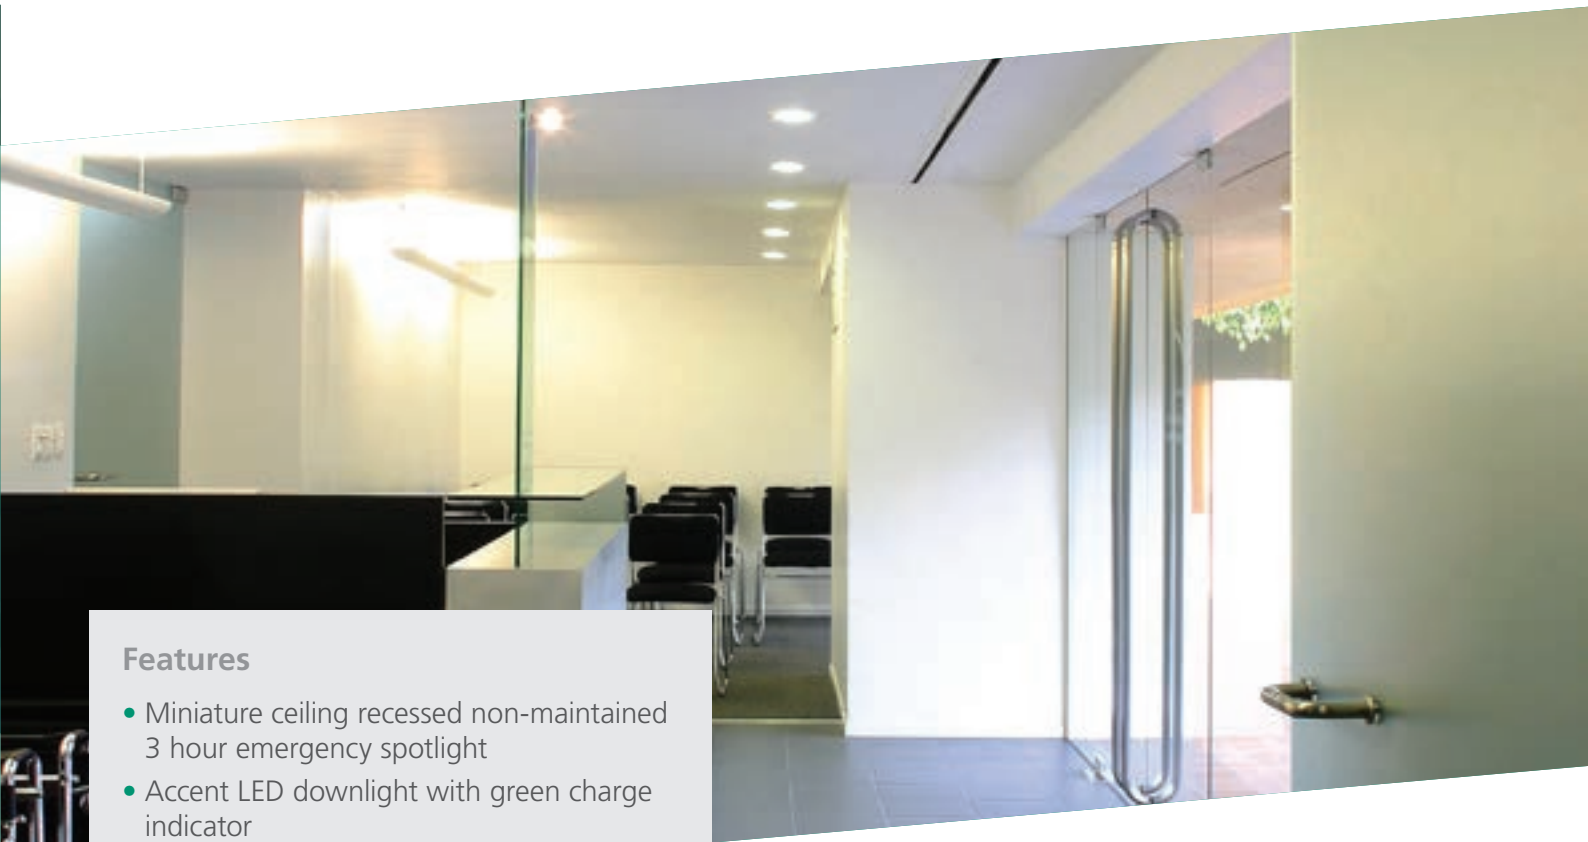


Features

- Miniature ceiling recessed non-maintained 3 hour emergency spotlight
- Accent LED downlight with green charge indicator
- Stand alone unit complete with inverter module and Nickel-Metal Hydride battery pack
- Inverter and battery pack pass through a 40mm cut-out
- Quick and easy installation with simple plug and socket connections
- Outstanding performance - 9m open area and 19m corridor spacing (see table below)
- Available in 5000K



For ordering guide please visit page 104.

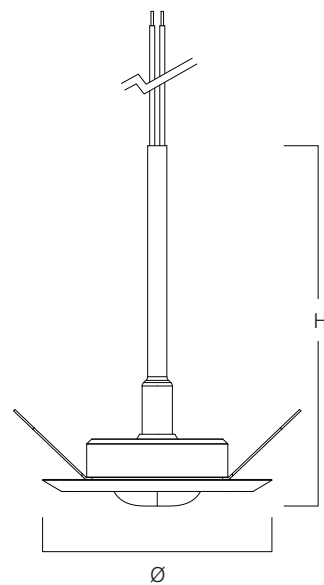

Size (Ø x D)	Wattage	Lumen
ø45.5mm x 75mm	2W	212lm
ø45.5mm x 75mm	2W	219lm

Accessories



Surface Mount



Emergency pack


* Battery warranty 1 year

sylvania-lighting.com

SYLVANIA Skyline Street



- Features**
- Ideal for major and minor road lighting applications
 - High efficiency, up to 128lm/W
 - Four different sizes available
 - LED lantern to replace traditional HID fixtures
 - Adjustable tilting positions from -15° to +15° on post top or side entry installations
 - Easy maintenance with tool-less opening
 - Opening gear cover hinges upwards
 - Available in Grey RAL 9022 colour finish as standard, other RAL colours on request
 - Fits onto 42-60mm side entry or post top spigot
 - Wide operating temperature range from -40 up to +50°C
 - Several controls possibilities (DALI, Photocell, other integrated Smart lighting technologies) on request
 - Long lifetime up to 100,000 hours

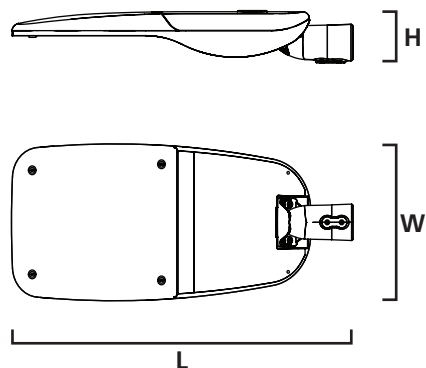

Size (L x W x H)	Wattage	Lumen
525mm x 255mm x 105mm	49W	5,869lm
625mm x 290mm x 105mm	103W	12,948lm
780mm x 325mm x 105mm	147W	17,029lm
NEW 915mm x 415mm x 140mm	244W	30,600lm




For ordering guide please visit page 105.

sylvania-lighting.com

Concord Skyline LED



- Features**
- Circular, architectural style LED Pole top to replace traditional HID fixtures
 - Ideal for amenity lighting, including car parks and perimeter lighting
 - High efficiency, up to 148lm/W
 - Available in both symmetric and asymmetric versions
 - Designed to fit onto 76 / 89mm pole top
 - Recommended for mounting heights of 4-10m
 - Light weight and compact luminaire in comparison to traditional alternative
 - Available in 4,000K
 - Long lifetime, up to 80,000 hours

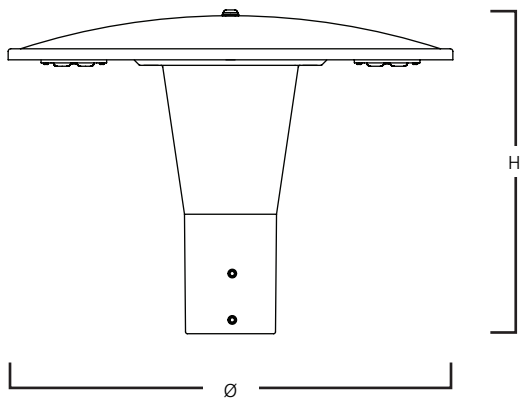

Size (Ø x H)	Wattage	Lumen
ø484mm x 352mm	47W	6,208lm
ø484mm x 352mm	74W	10,444lm
ø684mm x 445mm	120W	17,765lm
ø684mm x 445mm	158W	22,978lm



For ordering guide please visit page 104.

sylvania-lighting.com

Sylvania Optix Recessed

Product information

Product overview on page 14

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
Optix Recessed 600x600mm – Standard Output – 3000K – CRI80													
0044120	Optix Recessed 600x600 2L SO 3000K ALU	23	2,900	126	3,000	450	80	38	596	IP20	IK07	16	72,000
0044126	Optix Recessed 600x600 2L SO 3000K WHITE	21	2,800	133	3,000	400	80	38	596	IP20	IK07	19	72,000
0044123	Optix Recessed 600x600 2L SO 3000K ALU DALI	23	2,900	126	3,000	225	80	38	596	IP20	IK07	16	72,000
0044127	Optix Recessed 600x600 2L SO 3000K WHITE DALI	21	2,800	133	3,000	200	80	38	596	IP20	IK07	19	72,000
4000K - CRI80													
0044130	Optix Recessed 600x600 2L SO 4000K ALU	21	2,800	133	4,000	400	80	38	596	IP20	IK07	16	72,000
0044131	Optix Recessed 600x600 2L SO 4000K WHITE	20	2,850	143	4,000	375	80	38	596	IP20	IK07	19	72,000
0044135	Optix Recessed 600x600 2L SO 4000K ALU DALI	21	2,800	133	4,000	200	80	38	596	IP20	IK07	16	72,000
0044136	Optix Recessed 600x600 2L SO 4000K WHITE DALI	20	2,850	143	4,000	175	80	38	596	IP20	IK07	19	72,000
0044968	Optix Recessed 600x600 2L SO 4000K ALU SSA01	22	2,800	127	4,000	200	80	38	596	IP20	IK07	16	72,000
0044969	Optix Recessed 600x600 2L SO 4000K WHITE SSA01	21	2,850	136	4,000	180	80	38	596	IP20	IK07	19	72,000
0044152	Optix Recessed 600x600 2L SO 4000K ALU EM	21	2,800	133	4,000	400	80	38	596	IP20	IK07	16	72,000
0044150	Optix Recessed 600x600 2L SO 4000K WHITE EM	20	2,850	143	4,000	375	80	38	596	IP20	IK07	19	72,000
0044156	Optix Recessed 600x600 2L SO 4000K ALU DALI EM	21	2,800	133	4,000	200	80	38	596	IP20	IK07	16	72,000
0044154	Optix Recessed 600x600 2L SO 4000K WHITE DALI EM	20	2,850	143	4,000	180	80	38	596	IP20	IK07	19	72,000
0044110	Optix Recessed 600x600 3L SO 4000K ALU	21	2,900	138	4,000	400	80	38	596	IP20	IK07	16	72,000
0044111	Optix Recessed 600x600 3L SO 4000K WHITE	20	2,900	145	4,000	375	80	38	596	IP20	IK07	19	72,000
0044112	Optix Recessed 600x600 3L SO 4000K ALU DALI	21	2,900	138	4,000	125	80	38	596	IP20	IK07	16	72,000
0044113	Optix Recessed 600x600 3L SO 4000K WHITE DALI	20	2,900	145	4,000	125	80	38	596	IP20	IK07	19	72,000
Optix Recessed 600x600mm – Medium Output – 3000K – CRI80													
0044119	Optix Recessed 600x600 2L 3000K ALU	26	3,200	123	3,000	500	80	38	596	IP20	IK07	16	72,000
0044118	Optix Recessed 600x600 2L 3000K WHITE	26	3,450	133	3,000	500	80	38	596	IP20	IK07	19	72,000
0044122	Optix Recessed 600x600 2L 3000K ALU DALI	26	3,200	123	3,000	250	80	38	596	IP20	IK07	16	72,000
0044121	Optix Recessed 600x600 2L 3000K WHITE DALI	26	3,450	133	3,000	250	80	38	596	IP20	IK07	19	72,000
0044103	Optix Recessed 600x600 3L 3000K ALU	26	3,250	125	3,000	500	80	38	596	IP20	IK07	16	72,000
0044102	Optix Recessed 600x600 3L 3000K WHITE	26	3,550	137	3,000	500	80	38	596	IP20	IK07	19	72,000
0044105	Optix Recessed 600x600 3L 3000K ALU DALI	26	3,250	125	3,000	175	80	38	596	IP20	IK07	16	72,000
0044104	Optix Recessed 600x600 3L 3000K WHITE DALI	26	3,550	137	3,000	150	80	38	596	IP20	IK07	19	72,000
4000K - CRI80													
0044129	Optix Recessed 600x600 2L 4000K ALU	26	3,400	131	4,000	500	80	38	596	IP20	IK07	16	72,000
0044128	Optix Recessed 600x600 2L 4000K WHITE	23	3,350	146	4,000	450	80	38	596	IP20	IK07	19	72,000
0044134	Optix Recessed 600x600 2L 4000K ALU DALI	26	3,400	131	4,000	250	80	38	596	IP20	IK07	16	72,000
0044133	Optix Recessed 600x600 2L 4000K WHITE DALI	23	3,350	146	4,000	225	80	38	596	IP20	IK07	19	72,000
0044966	Optix Recessed 600x600 2L 4000K ALU SSA01	27	3,400	126	4,000	250	80	38	596	IP20	IK07	16	72,000
0044967	Optix Recessed 600x600 2L 4000K WHITE SSA01	24	3,400	142	4,000	230	80	38	596	IP20	IK07	19	72,000
0044151	Optix Recessed 600x600 2L 4000K ALU EM	26	3,400	131	4,000	500	80	38	596	IP20	IK07	16	72,000
0044149	Optix Recessed 600x600 2L 4000K WHITE EM	23	3,350	146	4,000	450	80	38	596	IP20	IK07	19	72,000
0044155	Optix Recessed 600x600 2L 4000K ALU DALI EM	26	3,400	131	4,000	250	80	38	596	IP20	IK07	16	72,000
0044153	Optix Recessed 600x600 2L 4000K WHITE DALI EM	23	3,350	146	4,000	225	80	38	596	IP20	IK07	19	72,000
0044107	Optix Recessed 600x600 3L 4000K ALU	26	3,600	138	4,000	500	80	38	596	IP20	IK07	16	72,000
0044106	Optix Recessed 600x600 3L 4000K WHITE	24	3,450	144	4,000	450	80	38	596	IP20	IK07	19	72,000
0044109	Optix Recessed 600x600 3L 4000K ALU DALI	26	3,600	138	4,000	175	80	38	596	IP20	IK07	16	72,000
0044108	Optix Recessed 600x600 3L 4000K WHITE DALI	24	3,450	144	4,000	150	80	38	596	IP20	IK07	19	72,000
0044143	Optix Recessed 600x600 3L 4000K ALU SSC	27	3,600	133	4,000	250	80	38	596	IP20	IK07	16	72,000

0044144	Optix Recessed 600x600 3L 4000K WHITE SSC	25	3,450	138	4,000	225	80	38	596	IP20	IK07	19	72,000
0044115	Optix Recessed 600x600 3L 4000K ALU EM	26	3,600	138	4,000	500	80	38	596	IP20	IK07	16	72,000
0044114	Optix Recessed 600x600 3L 4000K WHITE EM	24	3,450	144	4,000	450	80	38	596	IP20	IK07	19	72,000
0044117	Optix Recessed 600x600 3L 4000K ALU DALI EM	26	3,600	138	4,000	250	80	38	596	IP20	IK07	16	72,000
0044116	Optix Recessed 600x600 3L 4000K WHITE DALI EM	24	3,450	144	4,000	225	80	38	596	IP20	IK07	19	72,000
4000K - CRI90													
0044162	Optix Recessed 600x600 2L 4000K C9 ALU	30	3,550	118	4,000	600	90	38	596	IP20	IK07	16	72,000
0044161	Optix Recessed 600x600 2L 4000K C9 WHITE	28	3,500	125	4,000	550	90	38	596	IP20	IK07	19	72,000
0044164	Optix Recessed 600x600 2L 4000K C9 ALU DALI	30	3,550	118	4,000	300	90	38	596	IP20	IK07	16	72,000
0044163	Optix Recessed 600x600 2L 4000K C9 WHITE DALI	28	3,500	125	4,000	275	90	38	596	IP20	IK07	19	72,000
0044168	Optix Recessed 600x600 2L 4000K C9 ALU EM	30	3,550	118	4,000	600	90	38	596	IP20	IK07	16	72,000
0044167	Optix Recessed 600x600 2L 4000K C9 WHITE EM	28	3,500	125	4,000	550	90	38	596	IP20	IK07	19	72,000
Tunable White - CRI80													
0044170	Optix Recessed 600x600 3L TUNABLE WHITE ALU DALI	30	3,400	113	3,000-6,000	600	80	38	596	IP20	IK07	16	54,000
0044169	Optix Recessed 600x600 3L TUNABLE WHITE WHT DALI	30	3,600	120	3,000-6,000	600	80	38	596	IP20	IK07	19	54,000
0044172	Optix Recessed 600x600 3L TUNABLE WHITE ALU SSC01	31	3,400	110	3,000-6,000	600	80	38	596	IP20	IK07	16	54,000
0044171	Optix Recessed 600x600 3L TUNABLE WHITE WHT SSC01	31	3,600	116	3,000-6,000	600	80	38	596	IP20	IK07	19	54,000
Optix Recessed 600x600mm – High Output – 3000K – CRI80													
0044232	Optix Recessed 600x600 3L HO 3000K ALU	36	4,450	124	3,000	700	80	38	596	IP20	IK07	16	72,000
0044234	Optix Recessed 600x600 3L HO 3000K WHITE	34	4,600	135	3,000	650	80	38	596	IP20	IK07	19	72,000
0044233	Optix Recessed 600x600 3L HO 3000K ALU DALI	36	4,450	124	3,000	250	80	38	596	IP20	IK07	16	72,000
0044235	Optix Recessed 600x600 3L HO 3000K WHITE DALI	34	4,600	135	3,000	215	80	38	596	IP20	IK07	19	72,000
4000K - CRI80													
0044236	Optix Recessed 600x600 3L HO 4000K ALU	33	4,500	136	4,000	650	80	38	596	IP20	IK07	16	72,000
0044237	Optix Recessed 600x600 3L HO 4000K WHITE	31	4,550	147	4,000	600	80	38	596	IP20	IK07	19	72,000
0044238	Optix Recessed 600x600 3L HO 4000K ALU DALI	33	4,500	136	4,000	250	80	38	596	IP20	IK07	16	72,000
0044239	Optix Recessed 600x600 3L HO 4000K WHITE DALI	31	4,550	147	4,000	215	80	38	596	IP20	IK07	19	72,000
0044970	Optix Recessed 600x600 3L HO 4000K ALU SSA01	34	4,500	132	4,000	240	80	38	596	IP20	IK07	16	72,000
0044971	Optix Recessed 600x600 3L HO 4000K WHITE SSA01	32	4,550	142	4,000	210	80	38	596	IP20	IK07	19	72,000
0044243	Optix Recessed 600x600 3L HO 4000K ALU EM	33	4,500	136	4,000	650	80	38	596	IP20	IK07	16	72,000
0044242	Optix Recessed 600x600 3L HO 4000K WHITE EM	31	4,550	147	4,000	600	80	38	596	IP20	IK07	19	72,000
0044245	Optix Recessed 600x600 3L HO 4000K ALU DALI EM	33	4,500	136	4,000	250	80	38	596	IP20	IK07	16	72,000
0044244	Optix Recessed 600x600 3L HO 4000K WHITE DALI EM	31	4,550	147	4,000	215	80	38	596	IP20	IK07	19	72,000
Optix Recessed 625x625mm – Medium Output – 4000K – CRI80													
0044174	Optix Recessed 625x625 3L 4000K ALU	26	3,600	138	4,000	500	80	38	621	IP20	IK07	16	72,000
0044173	Optix Recessed 625x625 3L 4000K WHITE	24	3,450	144	4,000	450	80	38	621	IP20	IK07	19	72,000
0044176	Optix Recessed 625x625 3L 4000K ALU DALI	26	3,600	138	4,000	250	80	38	621	IP20	IK07	16	72,000
0044175	Optix Recessed 625x625 3L 4000K WHITE DALI	24	3,450	144	4,000	225	80	38	621	IP20	IK07	19	72,000
0044974	Optix Recessed 625x625 3L 4000K ALU SSA01	27	3,600	133	4,000	250	80	38	621	IP20	IK07	16	72,000
0044975	Optix Recessed 625x625 3L 4000K WHITE SSA01	25	3,450	138	4,000	230	80	38	621	IP20	IK07	19	72,000
0044180	Optix Recessed 625x625 3L 4000K ALU SSC	27	3,600	133	4,000	250	80	38	621	IP20	IK07	16	72,000
0044179	Optix Recessed 625x625 3L 4000K WHITE SSC	25	3,450	138	4,000	225	80	38	621	IP20	IK07	19	72,000
0044182	Optix Recessed 625x625 3L 4000K ALU EMCB	26	3,600	138	4,000	500	80	38	621	IP20	IK07	16	72,000
0044181	Optix Recessed 625x625 3L 4000K WHITE EMCB	24	3,450	144	4,000	450	80	38	621	IP20	IK07	19	72,000
Tunable White - CRI80													
0044125	Optix Recessed 625x625 3L TUNABLE WHITE ALU DALI	30	3,400	113	3,000-6,000	600	80	38	621	IP20	IK07	16	54,000
0044124	Optix Recessed 625x625 3L TUNABLE WHITE WHT DALI	30	3,600	120	3,000-6,000	600	80	38	621	IP20	IK07	19	54,000
0044203	Optix Recessed 625x625 3L TUNABLE WHITE ALU SSC01	31	3,400	110	3,000-6,000	600	80	38	621	IP20	IK07	16	54,000
0044200	Optix Recessed 625x625 3L TUNABLE WHITE WHT SSC01	31	3,600	116	3,000-6,000	600	80	38	621	IP20	IK07	19	54,000

Optix Recessed 1200x300mm – Medium Output – 3000K – CRI80													
0044183	Optix Recessed 1200X300 1L 3000K ALU	26	3,200	123	3,000	500	80	38	1,196	IP20	IK07	16	72,000
0044184	Optix Recessed 1200X300 1L 3000K ALU DALI	26	3,200	123	3,000	250	80	38	1,196	IP20	IK07	16	72,000
0044190	Optix Recessed 1200x300 2L 3000K ALU	26	3,250	125	3,000	500	80	38	1,196	IP20	IK07	16	72,000
0044189	Optix Recessed 1200x300 2L 3000K WHITE	26	3,550	137	3,000	500	80	38	1,196	IP20	IK07	19	72,000
0044193	Optix Recessed 1200x300 2L 3000K ALU DALI	26	3,250	125	3,000	250	80	38	1,196	IP20	IK07	16	72,000
0044192	Optix Recessed 1200x300 2L 3000K WHITE DALI	26	3,550	137	3,000	250	80	38	1,196	IP20	IK07	19	72,000
4000K - CRI80													
0044185	Optix Recessed 1200X300 1L 4000K ALU	27	3,400	126	4,000	500	80	38	1,196	IP20	IK07	16	72,000
0044186	Optix Recessed 1200X300 1L 4000K ALU DALI	27	3,400	126	4,000	250	80	38	1,196	IP20	IK07	16	72,000
0044187	Optix Recessed 1200X300 1L 4000K ALU EM	27	3,400	126	4,000	500	80	38	1,196	IP20	IK07	16	72,000
0044188	Optix Recessed 1200X300 1L 4000K ALU DALI EM	27	3,400	126	4,000	250	80	38	1,196	IP20	IK07	16	72,000
0044196	Optix Recessed 1200x300 2L 4000K ALU	26	3,600	138	4,000	500	80	38	1,196	IP20	IK07	16	72,000
0044195	Optix Recessed 1200x300 2L 4000K WHITE	24	3,450	144	4,000	450	80	38	1,196	IP20	IK07	19	72,000
0044199	Optix Recessed 1200x300 2L 4000K ALU DALI	26	3,600	138	4,000	250	80	38	1,196	IP20	IK07	16	72,000
0044198	Optix Recessed 1200x300 2L 4000K WHITE DALI	24	3,450	144	4,000	225	80	38	1,196	IP20	IK07	19	72,000
0044976	Optix Recessed 1200x300 2L 4000K ALU SSA01	27	3,600	133	4,000	250	80	38	1,196	IP20	IK07	16	72,000
0044977	Optix Recessed 1200x300 2L 4000K WHITE SSA01	25	3,500	140	4,000	230	80	38	1,196	IP20	IK07	19	72,000
0044145	Optix Recessed 1200x300 2L 4000K ALU SSC	27	3,600	133	4,000	250	80	38	1,196	IP20	IK07	16	72,000
0044146	Optix Recessed 1200x300 2L 4000K WHITE SSC	25	3,450	138	4,000	225	80	38	1,196	IP20	IK07	19	72,000
0044205	Optix Recessed 1200x300 2L 4000K ALU EM	26	3,600	138	4,000	500	80	38	1,196	IP20	IK07	16	72,000
0044204	Optix Recessed 1200x300 2L 4000K WHITE EM	24	3,450	144	4,000	450	80	38	1,196	IP20	IK07	19	72,000
0044207	Optix Recessed 1200x300 2L 4000K ALU DALI EM	26	3,600	138	4,000	250	80	38	1,196	IP20	IK07	16	72,000
0044206	Optix Recessed 1200x300 2L 4000K WHITE DALI EM	24	3,450	144	4,000	225	80	38	1,196	IP20	IK07	19	72,000
4000K - CRI90													
0044211	Optix Recessed 1200x300 2L 4000K C9 ALU	28	3,500	125	4,000	550	90	38	1,196	IP20	IK07	16	72,000
0044210	Optix Recessed 1200x300 2L 4000K C9 WHITE	25	3,500	140	4,000	500	90	38	1,196	IP20	IK07	19	72,000
0044213	Optix Recessed 1200x300 2L 4000K C9 ALU DALI	28	3,500	125	4,000	275	90	38	1,196	IP20	IK07	16	72,000
0044212	Optix Recessed 1200x300 2L 4000K C9 WHITE DALI	25	3,500	140	4,000	250	90	38	1,196	IP20	IK07	19	72,000
0044217	Optix Recessed 1200x300 2L 4000K C9 ALU EM	28	3,500	125	4,000	550	90	38	1,196	IP20	IK07	16	72,000
0044216	Optix Recessed 1200x300 2L 4000K C9 WHITE EM	25	3,500	140	4,000	500	90	38	1,196	IP20	IK07	19	72,000
Tunable White - CRI80													
0044219	Optix Recessed 1200x300 2L TUNABLE WHITE ALU DALI	30	3,200	107	3,000-6,000	600	80	38	1,196	IP20	IK07	16	54,000
0044218	Optix Recessed 1200x300 2L TUNABLE WHITE WHT DALI	30	3,600	120	3,000-6,000	600	80	38	1,196	IP20	IK07	19	54,000
0044221	Optix Recessed 1200x300 2L TUNABLE WHITE ALU SSC01	31	3,200	103	3,000-6,000	600	80	38	1,196	IP20	IK07	16	54,000
0044220	Optix Recessed 1200x300 2L TUNABLE WHITE WHT SSC01	31	3,600	116	3,000-6,000	600	80	38	1,196	IP20	IK07	19	54,000
Optix Recessed 1250x310mm – Medium Output – 4000K – CRI80													
0044223	Optix Recessed 1250x310 2L 4000K ALU	26	3,600	138	4,000	500	80	38	1,246	IP20	IK07	16	72,000
0044222	Optix Recessed 1250x310 2L 4000K WHITE	24	3,450	144	4,000	450	80	38	1,246	IP20	IK07	19	72,000
0044225	Optix Recessed 1250x310 2L 4000K ALU DALI	26	3,600	138	4,000	250	80	38	1,246	IP20	IK07	16	72,000
0044224	Optix Recessed 1250x310 2L 4000K WHITE DALI	24	3,450	144	4,000	225	80	38	1,246	IP20	IK07	19	72,000
0044980	Optix Recessed 1250x310 2L 4000K ALU SSA01	27	3,600	133	4,000	250	80	38	1,246	IP20	IK07	16	72,000
0044981	Optix Recessed 1250x310 2L 4000K WHITE SSA01	25	3,500	140	4,000	230	80	38	1,246	IP20	IK07	19	72,000
0044229	Optix Recessed 1250x310 2L 4000K ALU SSC	27	3,600	133	4,000	250	80	38	1,246	IP20	IK07	16	72,000
0044228	Optix Recessed 1250x310 2L 4000K WHITE SSC	25	3,450	138	4,000	225	80	38	1,246	IP20	IK07	19	72,000
0044231	Optix Recessed 1250x310 2L 4000K ALU EMCB	26	3,600	138	4,000	500	80	38	1,246	IP20	IK07	16	72,000
0044230	Optix Recessed 1250x310 2L 4000K WHITE EMCB	24	3,450	144	4,000	450	80	38	1,246	IP20	IK07	19	72,000
4000K – CRI90													
0044297	Optix Recessed 1250x310 2L 4000K C9 ALU DALI	28	3,500	125	4,000	275	90	38	1,246	IP20	IK07	16	72,000
0044296	Optix Recessed 1250x310 2L 4000K C9 WHT DALI	25	3,500	140	4,000	250	90	38	1,246	IP20	IK07	19	72,000

Tunable White - CRI80													
0044197	Optix Recessed 1250X310 2L TUNABLE WHITE ALU DALI	30	3,200	107	3,000-6,000	600	80	38	1,246	IP20	IK07	16	54,000
0044194	Optix Recessed 1250X310 2L TUNABLE WHITE WHT DALI	30	3,600	120	3,000-6,000	600	80	38	1,246	IP20	IK07	19	54,000
0044148	Optix Recessed 1250X310 2L TUNABLE WHITE ALU SSC01	31	3,200	103	3,000-6,000	600	80	38	1,246	IP20	IK07	16	54,000
0044147	Optix Recessed 1250X310 2L TUNABLE WHITE WHT SSC01	31	3,600	116	3,000-6,000	600	80	38	1,246	IP20	IK07	19	54,000

Accessories	
Code	Description
0044248	Optix Recessed Pull up kit
0044249	Optix Recessed Surface Mounted Kit 600X600

Sylvania Optix Linear Recessed

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
3000K - CRI80													
0045501	Optix Linear Recessed 1200 3K ALU	26	3,200	123	4,000	500	80	90	1,146	20	07	19	72,000
0045502	Optix Linear Recessed 1200 3K ALU DA	26	3,200	123	4,000	250	80	90	1,146	20	07	19	72,000
4000K - CRI80													
0045503	Optix Linear Recessed 1200 4K ALU	26	3,400	131	4,000	500	80	90	1,146	20	07	19	72,000
0045504	Optix Linear Recessed 1200 4K ALU DA	26	3,400	131	4,000	250	80	90	1,146	20	07	19	72,000
0044960	Optix Linear Recessed 1200 4K ALU SSA01	27	3,400	126	4,000	250	80	90	1,169	20	07	19	72,000
0045506	Optix Linear Recessed 1200 4K ALU SSC	27	3,400	126	4,000	500	80	90	1,146	20	07	19	72,000
0045507	Optix Linear Recessed 1200 4K ALU EM	28	3,400	121	4,000	500	80	90	1,169	20	07	19	72,000
0045508	Optix Linear Recessed 1200 4K ALU DA EM	28	3,400	121	4,000	250	80	90	1,169	20	07	19	72,000
0045510	Optix Linear Recessed 1200 4K ALU SSC EM	29	3,400	117	4,000	500	80	90	1,169	20	07	19	72,000
4000K - CRI90													
0045511	Optix Linear Recessed 1200 4K C9 ALU DA	30	3,650	122	4,000	300	90	90	1,146	20	07	19	72,000
0045512	Optix Linear Recessed 1200 4K C9 ALU DA EM	32	3,650	114	4,000	300	90	90	1,169	20	07	19	72,000
TW - CRI80													
0045513	Optix Linear Recessed 1200 TW ALU DA	21	2,200	105	3,000-6,000	400	80	90	1,146	20	07	16	72,000
0045514	Optix Linear Recessed 1200 TW ALU SSC	22	2,200	105	3,000-6,000	400	80	90	1,146	20	07	16	72,000
0045515	Optix Linear Recessed 1200 TW ALU DA EM	24	2,200	92	3,000-6,000	400	80	90	1,169	20	07	16	72,000
0045516	Optix Linear Recessed 1200 TW ALU SSC EM	25	2,200	88	3,000-6,000	400	80	90	1,169	20	07	16	72,000

Accessories	
Code	Description
Mechanical Accessories	
0044251	Optix Linear Recessed ACC Bracket 1-20MM X1
0044252	Optix Linear Recessed ACC Bracket 1-20MM X5
0044253	Optix Linear Recessed ACC Bracket 21-40MM X1
0044254	Optix Linear Recessed ACC Bracket 21-40MM X5
0044259	Optix Linear Recessed ACC U Joiner kit
Through Wiring Accessories	
0044255	Optix Linear ACC Through Wire 3X1,5MM2
0044256	Optix Linear ACC Through Wire 4X1,5MM2
0044257	Optix Linear ACC Through Wire 3X1,5+2X0,5MM2
0044258	Optix Linear ACC Through Wire 2X0,5+2X0,5MM2

Concord Lytepanel

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
Recessed 600 x 600													
2059432	Lytepanel II 600 4K DALI	31	4454	144	4000	275	80	95	595	IP40	IK02	21	60,000
2059433	Lytepanel II 600 4K DALI EM	35	4454	127	4000	275	80	95	595	IP40	IK02	21	60,000
2059500	Lytepanel II 600 4K UGR DALI	31	3920	126	4000	275	80	95	595	IP40	IK02	18	60,000
2059501	Lytepanel II 600 4K UGR DALI EM	35	3920	112	4000	275	80	95	595	IP40	IK02	18	60,000
Surface & Suspended 600 x 600													
2059434	Lytepanel II 600 4K DALI SM	31	4454	144	4000	275	80	95	610	IP40	IK02	21	60,000
2059435	Lytepanel II 600 4K DALI EM SM	35	4454	127	4000	275	80	95	610	IP40	IK02	21	60,000
2059502	Lytepanel II 600 4K UGR DALI SM	31	3920	126	4000	275	80	95	610	IP40	IK02	18	60,000
2059503	Lytepanel II 600 4K UGR DALI EM SM	35	3920	112	4000	275	80	95	610	IP40	IK02	18	60,000
Surface & Suspended 1200 x 300													
2059438	Lytepanel II 1200 4K DALI SM	31	4349	140	4000	275	80	95	1260	IP40	IK02	21	60,000
2059439	Lytepanel II 1200 4K DALI EM SM	35	4349	124	4000	275	80	95	1260	IP40	IK02	21	60,000
2059506	Lytepanel II 1200 4K UGR DALI SM	31	3775	122	4000	275	80	95	1260	IP40	IK02	18	60,000
2059507	Lytepanel II 1200 4K UGR DALI EM SM	35	3775	108	4000	275	80	95	1260	IP40	IK02	18	60,000
2059511	Lytepanel II 1200 3K UGR DALI SM	31	3542	114	3000	275	80	95	1260	IP40	IK02	18	60,000
Recessed 1200 x 300													
2059437	Lytepanel II 1200 4K DALI EM	35	4349	124	4000	275	80	95	1195	IP40	IK02	21	60,000
2059504	Lytepanel II 1200 4K UGR DALI	31	3775	122	4000	275	80	95	1195	IP40	IK02	18	60,000
2059505	Lytepanel II 1200 4K UGR DALI EM	35	3775	108	4000	275	80	95	1195	IP40	IK02	18	60,000

Concord Pixer

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
600 x 600													
2069346	Pixer Recessed 600X600 HE 4P 3000K DALI	25	3550	142	3000	900	80	75	595	IP20	IK07	19	72,000
2069347	Pixer Recessed 600X600 HE 4P 3000K SSH01	26	3550	137	3000	900	80	75	595	IP20	IK07	19	72,000
2069348	Pixer Recessed 600X600 HE 4P 3000K SSC01	26	3550	137	3000	900	80	75	595	IP20	IK07	19	72,000
2069349	Pixer Recessed 600X600 HE 4P 4000K DALI	25	3750	150	4000	900	80	75	595	IP20	IK07	19	72,000
2069350	Pixer Recessed 600X600 HE 4P 4000K SSH01	26	3750	144	4000	900	80	75	595	IP20	IK07	19	72,000
2069351	Pixer Recessed 600X600 HE 4P 4000K SSC01	26	3750	144	4000	900	80	75	595	IP20	IK07	19	72,000
2069352	Pixer Recessed 600X600 HE 4P 4000K DALI EM	28	3750	134	4000	900	80	75	595	IP20	IK07	19	72,000
2069353	Pixer Recessed 600X600 HE 4P 4000K DALI EMD	28	3750	134	4000	900	80	75	595	IP20	IK07	19	72,000
2069354	Pixer Recessed 600X600 HE 4P 4000K DALI CB EM	25	3750	150	4000	900	80	75	595	IP20	IK07	19	72,000
2069355	Pixer Recessed 600X600 HE 4P 4000K SSH01 EM	29	3750	129	4000	900	80	75	595	IP20	IK07	19	72,000
2069356	Pixer Recessed 600X600 HE 4P 4000K SSC01 EM	29	3750	129	4000	900	80	75	595	IP20	IK07	19	72,000
2069357	Pixer Recessed 600X600 4P TW DALI	32	3400	106	3000	950	80	76	595	IP20	IK07	19	72,000
2069358	Pixer Recessed 600X600 4P TW SSC01	32	3400	106	3000	950	80	76	595	IP20	IK07	19	72,000
2069359	Pixer Recessed 600X600 HE 4P 4000K9 DALI	25	3254	130	4000	900	90	75	595	IP20	IK07	19	72,000
2069360	Pixer Recessed 600X600 HE 4P 4000K9 SSH01	26	3254	125	4000	900	90	75	595	IP20	IK07	19	72,000
2069361	Pixer Recessed 600X600 HE 4P 4000K9 SSC01	26	3254	125	4000	900	90	75	595	IP20	IK07	19	72,000
2069362	Pixer Recessed 600X600 HE 4P 4000K9 DALI EM	28	3254	116	4000	900	90	75	595	IP20	IK07	19	72,000
2069363	Pixer Recessed 600X600 HO 4P 4000K DALI	36	4750	132	4000	1200	80	75	595	IP20	IK07	19	72,000
2069364	Pixer Recessed 600X600 HO 4P 4000K SSH01	37	4750	128	4000	1200	80	75	595	IP20	IK07	19	72,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
2069365	Pixer Recessed 600X600 HO 4P 4000K SSC01	37	4750	128	4000	1200	80	75	595	IP20	IK07	19	72,000
2069366	Pixer Recessed 600X600 HO 4P 4000K DALI EM	39	4750	122	4000	1200	80	75	595	IP20	IK07	19	72,000
2069367	Pixer Recessed 600X600 HO 4P 4000K DALI EMD	39	4750	122	4000	1200	80	75	595	IP20	IK07	19	72,000
2069368	Pixer Recessed 600X600 HO 4P 4000K DALI CB EM	36	4750	132	4000	1200	80	75	595	IP20	IK07	19	72,000
2069369	Pixer Recessed 600X600 HO 4P 4000K SSH01 EM	40	4750	119	4000	1200	80	75	595	IP20	IK07	19	72,000
2069370	Pixer Recessed 600X600 HO 4P 4000K SSC01 EM	40	4750	119	4000	1200	80	75	595	IP20	IK07	19	72,000
2069373	Pixer Recessed 600X600 HO 4P 4000K9 DALI	36	4152	115	4000	1200	90	75	595	IP20	IK07	19	72,000
2069374	Pixer Recessed 600X600 HO 4P 4000K9 SSH01	37	4152	112	4000	1200	90	75	595	IP20	IK07	19	72,000
2069375	Pixer Recessed 600X600 HO 4P 4000K9 SSC01	37	4152	112	4000	1200	90	75	595	IP20	IK07	19	72,000
2069376	Pixer Recessed 600X600 HO 4P 4000K9 DALI EM	39	4152	106	4000	1200	90	75	595	IP20	IK07	19	72,000
2069424	Pixer Recessed 600X600 HO 4P 3000K DALI	36	4500	125	3000	1200	80	75	595	IP20	IK07	19	72,000
2069425	Pixer Recessed 600X600 HO 4P 3000K SSH01	37	4500	122	3000	1200	80	75	595	IP20	IK07	19	72,000
2069426	Pixer Recessed 600X600 HO 4P 3000K SSC01	37	4500	122	3000	1200	80	75	595	IP20	IK07	19	72,000
1200 x 300													
2069385	Pixer Recessed 1200X300 HE 4P 3000K DALI	25	3550	142	3000	900	80	75	1195	IP20	IK07	19	72,000
2069386	Pixer Recessed 1200X300 HE 4P 3000K SSH01	26	3550	137	3000	900	80	75	1195	IP20	IK07	19	72,000
2069387	Pixer Recessed 1200X300 HE 4P 3000K SSC01	26	3550	137	3000	900	80	75	1195	IP20	IK07	19	72,000
2069388	Pixer Recessed 1200X300 HE 4P 4000K DALI	25	3700	148	4000	900	80	75	1195	IP20	IK07	19	72,000
2069389	Pixer Recessed 1200X300 HE 4P 4000K SSH01	26	3700	142	4000	900	80	75	1195	IP20	IK07	19	72,000
2069390	Pixer Recessed 1200X300 HE 4P 4000K SSC01	26	3700	142	4000	900	80	75	1195	IP20	IK07	19	72,000
2069391	Pixer Recessed 1200X300 HE 4P 4000K DALI EM	28	3700	132	4000	900	80	75	1195	IP20	IK07	19	72,000
2069392	Pixer Recessed 1200X300 HE 4P 4000K DALI EMD	28	3700	132	4000	900	80	75	1195	IP20	IK07	19	72,000
2069393	Pixer Recessed 1200X300 HE 4P 4000K DALI CB EM	25	3700	148	4000	900	80	75	1195	IP20	IK07	19	72,000
2069394	Pixer Recessed 1200X300 HE 4P 4000K SSH01 EM	29	3700	128	4000	900	80	75	1195	IP20	IK07	19	72,000
2069395	Pixer Recessed 1200X300 HE 4P 4000K SSC01 EM	29	3700	128	4000	900	80	75	1195	IP20	IK07	19	72,000
2069396	Pixer Recessed 1200X300 4P TW DALI	32	3400	106	3000	950	80	76	1195	IP20	IK07	19	72,000
2069397	Pixer Recessed 1200X300 4P TW SSC01	32	3400	106	3000	950	80	76	1195	IP20	IK07	19	72,000
2069398	Pixer Recessed 1200X300 HE 4P 4000K9 DALI	25	3283	131	4000	900	90	75	1195	IP20	IK07	19	72,000
2069399	Pixer Recessed 1200X300 HE 4P 4000K9 SSH01	26	3283	126	4000	900	90	75	1195	IP20	IK07	19	72,000
2069400	Pixer Recessed 1200X300 HE 4P 4000K9 SSC01	26	3283	126	4000	900	90	75	1195	IP20	IK07	19	72,000
2069401	Pixer Recessed 1200X300 HE 4P 4000K9 DALI EM	28	3283	117	4000	900	90	75	1195	IP20	IK07	19	72,000
2069402	Pixer Recessed 1200X300 HO 4P 4000K DALI	36	4700	131	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069403	Pixer Recessed 1200X300 HO 4P 4000K SSH01	37	4700	127	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069404	Pixer Recessed 1200X300 HO 4P 4000K SSC01	37	4700	127	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069405	Pixer Recessed 1200X300 HO 4P 4000K DALI EM	39	4700	121	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069406	Pixer Recessed 1200X300 HO 4P 4000K DALI EMD	39	4700	121	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069407	Pixer Recessed 1200X300 HO 4P 4000K DALI CB EM	36	4700	131	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069408	Pixer Recessed 1200X300 HO 4P 4000K SSH01 EM	40	4700	118	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069409	Pixer Recessed 1200X300 HO 4P 4000K SSC01 EM	40	4700	118	4000	1200	80	75	1195	IP20	IK07	19	72,000
2069412	Pixer Recessed 1200X300 HO 4P 4000K9 DALI	36	4156	115	4000	1200	90	75	1195	IP20	IK07	19	72,000
2069413	Pixer Recessed 1200X300 HO 4P 4000K9 SSH01	37	4156	112	4000	1200	90	75	1195	IP20	IK07	19	72,000
2069414	Pixer Recessed 1200X300 HO 4P 4000K9 SSC01	37	4156	112	4000	1200	90	75	1195	IP20	IK07	19	72,000
2069415	Pixer Recessed 1200X300 HO 4P 4000K9 DALI EM	39	4156	107	4000	1200	90	75	1195	IP20	IK07	19	72,000
2069427	Pixer Recessed 1200X300 HO 4P 3000K DALI	36	4500	125	3000	1200	80	75	1195	IP20	IK07	19	72,000
2069428	Pixer Recessed 1200X300 HO 4P 3000K SSH01	36	4500	122	3000	1200	80	75	1195	IP20	IK07	19	72,000
2069429	Pixer Recessed 1200X300 HO 4P 3000K SSC01	36	4500	122	3000	1200	80	75	1195	IP20	IK07	19	72,000
625 x 625													
2069377	Pixer Recessed 625X625 HE 4P 4000K DALI	25	3750	150	4000	900	80	75	620	IP20	IK07	19	72,000
2069378	Pixer Recessed 625X625 HE 4P 4000K DALI CB EM	25	3750	150	4000	900	80	75	620	IP20	IK07	19	72,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
2069379	Pixier Recessed 625X625 HE 4P 4000K SSH01	26	3750	144	4000	900	80	75	620	IP20	IK07	19	72,000
2069380	Pixier Recessed 625X625 HE 4P 4000K SSC01	26	3750	144	4000	900	80	75	620	IP20	IK07	19	72,000
2069381	Pixier Recessed 625X625 HO 4P 4000K DALI	36	4750	132	4000	1200	80	75	620	IP20	IK07	19	72,000
2069382	Pixier Recessed 625X625 HO 4P 4000K DALI CB EM	36	4750	132	4000	1200	80	75	620	IP20	IK07	19	72,000
2069383	Pixier Recessed 625X625 HO 4P 4000K SSH01	37	4750	128	4000	1200	80	75	620	IP20	IK07	19	72,000
2069384	Pixier Recessed 625X625 HO 4P 4000K SSC01	37	4750	128	4000	1200	80	75	620	IP20	IK07	19	72,000
2069430	Pixier Recessed 625X625 4P TW DALI	32	3400	106	3000	950	80	76	620	IP20	IK07	19	72,000
2069431	Pixier Recessed 625X625 4P TW SSC01	32	3400	106	3000	950	80	76	620	IP20	IK07	19	72,000
1250 x 310													
2069416	Pixier Recessed 1250X310 HE 4P 4000K DALI	25	3700	148	4000	900	80	75	1245	IP20	IK02	19	72,000
2069417	Pixier Recessed 1250X310 HE 4P 4000K DALI CB EM	25	3700	148	4000	900	80	75	1245	IP20	IK02	19	72,000
2069418	Pixier Recessed 1250X310 HE 4P 4000K SSH01	26	3700	142	4000	900	80	75	1245	IP20	IK02	19	72,000
2069419	Pixier Recessed 1250X310 HE 4P 4000K SSC01	26	3700	142	4000	900	80	75	1245	IP20	IK02	19	72,000
2069420	Pixier Recessed 1250X310 HO 4P 4000K DALI	36	4700	131	4000	1200	80	75	1245	IP20	IK02	19	72,000
2069421	Pixier Recessed 1250X310 HO 4P 4000K DALI CB EM	36	4700	131	4000	1200	80	75	1245	IP20	IK02	19	72,000
2069422	Pixier Recessed 1250X310 HO 4P 4000K SSH01	37	4700	127	4000	1200	80	75	1245	IP20	IK02	19	72,000
2069423	Pixier Recessed 1250X310 HO 4P 4000K SSC01	37	4700	127	4000	1200	80	75	1245	IP20	IK02	19	72,000
2069434	Pixier Recessed 1250X310 4P TW DALI	32	3400	106	3000	950	80	76	1195	IP20	IK07	19	72,000
2069435	Pixier Recessed 1250X310 4P TW SSC01	32	3400	106	3000	950	80	76	1195	IP20	IK07	19	72,000
325 x 325													
2069340	Pixier Recessed 325X325 HO 1P 3000K DALI	12	1300	108	3000	350	80	76	320	IP20	IK07	19	72,000
2069341	Pixier Recessed 325X325 HO 1P 3000K SSC01	12	1300	108	3000	350	80	76	320	IP20	IK07	19	72,000
2069342	Pixier Recessed 325X325 HO 1P 4000K DALI	12	1350	113	4000	350	80	76	320	IP20	IK07	19	72,000
2069343	Pixier Recessed 325X325 HO 1P 4000K SSC01	12	1350	113	4000	350	80	76	320	IP20	IK07	19	72,000
2069344	Pixier Recessed 325X325 HO 1P 4000K DALI EMD	15	1350	90	4000	350	80	76	320	IP20	IK07	19	72,000
2069345	Pixier Recessed 325X325 HO 1P 4000K SSC01 EM	15	1350	90	4000	350	80	76	320	IP20	IK07	19	72,000

Accessories	
Code	Description
2069450	Pixier Surface Mounted Box Accessory 600X600
2069451	Pixier Surface Mounted Box Accessory 1200X300

Sylvania Optix Surface & Suspended

Product information

Product overview on page 18

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
Optix 1200 x 200mm module – Medium Output – 3000K - CRI80													
0045000	Optix Surface 1200x200 2 LINE 3000K ALU	26	3,400	131	3,000	500	80	45	1129	IP20	IK07	16	72,000
0045001	Optix Surface 1200x200 2 LINE 3000K WHITE	23	3,400	148	3,000	450	80	45	1129	IP20	IK07	19	72,000
0045002	Optix Surface 1200x200 2 LINE 3000K ALU DA	26	3,400	131	3,000	250	80	45	1129	IP20	IK07	16	72,000
0045003	Optix Surface 1200x200 2 LINE 3000K WHITE DA	23	3,400	148	3,000	250	80	45	1129	IP20	IK07	19	72,000
4000K - CRI80													
0045004	Optix Surface 1200x200 2 LINE 4000K ALU	26	3,600	138	4,000	500	80	45	1129	IP20	IK07	16	72,000
0045005	Optix Surface 1200x200 2 LINE 4000K WHITE	23	3,600	157	4,000	450	80	45	1129	IP20	IK07	19	72,000
0045006	Optix Surface 1200x200 2 LINE 4000K ALU DA	26	3,600	138	4,000	250	80	45	1129	IP20	IK07	16	72,000
0045007	Optix Surface 1200x200 2 LINE 4000K WHITE DA	23	3,600	157	4,000	225	80	45	1129	IP20	IK07	19	72,000
0044982	Optix Surface 1200x200 2 LINE 4000K ALU SSA01	27	3,600	133	4,000	250	80	45	1129	IP20	IK07	16	72,000
0044983	Optix Surface 1200x200 2 LINE 4000K WHITE SSA01	24	3,600	150	4,000	230	80	45	1129	IP20	IK07	19	72,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
0045010	Optix Surface 1200x200 2 LINE 4000K ALU SSC	27	3,600	133	4,000	250	80	45	1129	IP20	IK07	16	72,000
0045011	Optix Surface 1200x200 2 LINE 4000K WHITE SSC	24	3,600	150	4,000	225	80	45	1129	IP20	IK07	19	72,000
0045012	Optix Surface 1200x200 2 LINE 4000K ALU EM	29	3,600	124	4,000	500	80	45	1129	IP20	IK07	16	72,000
0045013	Optix Surface 1200x200 2 LINE 4000K WHITE EM	26	3,600	138	4,000	450	80	45	1129	IP20	IK07	19	72,000
0045014	Optix Surface 1200x200 2 LINE 4000K ALU DA EM	29	3,600	124	4,000	250	80	45	1129	IP20	IK07	16	72,000
0045015	Optix Surface 1200x200 2 LINE 4000K WHITE DA EM	26	3,600	138	4,000	225	80	45	1129	IP20	IK07	19	72,000
4000K - CRI90													
0045018	Optix Surface 1200x200 2 LINE 4000K C9 ALU DA	29	3,700	128	4,000	300	90	45	1129	IP20	IK07	16	72,000
0045019	Optix Surface 1200x200 2 LINE 4000K C9 WHITE DA	27	3,700	137	4,000	275	90	45	1129	IP20	IK07	19	72,000
0045020	Optix Surface 1200x200 2 LINE 4000K C9 ALU DA EM	32	3,700	116	4,000	300	90	45	1129	IP20	IK07	16	72,000
0045021	Optix Surface 1200x200 2 LINE 4000K C9 WHITE DA EM	30	3,700	123	4,000	275	90	45	1129	IP20	IK07	19	72,000
Optix 1200 x 200mm module – Medium Output Direct / Indirect – 3000K - CRI80													
0045030	Optix Surface 1200x200 2 LINE D/I 3000K ALU	29	4,000	138	3,000	600	80	45	1129	IP20	IK07	16	72,000
0045031	Optix Surface 1200x200 2 LINE D/I 3000K WHITE	29	4,000	138	3,000	500	80	45	1129	IP20	IK07	19	72,000
0045032	Optix Surface 1200x200 2 LINE D/I 3000K ALU DA	29	4,000	138	3,000	600	80	45	1129	IP20	IK07	16	72,000
0045033	Optix Surface 1200x200 2 LINE D/I 3000K WHITE DA	29	4,000	138	3,000	500	80	45	1129	IP20	IK07	19	72,000
4000K - CRI80													
0045034	Optix Surface 1200x200 2 LINE D/I 4000K ALU	29	4,100	141	4,000	550	80	45	1129	IP20	IK07	16	72,000
0045035	Optix Surface 1200x200 2 LINE D/I 4000K WHITE	25	4,100	164	4,000	500	80	45	1129	IP20	IK07	19	72,000
0045036	Optix Surface 1200x200 2 LINE D/I 4000K ALU DA	29	4,100	141	4,000	550	80	45	1129	IP20	IK07	16	72,000
0045037	Optix Surface 1200x200 2 LINE D/I 4000K WHITE DA	25	4,100	164	4,000	500	80	45	1129	IP20	IK07	19	72,000
0044984	Optix Surface 1200x200 2 LINE D/I 4000K ALU SSA01	30	4,100	137	4,000	180	80	45	1129	IP20	IK07	16	72,000
0044985	Optix Surface 1200x200 2 LINE D/I 4000K WHITE SSA01	26	4,100	158	4,000	170	80	45	1129	IP20	IK07	19	72,000
0045040	Optix Surface 1200x200 2 LINE D/I 4000K ALU SSC	30	4,100	137	4,000	550	80	45	1129	IP20	IK07	16	72,000
0045041	Optix Surface 1200x200 2 LINE D/I 4000K WHITE SSC	26	4,100	158	4,000	500	80	45	1129	IP20	IK07	19	72,000
0045042	Optix Surface 1200x200 2 LINE D/I 4000K ALU EM	32	4,100	128	4,000	550	80	45	1129	IP20	IK07	16	72,000
0045043	Optix Surface 1200x200 2 LINE D/I 4000K WHITE EM	28	4,100	146	4,000	500	80	45	1129	IP20	IK07	19	72,000
0045044	Optix Surface 1200x200 2 LINE D/I 4000K ALU DA EM	32	4,100	128	4,000	550	80	45	1129	IP20	IK07	16	72,000
0045045	Optix Surface 1200x200 2 LINE D/I 4000K WHITE DA EM	28	4,100	146	4,000	500	80	45	1129	IP20	IK07	19	72,000
4000K - CRI90													
0045048	Optix Surface 1200x200 2 LINE D/I 4000K C9 ALU DA	32	4,100	128	4,000	650	90	45	1129	IP20	IK07	16	72,000
0045049	Optix Surface 1200x200 2 LINE D/I 4000K C9 WHITE DA	29	4,100	141	4,000	600	90	45	1129	IP20	IK07	19	72,000
0045051	Optix Surface 1200x200 2 LINE D/I 4000K C9 ALU DA EM	35	4,100	117	4,000	650	90	45	1129	IP20	IK07	16	72,000
0045052	Optix Surface 1200x200 2 LINE D/I 4000K C9 WHITE DA EM	32	4,100	128	4,000	600	90	45	1129	IP20	IK07	19	72,000
Optix 1200 x 200mm module - High Output Direct / Indirect – 3000K - CRI80													
0045061	Optix Surface 1200x200 2 Lines D/I HO 3000K ALU	36	5,100	142	3,000	250	80	45	1129	IP20	IK07	16	72,000
0045062	Optix Surface 1200x200 2 Lines D/I HO 3000K WHITE	33	5,100	155	3,000	650	80	45	1129	IP20	IK07	19	72,000
0045063	Optix Surface 1200x200 2 Lines D/I HO 3000K ALU DA	36	5,100	142	3,000	750	80	45	1129	IP20	IK07	16	72,000
0045064	Optix Surface 1200x200 2 Lines D/I HO 3000K WHITE DA	33	5,100	155	3,000	650	80	45	1129	IP20	IK07	19	72,000
4000K - CRI80													
0045065	Optix Surface 1200x200 2 Lines D/I HO 4000K ALU	36	5,600	156	4,000	250	80	45	1129	IP20	IK07	16	72,000
0045066	Optix Surface 1200x200 2 Lines D/I HO 4000K WHITE	35	5,600	160	4,000	700	80	45	1129	IP20	IK07	19	72,000
0045067	Optix Surface 1200x200 2 Lines D/I HO 4000K ALU DA	36	5,600	156	4,000	750	80	45	1129	IP20	IK07	16	72,000
0045068	Optix Surface 1200x200 2 Lines D/I HO 4000K WHITE DA	35	5,600	160	4,000	700	80	45	1129	IP20	IK07	19	72,000
0044986	Optix Surface 1200x200 2 Lines D/I HO 4K ALU SSA01	37	5,600	151	4,000	250	80	45	1129	IP20	IK07	16	72,000
0044987	Optix Surface 1200x200 2 Lines D/I HO 4K WHITE SSA01	36	5,600	156	4,000	230	80	45	1129	IP20	IK07	19	72,000
0045071	Optix Surface 1200x200 2 Lines D/I HO 4000K ALU SSC	37	5,600	151	4,000	750	80	45	1129	IP20	IK07	16	72,000
0045072	Optix Surface 1200x200 2 Lines D/I HO 4000K WHITE SSC	36	5,600	156	4,000	700	80	45	1129	IP20	IK07	19	72,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
0045073	Optix Surface 1200x200 2 Lines D/I HO 4000K ALU EM	39	5,600	144	4,000	250	80	45	1129	IP20	IK07	16	72,000
0045074	Optix Surface 1200x200 2 Lines D/I HO 4000K WHITE EM	38	5,600	147	4,000	700	80	45	1129	IP20	IK07	19	72,000
0045075	Optix Surface 1200x200 2 Lines D/I HO 4000K ALU DA EM	39	5,600	144	4,000	750	80	45	1129	IP20	IK07	16	72,000
0045076	Optix Surface 1200x200 2 Lines D/I HO 4000K WHITE DA EM	38	5,600	147	4,000	700	80	45	1129	IP20	IK07	19	72,000
Optix 1500 x 200mm module – High Output Direct / Indirect – 4000K – CRI80													
0045098	Optix Surface 1500x200 2 Lines D/I HO 4000K ALU DA	45	7,000	156	4,000	950	80	45	1410	IP20	IK07	16	72,000
0045099	Optix Surface 1500x200 2 Lines D/I HO 4000K WHITE DA	44	7,000	159	4,000	850	80	45	1410	IP20	IK07	19	72,000
0044988	Optix Surface 1500x200 2 Lines D/I HO 4K ALU SSA01	46	7,000	152	4,000	350	80	45	1410	IP20	IK07	16	72,000
0044989	Optix Surface 1500x200 2 Lines D/I HO 4K WHITE SSA01	45	7,000	156	4,000	330	80	45	1410	IP20	IK07	19	72,000
0045102	Optix Surface 1500x200 2 Lines D/I HO 4000K ALU SSC	46	7,000	152	4,000	950	80	45	1410	IP20	IK07	16	72,000
0045103	Optix Surface 1500x200 2 Lines D/I HO 4000K WHITE SSC	45	7,000	156	4,000	850	80	45	1410	IP20	IK07	19	72,000
0045104	Optix Surface 1500x200 2 Lines D/I HO 4000K ALU EM	48	7,000	146	4,000	950	80	45	1410	IP20	IK07	16	72,000
0045105	Optix Surface 1500x200 2 Lines D/I HO 4000K WHITE EM	47	7,000	149	4,000	850	80	45	1410	IP20	IK07	19	72,000
0045106	Optix Surface 1500x200 2 Lines D/I HO 4000K ALU DA EM	48	7,000	146	4,000	950	80	45	1410	IP20	IK07	16	72,000
0045107	Optix Surface 1500x200 2 Lines D/I HO 4000K WHITE DA EM	47	7,000	149	4,000	850	80	45	1410	IP20	IK07	19	72,000

Accessories	
Code	Description
Mechanical accessories	
0044261	Optix Surface Plastic Joining Kit
5054686	Universal Suspension Kit 1.5M
Suspension with electrical connections	
5050568	Rana ACC Suspension + Power + 3Core Set 1w
5050571	Rana ACC Suspension + Power + 5Core Set 2w
5050574	Rana ACC Suspension + Power + 3Core Set 1t
5050577	Rana ACC Suspension + Power + 5Core Set 1t
5050604	Rana ACC Ceiling Rose
Through wiring accessories	
0044255	Optix Linear ACC Through Wire 3X1,5mm2
0044256	Optix Linear ACC Through Wire 4X1,5mm2
0044257	Optix Linear ACC Through Wire 3X1,5+2X0,5mm2
0044258	Optix Linear ACC Through Wire 2X0,5+2X0,5mm2
Sylvania Optix Surface & Suspended Accessories	
Code	Description
0044265	Optix Linear ACC Through Wire 3X1,5 1500mm
0044266	Optix Linear ACC Through Wire 4X1,5 1500mm
0044267	Optix Linear ACC Through Wire 3X1,5+2X0,5 1500mm
0044268	Optix Linear ACC Through Wire 2X0,5+2X0,5 1500mm
Infill panel	
0045113	Optix Surface 2L Infill 600mm
0045114	Optix Surface 2L Infill 900mm
0045115	Optix Surface 2L Infill 1200mm
0045116	Optix Surface 2L Infill 1500mm

Sylvania Optix Linear Surface

Product information

Product overview on page 19

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	IK rating	UGR	Lifetime (hours)
Optix 1200 x 90mm Surface module – 3000K – CRI80													
0045517	Optix Linear Surface 1200 3K ALU	27	3,200	119	4,000	500	80	80	1,129	20	07	19	72,000
0045518	Optix Linear Surface 1200 3K ALU DA	27	3,200	119	4,000	250	80	80	1,129	20	07	19	72,000
4000K - CRI80													
0045519	Optix Linear Surface 1200 4K ALU	26	3,400	131	4,000	500	80	80	1,129	20	07	19	72,000
0045520	Optix Linear Surface 1200 4K ALU DA	26	3,400	131	4,000	250	80	80	1,129	20	07	19	72,000
0044962	Optix Linear Surface 1200 4K ALU SSA01	27	3,400	126	4,000	250	80	80	1,165	20	07	19	72,000
0045522	Optix Linear Surface 1200 4K ALU SSC	27	3,400	126	4,000	250	80	80	1,129	20	07	19	72,000
0045523	Optix Linear Surface 1200 4K ALU EM	29	3,400	117	4,000	500	80	80	1,160	20	07	19	72,000
0045524	Optix Linear Surface 1200 4K ALU DA EM	29	3,400	117	4,000	250	80	80	1,160	20	07	19	72,000
0045526	Optix Linear Surface 1200 4K ALU SSC EM	30	3,400	113	4,000	250	80	80	1,160	20	07	19	72,000
4000K - CRI90													
0045527	Optix Linear Surface 1200 4K C9 ALU DA	27	3,100	115	4,000	275	90	80	1,129	20	07	19	72,000
0045528	Optix Linear Surface 1200 4K C9 ALU DA EM	30	3,100	103	4,000	275	90	80	1,160	20	07	19	72,000
TW - CRI80													
0045529	Optix Linear Surface 1200 TW ALU DA	21	2,200	105	3,000-6,000	400	80	80	1,129	20	07	16	72,000
0045530	Optix Linear Surface 1200 TW ALU SSC	22	2,200	100	3,000-6,000	400	80	80	1,129	20	07	16	72,000
0045531	Optix Linear Surface 1200 TW ALU DA EM	24	2,200	92	3,000-6,000	400	80	80	1,160	20	07	16	72,000
0045532	Optix Linear Surface 1200 TW ALU SSC EM	25	2,200	88	3,000-6,000	400	80	80	1,160	20	07	16	72,000
Optix 1200 x 90mm suspended module direct / indirect – 3000K - CRI80													
0045533	Optix Linear Surface 1200 D/I 3K ALU	31	4,200	135	4,000	600	80	80	1,129	20	07	16	72,000
0045534	Optix Linear Surface 1200 D/I 3K ALU DA	31	4,200	135	4,000	200	80	80	1,129	20	07	16	72,000
4000K - CRI80													
0045535	Optix Linear Surface 1200 D/I 4K ALU	31	4,500	145	4,000	600	80	80	1,129	20	07	16	72,000
0045536	Optix Linear Surface 1200 D/I 4K ALU DA	31	4,500	145	4,000	200	80	80	1,129	20	07	16	72,000
0044964	Optix Linear Surface 1200 D/I 4K ALU SSA01	32	3,400	141	4,000	200	80	80	1,165	20	07	16	72,000
0045538	Optix Linear Surface 1200 D/I 4K ALU SSC	32	4,500	141	4,000	200	80	80	1,129	20	07	16	72,000
0045539	Optix Linear Surface 1200 D/I 4K ALU EM	34	4,500	132	4,000	600	80	80	1,160	20	07	16	72,000
0045540	Optix Linear Surface 1200 D/I 4K ALU DA EM	34	4,500	132	4,000	200	80	80	1,160	20	07	16	72,000
0045542	Optix Linear Surface 1200 D/I 4K ALU SSC EM	35	4,500	129	4,000	200	80	80	1,160	20	07	16	72,000
4000K - CRI90													
0045543	Optix Linear Surface 1200 D/I 4K C9 ALU DA	33	4,100	124	4,000	225	90	80	1,129	20	07	16	72,000
0045544	Optix Linear Surface 1200 D/I 4K C9 ALU DA EM	36	4,100	114	4,000	225	90	80	1,160	20	07	16	72,000
TW - CRI80													
0045545	Optix Linear Surface 1200 D/I TW ALU DA	31	3,700	119	3,000-6,000	600	80	80	1,129	20	07	16	72,000
0045546	Optix Linear Surface 1200 D/I TW ALU SSC	32	3,700	116	3,000-6,000	600	80	80	1,129	20	07	16	72,000
0045547	Optix Linear Surface 1200 D/I TW ALU DA EM	34	3,700	109	3,000-6,000	600	80	80	1,160	20	07	16	72,000
0045548	Optix Linear Surface 1200 D/I TW ALU SSC EM	35	3,700	106	3,000-6,000	600	80	80	1,160	20	07	16	72,000

Accessories on the next page

Optix Linear Surface & Suspended – Accessories	
Code	Description
Mechanical Accessories	
0044260	Optix Linear Surface ACC Joining Kit
5054686	Universal Suspension Kit
Suspension with Electrical Connections	
5050568	Rana ACC Suspension + Power + 3Core Set 1w
5050571	Rana ACC Suspension + Power + 5Core Set 2w
5050574	Rana ACC Suspension + Power + 3Core Set 1t
5050577	Rana ACC Suspension + Power + 5Core Set 1t
5050604	RANA ACC Ceiling Rose
Through Wiring Accessories	
0044255	Optix Linear ACC Through Wire 3X1,5mm2
0044256	Optix Linear ACC Through Wire 4X1,5mm2
0044257	Optix Linear ACC Through Wire 3X1,5+2X0,5mm2
0044258	Optix Linear ACC Through Wire 2X0,5+2X0,5mm2
Infill Panels	
0045595	Optix Linear Surface Infill 600mm
0045596	Optix Linear Surface Infill 900mm
0045597	Optix Linear Surface Infill 1200mm

Sylvania Optix MPO

Product information

Product overview on page 20

Code	DescRecessed	ip	tion	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Height (mm)	Length (mm)	CRI	UGR	IP rating	IK rating	Lifetime (hours)
Optix MPO - Direct – Surfacetandard Output															
0044083	Optix Surface 1200 MPO D 4K CC WHITE	23		2,863	124	4,000	225	50	1,200	80	19	IP20	IK07	60,000	
0044084	Optix Surface 1200 MPO D 4K EM WHITE	26		2,863	110	4,000	225	50	1,200	80	19	IP20	IK07	60,000	
0044085	Optix Surface 1200 MPO D 4K DA WHITE	24		2,863	119	4,000	225	50	1,200	80	19	IP20	IK07	60,000	
0044086	Optix Surface 1200 MPO D 4K D+EM WHITE	26		2,863	110	4,000	225	50	1,200	80	19	IP20	IK07	60,000	
High Output															
0044075	Optix Surface 1200 MPO D HO 4K CC WHITE	30		3,550	118	4,000	300	50	1,200	80	20	IP20	IK07	60,000	
0044076	Optix Surface 1200 MPO D HO 4K EM WHITE	33		3,550	107	4,000	300	50	1,200	80	20	IP20	IK07	60,000	
0044077	Optix Surface 1200 MPO D HO 4K DA WHITE	31		3,550	114	4,000	300	50	1,200	80	20	IP20	IK07	60,000	
0044078	Optix Surface 1200 MPO D HO 4K D+EM WHITE	33		3,550	107	4,000	300	50	1,200	80	20	IP20	IK07	60,000	
Optix MPO - Direct/Indirect – Surfacetandard Output															
0044079	Optix Surface 1200 MPO D/I 4K CC WHITE	36		4,900	136	4,000	250	50	1,200	80	17	IP20	IK07	60,000	
0044080	Optix Surface 1200 MPO D/I 4K EM WHITE	39		4,900	125	4,000	250	50	1,200	80	17	IP20	IK07	60,000	
0044081	Optix Surface 1200 MPO D/I 4K DA WHITE	37		4,900	132	4,000	250	50	1,200	80	17	IP20	IK07	60,000	
0044082	Optix Surface 1200 MPO D/I 4K D+EM WHITE	39		4,900	125	4,000	250	50	1,200	80	17	IP20	IK07	60,000	
High Output															
0044071	Optix Surface 1200 MPO D/I HO 4K CC WHITE	44		5,770	131	4,000	300	50	1,200	80	18	IP20	IK07	60,000	
0044072	Optix Surface 1200 MPO D/I HO 4K EM WHITE	47		5,770	122	4,000	300	50	1,200	80	18	IP20	IK07	60,000	
0044073	Optix Surface 1200 MPO D/I HO 4K DA WHITE	45		5,770	128	4,000	300	50	1,200	80	18	IP20	IK07	60,000	
0044074	Optix Surface 1200 MPO D/I HO 4K D+EM WHITE	47		5,770	122	4,000	300	50	1,200	80	18	IP20	IK07	60,000	
Accessories															
Code	Description														
5054686	UNIVERSAL SUSPENSION KIT 1.5M														

Sylvania Optix 4 Cells

Product information

Product overview on page 21

Code	DescRecessed	ip	tion	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Height (mm)	Length (mm)	CRI	UGR	IP rating	IK rating	Lifetime (hours)	Dimmable
Optix Recessedeceased 310x100mm – 3000K - CRI80																
0044304	Optix Recessed 4 Cells 3K WH CC	9		1,059	118	3,000	150	45	310	>80	<22	IP20	IK07	72,000	No	
0044305	Optix Recessed 4 Cells 3K AL CC	9		962	107	3,000	150	45	310	>80	<18	IP20	IK07	72,000	No	
0044306	Optix Recessed 4 Cells 3K WH DALI	9		1,059	118	3,000	150	45	310	>80	<22	IP20	IK07	72,000	Yes	
0044307	Optix Recessed 4 Cells 3K AL DALI	9		962	107	3,000	150	45	310	>80	<18	IP20	IK07	72,000	Yes	
4000K - CRI80																
0044300	Optix Recessed 4 Cells 4K WH CC	9		1,098	122	4,000	150	45	310	>80	<22	IP20	IK07	72,000	No	
0044301	Optix Recessed 4 Cells 4K AL CC	9		1,010	112	4,000	150	45	310	>80	<18	IP20	IK07	72,000	No	
0044302	Optix Recessed 4 Cells 4K WH DALI	9		1,098	122	4,000	150	45	310	>80	<22	IP20	IK07	72,000	Yes	
0044303	Optix Recessed 4 Cells 4K AL DALI	9		1,010	112	4,000	150	45	310	>80	<18	IP20	IK07	72,000	Yes	

Concord Curvelyte

Product information

Product overview on page 22

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Height (mm)	Length (mm)	IP rating	IK rating	Lifetime (hours)
3000K											
2093175	Curvelyte 1265x330 HO D/I 3K DALI BLACK	55	6250	114	3000	1200	46	1265	IP20	IK06	50,000
2093180	Curvelyte 1265x330 HO D/I 3K DALI WHITE	55	6600	120	3000	1200	46	1265	IP20	IK06	50,000
2093186	Curvelyte 1265x330 HO LG D/I 3K DALI BLACK	55	5000	91	3000	1200	46	1265	IP20	IK06	50,000
2093188	Curvelyte 1265x330 HO LG D/I 3K DALI WHITE	55	5300	96	3000	1200	46	1265	IP20	IK06	50,000
4000K											
2093176	Curvelyte 1265x330 HO D/I 4K DALI BLACK	55	6750	123	4000	1200	46	1265	IP20	IK06	50,000
2093181	Curvelyte 1265x330 HO D/I 4K DALI WHITE	55	7200	131	4000	1200	46	1265	IP20	IK06	50,000
2093187	Curvelyte 1265x330 HO LG D/I 4K DALI BLACK	55	5450	99	4000	1200	46	1265	IP20	IK06	50,000
2093189	Curvelyte 1265x330 HO LG D/I 4K DALI WHITE	55	5800	105	4000	1200	46	1265	IP20	IK06	50,000

Accessories	
Code	Description
2093168	Curvelyte Box 1 CYLIN 1 RECTAN SM SILVER
2093169	Curvelyte Box 1 CYLIN 1 RECTAN SM WHITE
2093170	Curvelyte Box 2 RECTAN SM SILVER
2093171	Curvelyte Box 2 RECTAN SM WHITE
2093177	Curvelyte Box 1 CYLIN 1 RECTAN SM BLACK
2093178	Curvelyte Box 2 RECTAN SM BLACK

Concord Colossal

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Height (mm)	Length (mm)	IP rating	IK rating	Lifetime (hours)
3000K											
4061100	Colossal 400 3400LM 830 WHT	30	3400	113	3000	333	87	400	IP40	IK03	50,000
4061102	Colossal 400 3400LM 830 EM3 WHT	30	3400	113	3000	333	87	400	IP40	IK03	50,000
4061104	Colossal 400 3400LM 830 DALI WHT	30	3400	113	3000	333	87	400	IP40	IK03	50,000
4061106	Colossal 400 3400LM 830 DALI EM3 WHT	30	3400	113	3000	333	87	400	IP40	IK03	50,000
4000K											
4061101	Colossal 400 3550LM 840 WHT	30	3550	118	4000	333	87	400	IP40	IK03	50,000
4061103	Colossal 400 3550LM 840 EM3 WHT	30	3550	118	4000	333	87	400	IP40	IK03	50,000
4061105	Colossal 400 3550LM 840 DALI WHT	30	3550	118	4000	333	87	400	IP40	IK03	50,000
4061107	Colossal 400 3550LM 840 DALI EM3 WHT	30	3550	118	4000	333	87	400	IP40	IK03	50,000

Accessories	
Code	Description
4061178	Colossal WIRE Suspension Kit 2000mm
4061179	Colossal WIRE Suspension Kit 2000mm DALI
4192746	Colossal WIRE Suspension Kit 4000mm

Concord Myriad Pendant

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Beam Angle (°)	IP rating	IK rating	Lifetime (hours)
Surface Mounted – 2700K										
2058982	Myriad Pendant 2700K Surface MTD PHASE DIM WHITE	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058983	Myriad Pendant 2700K Surface MTD DALI WHITE	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058986	Myriad Pendant 2700K Surface MTD PHASE DIM BLACK	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058987	Myriad Pendant 2700K Surface MTD DALI BLACK	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058978	Myriad Pendant 2700K Surface MTD PHASE DIM SILVER	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058979	Myriad Pendant 2700K Surface MTD DALI SILVER	10	975	97.5	2700	250	30	IP20	IK02	50,000
3000K										
2049549	Myriad Pendant 3000K Surface MTD PHASE DIM WHITE	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049555	Myriad Pendant 3000K Surface MTD DALI WHITE	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049579	Myriad Pendant 3000K Surface MTD PHASE DIM BLACK	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049582	Myriad Pendant 3000K Surface MTD DALI BLACK	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049550	Myriad Pendant 3000K Surface MTD PHASE DIM SILVER	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049556	Myriad Pendant 3000K Surface MTD DALI SILVER	10	1114	111.4	3000	250	30	IP20	IK02	50,000
4000K										
2049551	Myriad Pendant 4000K Surface MTD PHASE DIM WHITE	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049557	Myriad Pendant 4000K Surface MTD DALI WHITE	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049580	Myriad Pendant 4000K Surface MTD PHASE DIM BLACK	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049583	Myriad Pendant 4000K Surface MTD DALI BLACK	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049552	Myriad Pendant 4000K Surface MTD PHASE DIM SILVER	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049558	Myriad Pendant 4000K Surface MTD DALI SILVER	10	1093	109.3	4000	250	30	IP20	IK02	50,000
Remote Gear – 2700K										
2058980	Myriad Pendant 2700K Remote Gear PHASE DIM WHITE	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058981	Myriad Pendant 2700K Remote Gear DALI WHITE	10	975	97.5	2700	250	30	IP20	IK02	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Beam Angle (°)	IP rating	IK rating	Lifetime (hours)
2058984	Myriad Pendant 2700K Remote Gear PHASE DIM BLACK	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058985	Myriad Pendant 2700K Remote Gear DALI BLACK	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058976	Myriad Pendant 2700K Remote Gear PHASE DIM SILVER	10	975	97.5	2700	250	30	IP20	IK02	50,000
2058977	Myriad Pendant 2700K Remote Gear DALI SILVER	10	975	97.5	2700	250	30	IP20	IK02	50,000
3000K										
2049585	Myriad Pendant 3000K Remote Gear PHASE DIM WHITE	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049591	Myriad Pendant 3000K Remote Gear DALI WHITE	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049597	Myriad Pendant 3000K Remote Gear PHASE DIM BLACK	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049600	Myriad Pendant 3000K Remote Gear DALI BLACK	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049586	Myriad Pendant 3000K Remote Gear PHASE DIM SILVER	10	1114	111.4	3000	250	30	IP20	IK02	50,000
2049592	Myriad Pendant 3000K Remote Gear DALI SILVER	10	1114	111.4	3000	250	30	IP20	IK02	50,000
4000K										
2049587	Myriad Pendant 4000K Remote Gear PHASE DIM WHITE	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049593	Myriad Pendant 4000K Remote Gear DALI WHITE	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049598	Myriad Pendant 4000K Remote Gear PHASE DIM BLACK	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049601	Myriad Pendant 4000K Remote Gear DALI BLACK	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049588	Myriad Pendant 4000K Remote Gear PHASE DIM SILVER	10	1093	109.3	4000	250	30	IP20	IK02	50,000
2049594	Myriad Pendant 4000K Remote Gear DALI SILVER	10	1093	109.3	4000	250	30	IP20	IK02	50,000

Concord TubiXx

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Beam Angle (°)	IP rating	IK rating	Lifetime (hours)
Pendant – 2700K										
2061000	TubiXx LED pendant 2700K black-gold	14	1152	82	2700	350	33.8	IP20	IK02	50,000
2061003	TubiXx LED pendant 2700K white-black	14	1138	81	2700	350	35.8	IP20	IK02	50,000
2061006	TubiXx LED pendant 2700K white-white	14	1152	82	2700	350	34.5	IP20	IK02	50,000
3000K										
2061001	TubiXx LED pendant 3000K black-gold	14	1234	88	3000	350	35.9	IP20	IK02	50,000
2061004	TubiXx LED pendant 3000K white-black	14	1243	89	3000	350	36.5	IP20	IK02	50,000
2061007	TubiXx LED pendant 3000K white-white	14	1267	91	3000	350	34.2	IP20	IK02	50,000
4000K										
2061002	TubiXx LED pendant 4000K black-gold	14	1361	97	4000	350	35.2	IP20	IK02	50,000
2061005	TubiXx LED pendant 4000K white-black	14	1337	96	4000	350	36.5	IP20	IK02	50,000
2061008	TubiXx LED pendant 4000K white-white	14	1327	95	4000	350	34.9	IP20	IK02	50,000
Surface – 2700K										
2061009	TubiXx LED surface 2700K black-gold	14	1152	82	2700	350	33.8	IP20	IK02	50,000
2061012	TubiXx LED surface 2700K white-black	14	1138	81	2700	350	35.8	IP20	IK02	50,000
2061015	TubiXx LED surface 2700K white-white	14	1152	82	2700	350	34.5	IP20	IK02	50,000
3000K										
2061010	TubiXx LED surface 3000K black-gold	14	1234	88	3000	350	35.9	IP20	IK02	50,000
2061013	TubiXx LED surface 3000K white-black	14	1243	89	3000	350	36.5	IP20	IK02	50,000
2061014	TubiXx LED surface 4000K white-black	14	1337	96	4000	350	36.5	IP20	IK02	50,000
4000K										
2061011	TubiXx LED surface 4000K black-gold	14	1361	97	4000	350	35.2	IP20	IK02	50,000
2061016	TubiXx LED surface 3000K white-white	14	1267	91	3000	350	34.2	IP20	IK02	50,000
2061017	TubiXx LED surface 4000K white-white	14	1327	95	4000	350	34.9	IP20	IK02	50,000

Concord Ascent 50

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Diameter (mm)	Cut-out (mm)	IP rating	IK rating	Lifetime (hours)
2053870	Ascent50 Round 1700lm STD 3K	14	1732	124	3000	350	150	130	IP23	IK02	50,000
2053871	Ascent50 Round 1700lm STD 3K E3	16	1732	108	3000	350	150	130	IP23	IK02	50,000
2053872	Ascent50 Round 1700lm DALI 3K	14	1732	124	3000	350	150	130	IP23	IK02	50,000
2053873	Ascent50 Round 1700lm DALI 3K E3	16	1732	108	3000	350	150	130	IP23	IK02	50,000
2053874	Ascent50 Round 1700lm STD 4K	14	1705	122	4000	350	150	130	IP23	IK02	50,000
2053875	Ascent50 Round 1700lm STD 4K E3	16	1705	107	4000	350	150	130	IP23	IK02	50,000
2053876	Ascent50 Round 1700lm DALI 4K	14	1705	122	4000	350	150	130	IP23	IK02	50,000
2053877	Ascent50 Round 1700lm DALI 4K E3	16	1705	107	4000	350	150	130	IP23	IK02	50,000

Product overview on page 26

Concord Ascent 100

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Diameter (mm)	Cut-out (mm)	IP rating	IK rating	Lifetime (hours)
Architectural – 3000K											
2060500	Ascent 100 II ARCH 650 3K STD 120	5	638	128	3000	100	120	137	IP40/20	IK02	50,000
2060501	Ascent 100 II ARCH 650 3K STD EMG 120	7	638	91	3000	100	120	137	IP40/20	IK02	50,000
2060502	Ascent 100 II ARCH 650 3K DALI 120	5	638	128	3000	350	120	137	IP40/20	IK02	50,000
2060503	Ascent 100 II ARCH 650 3K DALI EMG 120	7	638	91	3000	350	120	137	IP40/20	IK02	50,000
2060510	Ascent 100 II ARCH 900 3K STD 120	8	900	113	3000	150	120	137	IP40/20	IK02	50,000
2060511	Ascent 100 II ARCH 900 3K STD EMG 120	10	900	90	3000	150	120	137	IP40/20	IK02	50,000
2060512	Ascent 100 II ARCH 900 3K DALI 120	8	900	113	3000	150	120	137	IP40/20	IK02	50,000
2060513	Ascent 100 II ARCH 900 3K DALI EMG 120	10	900	90	3000	150	120	137	IP40/20	IK02	50,000
2060520	Ascent 100 II ARCH 1200 3K STD 120	10	1160	116	3000	200	120	137	IP40/20	IK02	50,000
2060521	Ascent 100 II ARCH 1200 3K STD EMG 120	12	1160	97	3000	200	120	137	IP40/20	IK02	50,000
2060522	Ascent 100 II ARCH 1200 3K DALI 120	10	1160	116	3000	700	120	137	IP40/20	IK02	50,000
2060523	Ascent 100 II ARCH 1200 3K DALI EMG 120	12	1160	97	3000	700	120	137	IP40/20	IK02	50,000
2060530	Ascent 100 II ARCH 1900 3K STD 120	18	1887	105	3000	1200	120	137	IP40/20	IK02	50,000
2060531	Ascent 100 II ARCH 1900 3K STD EMG 120	20	1887	94	3000	1200	120	137	IP40/20	IK02	50,000
2060532	Ascent 100 II ARCH 1900 3K DALI 120	18	1887	105	3000	1200	120	137	IP40/20	IK02	50,000
2060533	Ascent 100 II ARCH 1900 3K DALI EMG 120	20	1887	94	3000	1200	120	137	IP40/20	IK02	50,000
2060540	Ascent 100 II ARCH 1000 3K STD 160	7	968	138	3000	150	160	178	IP40/20	IK02	50,000
2060541	Ascent 100 II ARCH 1000 3K STD EMG 160	9	968	108	3000	150	160	178	IP40/20	IK02	50,000
2060542	Ascent 100 II ARCH 1000 3K DALI 160	7	968	138	3000	350	160	178	IP40/20	IK02	50,000
2060543	Ascent 100 II ARCH 1000 3K DALI EMG 160	9	968	108	3000	350	160	178	IP40/20	IK02	50,000
2060550	Ascent 100 II ARCH 1900 3K STD 160	17	1847	109	3000	300	160	178	IP40/20	IK02	50,000
2060551	Ascent 100 II ARCH 1900 3K STD EMG 160	19	1847	97	3000	300	160	178	IP40/20	IK02	50,000
2060552	Ascent 100 II ARCH 1900 3K DALI 160	17	1847	109	3000	700	160	178	IP40/20	IK02	50,000
2060560	Ascent 100 II ARCH 2700 3K STD 160	21	2649	126	3000	1000	160	178	IP40/20	IK02	50,000
2060561	Ascent 100 II ARCH 2700 3K STD EMG 160	23	2649	115	3000	1000	160	178	IP40/20	IK02	50,000
2060562	Ascent 100 II ARCH 2700 3K DALI 160	21	2649	126	3000	400	160	178	IP40/20	IK02	50,000
2060563	Ascent 100 II ARCH 2700 3K DALI EMG 160	23	2649	115	3000	400	160	178	IP40/20	IK02	50,000
2060570	Ascent 100 II ARCH 3600 3K STD 160	30	3548	118	3000	1400	160	178	IP40/20	IK02	50,000
2060571	Ascent 100 II ARCH 3600 3K STD EMG 160	32	3548	111	3000	1400	160	178	IP40/20	IK02	50,000
2060572	Ascent 100 II ARCH 3600 3K DALI 160	30	3548	118	3000	1400	160	178	IP40/20	IK02	50,000
2060573	Ascent 100 II ARCH 3600 3K DALI EMG 160	32	3548	111	3000	1400	160	178	IP40/20	IK02	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Diameter (mm)	Cut-out (mm)	IP rating	IK rating	Lifetime (hours)
2698922	Ascent 100 II ARCH 3600 3K DALI 160	30	3548	118	3000	1400	160	178	IP40/20	IK02	50,000
Architectural – 4000K											
2060505	Ascent 100 II ARCH 650 4K STD 120	5	653	131	4000	100	120	137	IP40/20	IK02	50,000
2060506	Ascent 100 II ARCH 650 4K STD EMG 120	7	653	93	4000	100	120	137	IP40/20	IK02	50,000
2060507	Ascent 100 II ARCH 650 4K DALI 120	5	653	131	4000	350	120	137	IP40/20	IK02	50,000
2060508	Ascent 100 II ARCH 650 4K DALI EMG 120	7	653	93	4000	350	120	137	IP40/20	IK02	50,000
2060515	Ascent 100 II ARCH 900 4K STD 120	8	931	116	4000	150	120	137	IP40/20	IK02	50,000
2060516	Ascent 100 II ARCH 900 4K STD EMG 120	10	931	93	4000	150	120	137	IP40/20	IK02	50,000
2060517	Ascent 100 II ARCH 900 4K DALI 120	8	931	116	4000	150	120	137	IP40/20	IK02	50,000
2060518	Ascent 100 II ARCH 900 4K DALI EMG 120	10	931	93	4000	150	120	137	IP40/20	IK02	50,000
2060525	Ascent 100 II ARCH 1200 4K STD 120	10	1228	123	4000	200	120	137	IP40/20	IK02	50,000
2060526	Ascent 100 II ARCH 1200 4K STD EMG 120	12	1228	102	4000	200	120	137	IP40/20	IK02	50,000
2060527	Ascent 100 II ARCH 1200 4K DALI 120	10	1228	123	4000	700	120	137	IP40/20	IK02	50,000
2060528	Ascent 100 II ARCH 1200 4K DALI EMG 120	12	1228	102	4000	700	120	137	IP40/20	IK02	50,000
2060535	Ascent 100 II ARCH 2000 4K STD 120	18	2029	113	4000	1200	120	137	IP40/20	IK02	50,000
2060536	Ascent 100 II ARCH 2000 4K STD EMG 120	20	2029	101	4000	1200	120	137	IP40/20	IK02	50,000
2060537	Ascent 100 II ARCH 2000 4K DALI 120	18	2029	113	4000	1200	120	137	IP40/20	IK02	50,000
2060538	Ascent 100 II ARCH 2000 4K DALI EMG 120	20	2029	101	4000	1200	120	137	IP40/20	IK02	50,000
2059129	Ascent 100 II ARCHITECTURAL HO 4000K 160 Sylsmart SSC	17	1921	113	4000	700	160	178	IP40/20	IK02	50,000
2060545	Ascent 100 II ARCH 1000 4K STD 160	7	1009	144	4000	150	160	178	IP40/20	IK02	50,000
2060546	Ascent 100 II ARCH 1000 4K STD EMG 160	9	1009	112	4000	150	160	178	IP40/20	IK02	50,000
2060547	Ascent 100 II ARCH 1000 4K DALI 160	7	1009	144	4000	350	160	178	IP40/20	IK02	50,000
2060548	Ascent 100 II ARCH 1000 4K DALI EMG 160	9	1009	112	4000	350	160	178	IP40/20	IK02	50,000
2060555	Ascent 100 II ARCH 1900 4K STD 160	17	1921	113	4000	300	160	178	IP40/20	IK02	50,000
2060556	Ascent 100 II ARCH 1900 4K STD EMG 160	19	1921	101	4000	300	160	178	IP40/20	IK02	50,000
2060557	Ascent 100 II ARCH 1900 4K DALI 160	17	1921	113	4000	700	160	178	IP40/20	IK02	50,000
2060558	Ascent 100 II ARCH 1900 4K DALI EMG 160	19	1921	101	4000	700	160	178	IP40/20	IK02	50,000
2060565	Ascent 100 II ARCH 2700 4K STD 160	21	2767	132	4000	1000	160	178	IP40/20	IK02	50,000
2060566	Ascent 100 II ARCH 2700 4K STD EMG 160	23	2767	120	4000	1000	160	178	IP40/20	IK02	50,000
2060567	Ascent 100 II ARCH 2700 4K DALI 160	21	2767	132	4000	400	160	178	IP40/20	IK02	50,000
2060568	Ascent 100 II ARCH 2700 4K DALI EMG 160	23	2767	120	4000	400	160	178	IP40/20	IK02	50,000
2060575	Ascent 100 II ARCH 3700 4K STD 160	30	3766	126	4000	1400	160	178	IP40/20	IK02	50,000
2060576	Ascent 100 II ARCH 3700 4K STD EMG 160	32	3766	118	4000	1400	160	178	IP40/20	IK02	50,000
2060577	Ascent 100 II ARCH 3700 4K DALI 160	30	3766	126	4000	1400	160	178	IP40/20	IK02	50,000
2060578	Ascent 100 II ARCH 3700 4K DALI EMG 160	32	3766	118	4000	1400	160	178	IP40/20	IK02	50,000
Decorational – 3000K											
2060600	Ascent 100 II DECO 650 3K STD 120	5	638	128	3000	100	120	137	IP40/20	IK02	50,000
2060601	Ascent 100 II DECO 650 3K STD EMG 120	7	638	91	3000	100	120	137	IP40/20	IK02	50,000
2060602	Ascent 100 II DECO 650 3K DALI 120	5	638	128	3000	350	120	137	IP40/20	IK02	50,000
2060603	Ascent 100 II DECO 650 3K DALI EMG 120	7	638	91	3000	350	120	137	IP40/20	IK02	50,000
2060610	Ascent 100 II DECO 900 3K STD 120	8	900	113	3000	150	120	137	IP40/20	IK02	50,000
2060611	Ascent 100 II DECO 900 3K STD EMG 120	10	900	90	3000	150	120	137	IP40/20	IK02	50,000
2060612	Ascent 100 II DECO 900 3K DALI 120	8	900	113	3000	150	120	137	IP40/20	IK02	50,000
2060613	Ascent 100 II DECO 900 3K DALI EMG 120	10	900	90	3000	150	120	137	IP40/20	IK02	50,000
2060620	Ascent 100 II DECO 1200 3K STD 120	10	1160	116	3000	200	120	137	IP40/20	IK02	50,000
2060621	Ascent 100 II DECO 1200 3K STD EMG 120	12	1160	97	3000	200	120	137	IP40/20	IK02	50,000
2060622	Ascent 100 II DECO 1200 3K DALI 120	10	1160	116	3000	700	120	137	IP40/20	IK02	50,000
2060630	Ascent 100 II DECO 1000 3K STD 160	7	968	138	3000	150	160	178	IP40/20	IK02	50,000
2060631	Ascent 100 II DECO 1000 3K STD EMG 160	9	968	108	3000	150	160	178	IP40/20	IK02	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Diameter (mm)	Cut-out (mm)	IP rating	IK rating	Lifetime (hours)
2060632	Ascent 100 II DECO 1000 3K DALI 160	7	968	138	3000	350	160	178	IP40/20	IK02	50,000
2060633	Ascent 100 II DECO 1000 3K DALI EMG 160	9	968	108	3000	350	160	178	IP40/20	IK02	50,000
2060640	Ascent 100 II DECO 1900 3K STD 160	17	1847	109	3000	300	160	178	IP40/20	IK02	50,000
2060641	Ascent 100 II DECO 1900 3K STD EMG 160	19	1847	97	3000	300	160	178	IP40/20	IK02	50,000
2060642	Ascent 100 II DECO 1900 3K DALI 160	17	1847	109	3000	700	160	178	IP40/20	IK02	50,000
2060643	Ascent 100 II DECO 1900 3K DALI EMG 160	19	1847	97	3000	700	160	178	IP40/20	IK02	50,000
2060650	Ascent 100 II DECO 2700 3K STD 160	21	2649	126	3000	1000	160	178	IP40/20	IK02	50,000
2060651	Ascent 100 II DECO 2700 3K STD EMG 160	23	2649	115	3000	1000	160	178	IP40/20	IK02	50,000
2060652	Ascent 100 II DECO 2700 3K DALI 160	21	2649	126	3000	400	160	178	IP40/20	IK02	50,000
Decorational – 4000K											
2060605	Ascent 100 II DECO 650 4K STD 120	5	653	131	4000	100	120	137	IP40/20	IK02	50,000
2060606	Ascent 100 II DECO 650 4K STD EMG 120	7	653	93	4000	100	120	137	IP40/20	IK02	50,000
2060607	Ascent 100 II DECO 650 4K DALI 120	5	653	131	4000	350	120	137	IP40/20	IK02	50,000
2060608	Ascent 100 II DECO 650 4K DALI EMG 120	7	653	93	4000	350	120	137	IP40/20	IK02	50,000
2060615	Ascent 100 II DECO 900 4K STD 120	8	931	116	4000	150	120	137	IP40/20	IK02	50,000
2060616	Ascent 100 II DECO 900 4K STD EMG 120	10	931	93	4000	150	120	137	IP40/20	IK02	50,000
2060617	Ascent 100 II DECO 900 4K DALI 120	8	931	116	4000	150	120	137	IP40/20	IK02	50,000
2060618	Ascent 100 II DECO 900 4K DALI EMG 120	10	931	93	4000	150	120	137	IP40/20	IK02	50,000
2060625	Ascent 100 II DECO 1200 4K STD 120	10	1228	123	4000	200	120	137	IP40/20	IK02	50,000
2060626	Ascent 100 II DECO 1200 4K STD EMG 120	12	1228	102	4000	200	120	137	IP40/20	IK02	50,000
2060627	Ascent 100 II DECO 1200 4K DALI 120	10	1228	123	4000	700	120	137	IP40/20	IK02	50,000
2060628	Ascent 100 II DECO 1200 4K DALI EMG 120	12	1228	102	4000	700	120	137	IP40/20	IK02	50,000
2060635	Ascent 100 II DECO 1000 4K STD 160	7	1009	144	4000	150	160	178	IP40/20	IK02	50,000
2060636	Ascent 100 II DECO 1000 4K STD EMG 160	9	1009	112	4000	150	160	178	IP40/20	IK02	50,000
2060637	Ascent 100 II DECO 1000 4K DALI 160	7	1009	144	4000	350	160	178	IP40/20	IK02	50,000
2060638	Ascent 100 II DECO 1000 4K DALI EMG 160	9	1009	112	4000	350	160	178	IP40/20	IK02	50,000
2060645	Ascent 100 II DECO 1900 4K STD 160	17	1921	113	4000	300	160	178	IP40/20	IK02	50,000
2060646	Ascent 100 II DECO 1900 4K STD EMG 160	19	1921	101	4000	300	160	178	IP40/20	IK02	50,000
2060647	Ascent 100 II DECO 1900 4K DALI 160	17	1921	113	4000	700	160	178	IP40/20	IK02	50,000
2060648	Ascent 100 II DECO 1900 4K DALI EMG 160	19	1921	101	4000	700	160	178	IP40/20	IK02	50,000
2060655	Ascent 100 II DECO 2700 4K STD 160	21	2767	132	4000	1000	160	178	IP40/20	IK02	50,000
2060656	Ascent 100 II DECO 2700 4K STD EMG 160	23	2767	120	4000	1000	160	178	IP40/20	IK02	50,000
2060657	Ascent 100 II DECO 2700 4K DALI 160	21	2767	132	4000	400	160	178	IP40/20	IK02	50,000
2060658	Ascent 100 II DECO 2700 4K DALI EMG 160	23	2767	120	4000	400	160	178	IP40/20	IK02	50,000

Accessories	
Code	Description
2028033	Ascent 100 II IP44 CLEAR GLASS 120
2028035	Ascent 100 II IP44 FROSTED GLASS 120
2028039	Ascent 100 II IP44 CLEAR PC COVER 120
2028041	Ascent 100 II IP44 OPAL PC COVER 120
2028043	Ascent 100 II IP44 PRISMATIC PC COVER 120
2028045	Ascent 100 II ASYMMETRICAL IP44 LENS 120
2028047	Ascent 100 II OPAL DROPPED RING 120
2039012	Ascent 100 II IP54 PC COVER WHT 120
2059235	Ascent 100 II Kometa Ring 120
2028040	Ascent 100 II IP44 CLEAR PC COVER 160
2028042	Ascent 100 II IP44 OPAL PC COVER 160
2028044	Ascent 100 II IP44 PRISMATIC PC COVER 160

Accessories on the next page

2028046	Ascent 100 II Asym IP44 Lens 160
2028048	Ascent 100 II OPAL DROPPED RING 160
2059236	Ascent 100 II KOMETA RING 160

Concord Ascent 150

Product information

Product overview on page 28

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Diameter (mm)	Cut-out (mm)	IP rating	IK rating	Lifetime (hours)
Round - Aluminium reflector											
2059340	Ascent 150 II 1100 3K STD	10	1123	112	3000	350	160	176	IP44/20	IK02	50,000
2059341	Ascent 150 II 1100 3K DALI	10	1123	112	3000	350	160	176	IP44/20	IK02	50,000
2059342	Ascent 150 II 1100 3K STD EM	10	1123	112	3000	350	160	176	IP44/20	IK02	50,000
2059343	Ascent 150 II 1100 3K DALI EM	10	1123	112	3000	350	160	176	IP44/20	IK02	50,000
2059344	Ascent 150 II 1200 4K STD	10	1215	122	4000	350	160	176	IP44/20	IK02	50,000
2059345	Ascent 150 II 1200 4K DALI	10	1215	122	4000	350	160	176	IP44/20	IK02	50,000
2059346	Ascent 150 II 1200 4K STD EM	10	1215	122	4000	350	160	176	IP44/20	IK02	50,000
2059347	Ascent 150 II 1200 4K DALI EM	10	1215	122	4000	350	160	176	IP44/20	IK02	50,000
2059348	Ascent 150 II 1600 3K STD	14	1600	114	3000	500	160	176	IP44/20	IK02	50,000
2059349	Ascent 150 II 1600 3K DALI	14	1600	114	3000	500	160	176	IP44/20	IK02	50,000
2059350	Ascent 150 II 1600 3K STD EM	14	1600	114	3000	500	160	176	IP44/20	IK02	50,000
2059351	Ascent 150 II 1600 3K DALI EM	14	1600	114	3000	500	160	176	IP44/20	IK02	50,000
2059352	Ascent 150 II 1700 4K STD	14	1738	124	4000	500	160	176	IP44/20	IK02	50,000
2059353	Ascent 150 II 1700 4K DALI	14	1738	124	4000	500	160	176	IP44/20	IK02	50,000
2059354	Ascent 150 II 1700 4K STD EM	14	1738	124	4000	500	160	176	IP44/20	IK02	50,000
2059355	Ascent 150 II 1700 4K DALI EM	14	1738	124	4000	500	160	176	IP44/20	IK02	50,000
2059356	Ascent 150 II 2200 3K STD	19	2246	118	3000	700	160	176	IP44/20	IK02	50,000
2059357	Ascent 150 II 2200 3K DALI	19	2246	118	3000	700	160	176	IP44/20	IK02	50,000
2059358	Ascent 150 II 2200 3K STD EM	19	2246	118	3000	700	160	176	IP44/20	IK02	50,000
2059359	Ascent 150 II 2200 3K DALI EM	19	2246	118	3000	700	160	176	IP44/20	IK02	50,000
2059360	Ascent 150 II 2400 4K STD	19	2414	127	4000	700	160	176	IP44/20	IK02	50,000
2059361	Ascent 150 II 2400 4K DALI	19	2414	127	4000	700	160	176	IP44/20	IK02	50,000
2059362	Ascent 150 II 2400 4K STD EM	19	2414	127	4000	700	160	176	IP44/20	IK02	50,000
2059363	Ascent 150 II 2400 4K DALI EM	19	2414	127	4000	700	160	176	IP44/20	IK02	50,000
2059364	Ascent 150 II 3200 3K STD	28	3250	116	3000	1000	160	176	IP44/20	IK02	50,000
2059365	Ascent 150 II 3200 3K DALI	28	3250	116	3000	1000	160	176	IP44/20	IK02	50,000
2059366	Ascent 150 II 3200 3K STD EM	28	3250	116	3000	1000	160	176	IP44/20	IK02	50,000
2059367	Ascent 150 II 3200 3K DALI EM	28	3250	116	3000	1000	160	176	IP44/20	IK02	50,000
2059368	Ascent 150 II 3400 4K STD	28	3435	123	4000	1000	160	176	IP44/20	IK02	50,000
2059369	Ascent 150 II 3400 4K DALI	28	3435	123	4000	1000	160	176	IP44/20	IK02	50,000
2059370	Ascent 150 II 3400 4K STD EM	28	3435	123	4000	1000	160	176	IP44/20	IK02	50,000
2059371	Ascent 150 II 3400 4K DALI EM	28	3435	123	4000	1000	160	176	IP44/20	IK02	50,000
2698775	Ascent 150 II 3400 DALI TW	25	2000-2400	123	4000	700	160	176	IP44/20	IK02	50,000
Round - Office											
2059445	Ascent 150 II OFFICE 3K DALI	22	2052	93	3000	750	160	176	IP44/20	IK02	50,000
Round - White Reflector											
2059446	Ascent 150 II 2100 3K DALI WHT	19	2082	110	3000	700	160	176	IP44/20	IK02	50,000
2059447	Ascent 150 II 3100 3K DALI WHT	28	2967	106	3000	1000	160	176	IP44/20	IK02	50,000
2059448	Ascent 150 II 2100 4K DALI WHT	19	2413	127	4000	700	160	176	IP44/20	IK02	50,000
2059449	Ascent 150 II 3100 4K DALI WHT	28	3403	122	4000	1000	160	176	IP44/20	IK02	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Diameter (mm)	Cut-out (mm)	IP rating	IK rating	Lifetime (hours)
2059450	Ascent 150 II 3100 4K DALIEM WHT	28	3403	122	4000	1000	160	176	IP44/20	IK02	50,000
Square											
2059380	Ascent 150 II SQ 1100 3K STD	10	1163	116	3000	350		175x175	IP44/20	IK02	50,000
2059381	Ascent 150 II SQ 1100 3K DALI	10	1163	116	3000	350		175x175	IP44/20	IK02	50,000
2059382	Ascent 150 II SQ 1100 3K STD EM	10	1163	116	3000	350		175x175	IP44/20	IK02	50,000
2059383	Ascent 150 II SQ 1100 3K DALI EM	10	1163	116	3000	350		175x175	IP44/20	IK02	50,000
2059384	Ascent 150 II SQ 1200 4K STD	10	1246	125	4000	350		175x175	IP44/20	IK02	50,000
2059385	Ascent 150 II SQ 1200 4K DALI	10	1246	125	4000	350		175x175	IP44/20	IK02	50,000
2059386	Ascent 150 II SQ 1200 4K STD EM	10	1246	125	4000	350		175x175	IP44/20	IK02	50,000
2059387	Ascent 150 II SQ 1200 4K DALI EM	10	1246	125	4000	350		175x175	IP44/20	IK02	50,000
2059388	Ascent 150 II SQ 1600 3K STD	14	1600	114	3000	500		175x175	IP44/20	IK02	50,000
2059389	Ascent 150 II SQ 1600 3K DALI	14	1600	114	3000	500		175x175	IP44/20	IK02	50,000
2059390	Ascent 150 II SQ 1600 3K STD EM	14	1600	114	3000	500		175x175	IP44/20	IK02	50,000
2059391	Ascent 150 II SQ 1600 3K DALI EM	14	1600	114	3000	500		175x175	IP44/20	IK02	50,000
2059392	Ascent 150 II SQ 1700 4K STD	14	1778	127	4000	500		175x175	IP44/20	IK02	50,000
2059393	Ascent 150 II SQ 1700 4K DALI	14	1778	127	4000	500		175x175	IP44/20	IK02	50,000
2059394	Ascent 150 II SQ 1700 4K STD EM	14	1778	127	4000	500		175x175	IP44/20	IK02	50,000
2059395	Ascent 150 II SQ 1700 4K DALI EM	14	1778	127	4000	500		175x175	IP44/20	IK02	50,000
2059396	Ascent 150 II SQ 2300 3K STD	19	2322	122	3000	700		175x175	IP44/20	IK02	50,000
2059397	Ascent 150 II SQ 2300 3K DALI	19	2322	122	3000	700		175x175	IP44/20	IK02	50,000
2059398	Ascent 150 II SQ 2300 3K STD EM	19	2322	122	3000	700		175x175	IP44/20	IK02	50,000
2059399	Ascent 150 II SQ 2300 3K DALI EM	19	2322	122	3000	700		175x175	IP44/20	IK02	50,000
2059400	Ascent 150 II SQ 2400 4K STD	19	2483	131	4000	700		175x175	IP44/20	IK02	50,000
2059401	Ascent 150 II SQ 2400 4K DALI	19	2483	131	4000	700		175x175	IP44/20	IK02	50,000
2059402	Ascent 150 II SQ 2400 4K STD EM	19	2483	131	4000	700		175x175	IP44/20	IK02	50,000
2059403	Ascent 150 II SQ 2400 4K DALI EM	19	2483	131	4000	700		175x175	IP44/20	IK02	50,000
2059404	Ascent 150 II SQ 3200 3K STD	28	3284	117	3000	1000		175x175	IP44/20	IK02	50,000
2059405	Ascent 150 II SQ 3200 3K DALI	28	3284	117	3000	1000		175x175	IP44/20	IK02	50,000
2059407	Ascent 150 II SQ 3200 3K DALI EM	28	3284	117	3000	1000		175x175	IP44/20	IK02	50,000
2059408	Ascent 150 II SQ 3500 4K STD	28	3512	125	4000	1000		175x175	IP44/20	IK02	50,000
2059409	Ascent 150 II SQ 3500 4K DALI	28	3512	125	4000	1000		175x175	IP44/20	IK02	50,000
2059410	Ascent 150 II SQ 3500 4K STD EM	28	3512	125	4000	1000		175x175	IP44/20	IK02	50,000
2059411	Ascent 150 II SQ 3500 4K DALI EM	28	3512	125	4000	1000		175x175	IP44/20	IK02	50,000

Accessories	
Code	Description
2056146	Ascent 150 II PULL UP ACCESSORY ROUND SILVER
2056147	Ascent 150 II PULL UP ACCESSORY ROUND WHITE
2056148	Ascent 150 II PULL UP ACCESSORY ROUND BLACK
2028034	Ascent 100/150 II IP44 CLEAR GLASS 160
2028036	Ascent 100/150 II IP44 FROST GLASS 160
2028038	Ascent 150 II SILVER BEZEL ONLY
2028060	Ascent 150 II ETCHED GLASS DISC WHITE BEZEL
2028549	Ascent 150 II GLASS RING + CYLINDER WHITE BEZEL
2028600	Ascent 150 II IP44 CLEAR GLASS SILVER BEZEL
2028602	Ascent 150 II IP44 ETCHED GLASS SILVER BEZEL
2028614	Ascent 150 II WHITE BEZEL ONLY
2034493	Floating Frosted Cylinder Blue Ring - White Bezel
2038980	Ascent 150 II FROSTED GLASS RING WHITE BEZEL
2039013	Ascent 100/150 II IP54 PC COVER 160

Concord Ascent 150 Wallwash

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Diameter (mm)	Cut-out (mm)	IP rating	IK rating	Lifetime (hours)
2059372	Ascent 150 II WW 1600 3K STD	14	1613	115	3000	500	215	235	IP44/20	IK02	50,000
2059373	Ascent 150 II WW 1600 3K DALI	14	1613	115	3000	500	215	235	IP44/20	IK02	50,000
2059374	Ascent 150 II WW 1700 4K STD	14	1718	123	4000	500	215	235	IP44/20	IK02	50,000
2059375	Ascent 150 II WW 1700 4K DALI	14	1718	123	4000	500	215	235	IP44/20	IK02	50,000
2059376	Ascent 150 II WW 3200 3K STD	28	3222	115	3000	1000	215	235	IP44/20	IK02	50,000
2059377	Ascent 150 II WW 3200 3K DALI	28	3222	115	3000	1000	215	235	IP44/20	IK02	50,000
2059378	Ascent 150 II WW 3400 4K STD	28	3405	122	4000	1000	215	235	IP44/20	IK02	50,000
2059379	Ascent 150 II WW 3400 4K DALI	28	3405	122	4000	1000	215	235	IP44/20	IK02	50,000

Concord Domino

Product information

Item Code	Description	Reflector color	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Beam angle (°)	Lifetime (hours)
1 x LED – 3000K									
2061026	Domino 1xLED 930 Black NB Trim White	Black	4	180	45	3000K	700	15°	50,000
2061027	Domino 1xLED 930 Black NB Trim Black	Black	4	180	45	3000K	700	15°	50,000
2061028	Domino 1xLED 930 Black NB TrimLess White	Black	4	180	45	3000K	700	15°	50,000
2061044	Domino 1xLED 930 Gold MB Trim White	Gold	4	180	45	3000K	700	30°	50,000
2061050	Domino 1xLED 930 Black MB Trim White	Black	4	180	45	3000K	700	30°	50,000
2061051	Domino 1xLED 930 Black MB Trim Black	Black	4	180	45	3000K	700	30°	50,000
2061052	Domino 1xLED 930 Black MB TrimLess White	Black	4	180	45	3000K	700	30°	50,000
2061056	Domino 1xLED 930 White MB Trim White	White	4	180	45	3000K	700	30°	50,000
2061062	Domino 1xLED 930 Chrome MB Trim White	Chrome	4	180	45	3000K	700	30°	50,000
2061302	Domino 1xLED 930 Black NB Trim White DALI	Black	4	180	45	3000K	700	15°	50,000
2061303	Domino 1xLED 930 Black NB Trim Black DALI	Black	4	180	45	3000K	700	15°	50,000
2061326	Domino 1xLED 930 Black MB Trim White DALI	Black	4	180	45	3000K	700	30°	50,000
2061327	Domino 1xLED 930 Black MB Trim Black DALI	Black	4	180	45	3000K	700	30°	50,000
4000K									
2061029	Domino 1xLED 940 Black NB Trim White	Black	4	180	45	4000K	700	15°	50,000
2061030	Domino 1xLED 940 Black NB Trim Black	Black	4	180	45	4000K	700	15°	50,000
2061031	Domino 1xLED 940 Black NB TrimLess White	Black	4	180	45	4000K	700	15°	50,000
2061053	Domino 1xLED 940 Black MB Trim White	Black	4	180	45	4000K	700	30°	50,000
2061054	Domino 1xLED 940 Black MB Trim Black	Black	4	180	45	4000K	700	30°	50,000
2061055	Domino 1xLED 940 Black MB TrimLess White	Black	4	180	45	4000K	700	30°	50,000
2061305	Domino 1xLED 940 Black NB Trim White DALI	Black	4	180	45	4000K	700	15°	50,000
2061306	Domino 1xLED 940 Black NB Trim Black DALI	Black	4	180	45	4000K	700	15°	50,000
2061329	Domino 1xLED 940 Black MB Trim White DALI	Black	4	180	45	4000K	700	30°	50,000
2061330	Domino 1xLED 940 Black MB Trim Black DALI	Black	4	180	45	4000K	700	30°	50,000
1 x LED – 3000K									
2061074	Domino 2xLED 930 Black NB Trim White	Black	6	350	58	3000K	700	15°	50,000
2061075	Domino 2xLED 930 Black NB Trim Black	Black	6	350	58	3000K	700	15°	50,000
2061076	Domino 2xLED 930 Black NB TrimLess White	Black	6	350	58	3000K	700	15°	50,000
2061092	Domino 2xLED 930 Gold MB Trim White	Gold	6	350	58	3000K	700	30°	50,000
2061098	Domino 2xLED 930 Black MB Trim White	Black	6	350	58	3000K	700	30°	50,000
2061099	Domino 2xLED 930 Black MB Trim Black	Black	6	350	58	3000K	700	30°	50,000

Item Code	Description	Reflector color	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Beam angle (°)	Lifetime (hours)
2061100	Domino 2xLED 930 Black MB TrimLess White	Black	6	350	58	3000K	700	30°	50,000
2061104	Domino 2xLED 930 White MB Trim White	White	6	350	58	3000K	700	30°	50,000
2061110	Domino 2xLED 930 Chrome MB Trim White	Chrome	6	350	58	3000K	700	30°	50,000
2061350	Domino 2xLED 930 Black NB Trim White DALI	Black	6	350	58	3000K	700	15°	50,000
2061351	Domino 2xLED 930 Black NB Trim Black DALI	Black	6	350	58	3000K	700	15°	50,000
2061374	Domino 2xLED 930 Black MB Trim White DALI	Black	6	350	58	3000K	700	30°	50,000
2061375	Domino 2xLED 930 Black MB Trim Black DALI	Black	6	350	58	3000K	700	30°	50,000
4000K									
2061077	Domino 2xLED 940 Black NB Trim White	Black	6	350	58	4000K	700	15°	50,000
2061078	Domino 2xLED 940 Black NB Trim Black	Black	6	350	58	4000K	700	15°	50,000
2061079	Domino 2xLED 940 Black NB TrimLess White	Black	6	350	58	4000K	700	15°	50,000
2061101	Domino 2xLED 940 Black MB Trim White	Black	6	350	58	4000K	700	30°	50,000
2061102	Domino 2xLED 940 Black MB Trim Black	Black	6	350	58	4000K	700	30°	50,000
2061103	Domino 2xLED 940 Black MB TrimLess White	Black	6	350	58	4000K	700	30°	50,000
2061353	Domino 2xLED 940 Black NB Trim White DALI	Black	6	350	58	4000K	700	15°	50,000
2061354	Domino 2xLED 940 Black NB Trim Black DALI	Black	6	350	58	4000K	700	15°	50,000
2061377	Domino 2xLED 940 Black MB Trim White DALI	Black	6	350	58	4000K	700	30°	50,000
2061378	Domino 2xLED 940 Black MB Trim Black DALI	Black	6	350	58	4000K	700	30°	50,000
1 x LED – 3000K									
2061122	Domino 5xLED 930 Black NB Trim White	Black	13	900	69	3000K	700	15°	50,000
2061123	Domino 5xLED 930 Black NB Trim Black	Black	13	900	69	3000K	700	15°	50,000
2061124	Domino 5xLED 930 Black NB TrimLess White	Black	13	900	69	3000K	700	15°	50,000
2061140	Domino 5xLED 930 Gold MB Trim White	Gold	13	900	69	3000K	700	30°	50,000
2061146	Domino 5xLED 930 Black MB Trim White	Black	13	900	69	3000K	700	30°	50,000
2061147	Domino 5xLED 930 Black MB Trim Black	Black	13	900	69	3000K	700	30°	50,000
2061148	Domino 5xLED 930 Black MB TrimLess White	Black	13	900	69	3000K	700	30°	50,000
2061152	Domino 5xLED 930 White MB Trim White	White	13	900	69	3000K	700	30°	50,000
2061158	Domino 5xLED 930 Chrome MB Trim White	Chrome	13	900	69	3000K	700	30°	50,000
2061260	Domino 5xLED 930 Opal AY Trim White	Opal	13	900	69	3000K	700	ASYM	50,000
2061261	Domino 5xLED 930 Opal AY Trim Black	Opal	13	900	69	3000K	700	ASYM	50,000
2061262	Domino 5xLED 930 Opal AY TrimLess White	Opal	13	900	69	3000K	700	ASYM	50,000
2061278	Domino 5xLED 930 Opal WB Trim White	Opal	13	900	69	3000K	700	110°	50,000
2061279	Domino 5xLED 930 Opal WB Trim Black	Opal	13	900	69	3000K	700	110°	50,000
2061280	Domino 5xLED 930 Opal WB TrimLess White	Opal	13	900	69	3000K	700	110°	50,000
2061398	Domino 5xLED 930 Black NB Trim White DALI	Black	13	900	69	3000K	700	15°	50,000
2061399	Domino 5xLED 930 Black NB Trim Black DALI	Black	13	900	69	3000K	700	15°	50,000
2061422	Domino 5xLED 930 Black MB Trim White DALI	Black	13	900	69	3000K	700	30°	50,000
2061423	Domino 5xLED 930 Black MB Trim Black DALI	Black	13	900	69	3000K	700	30°	50,000
4000K									
2061125	Domino 5xLED 940 Black NB Trim White	Black	13	900	69	4000K	700	15°	50,000
2061126	Domino 5xLED 940 Black NB Trim Black	Black	13	900	69	4000K	700	15°	50,000
2061127	Domino 5xLED 940 Black NB TrimLess White	Black	13	900	69	4000K	700	15°	50,000
2061149	Domino 5xLED 940 Black MB Trim White	Black	13	900	69	4000K	700	30°	50,000
2061150	Domino 5xLED 940 Black MB Trim Black	Black	13	900	69	4000K	700	30°	50,000
2061151	Domino 5xLED 940 Black MB TrimLess White	Black	13	900	69	4000K	700	30°	50,000
2061263	Domino 5xLED 940 Opal AY Trim White	Opal	13	900	69	4000K	700	ASYM	50,000
2061264	Domino 5xLED 940 Opal AY Trim Black	Opal	13	900	69	4000K	700	ASYM	50,000
2061265	Domino 5xLED 940 Opal AY TrimLess White	Opal	13	900	69	4000K	700	ASYM	50,000
2061281	Domino 5xLED 940 Opal WB Trim White	Opal	13	900	69	4000K	700	110°	50,000

Item Code	Description	Reflector color	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	Beam angle (°)	Lifetime (hours)
2061282	Domino 5xLED 940 Opal WB Trim Black	Opal	13	900	69	4000K	700	110°	50,000
2061283	Domino 5xLED 940 Opal WB TrimLess White	Opal	13	900	69	4000K	700	110°	50,000
2061401	Domino 5xLED 940 Black NB Trim White DALI	Black	13	900	69	4000K	700	15°	50,000
2061402	Domino 5xLED 940 Black NB Trim Black DALI	Black	13	900	69	4000K	700	15°	50,000
2061425	Domino 5xLED 940 Black MB Trim White DALI	Black	13	900	69	4000K	700	30°	50,000
2061426	Domino 5xLED 940 Black MB Trim Black DALI	Black	13	900	69	4000K	700	30°	50,000
1 x LED – 3000K									
2061170	Domino 10xLED 930 Black NB Trim White	Black	23	1800	78	3000K	700	15°	50,000
2061171	Domino 10xLED 930 Black NB Trim Black	Black	23	1800	78	3000K	700	15°	50,000
2061172	Domino 10xLED 930 Black NB TrimLess White	Black	23	1800	78	3000K	700	15°	50,000
2061188	Domino 10xLED 930 Gold MB Trim White	Gold	23	1800	78	3000K	700	30°	50,000
2061194	Domino 10xLED 930 Black MB Trim White	Black	23	1800	78	3000K	700	30°	50,000
2061195	Domino 10xLED 930 Black MB Trim Black	Black	23	1800	78	3000K	700	30°	50,000
2061196	Domino 10xLED 930 Black MB TrimLess White	Black	23	1800	78	3000K	700	30°	50,000
2061200	Domino 10xLED 930 White MB Trim White	White	23	1800	78	3000K	700	30°	50,000
2061206	Domino 10xLED 930 Chrome MB Trim White	Chrome	23	1800	78	3000K	700	30°	50,000
2061266	Domino 10xLED 930 Opal AY Trim White	Opal	23	1800	78	3000K	700	ASYM	50,000
2061267	Domino 10xLED 930 Opal AY Trim Black	Opal	23	1800	78	3000K	700	ASYM	50,000
2061268	Domino 10xLED 930 Opal AY TrimLess White	Opal	23	1800	78	3000K	700	ASYM	50,000
2061284	Domino 10xLED 930 Opal WB Trim White	Opal	23	1800	78	3000K	700	110°	50,000
2061285	Domino 10xLED 930 Opal WB Trim Black	Opal	23	1800	78	3000K	700	110°	50,000
2061286	Domino 10xLED 930 Opal WB TrimLess White	Opal	23	1800	78	3000K	700	110°	50,000
2061446	Domino 10xLED 930 Black NB Trim White DALI	Black	23	1800	78	3000K	700	15°	50,000
2061447	Domino 10xLED 930 Black NB Trim Black DALI	Black	23	1800	78	3000K	700	15°	50,000
2061470	Domino 10xLED 930 Black MB Trim White DALI	Black	23	1800	78	3000K	700	30°	50,000
2061471	Domino 10xLED 930 Black MB Trim Black DALI	Black	23	1800	78	3000K	700	30°	50,000
4000K									
2061173	Domino 10xLED 940 Black NB Trim White	Black	23	1800	78	4000K	700	15°	50,000
2061174	Domino 10xLED 940 Black NB Trim Black	Black	23	1800	78	4000K	700	15°	50,000
2061175	Domino 10xLED 940 Black NB TrimLess White	Black	23	1800	78	4000K	700	15°	50,000
2061197	Domino 10xLED 940 Black MB Trim White	Black	23	1800	78	4000K	700	30°	50,000
2061198	Domino 10xLED 940 Black MB Trim Black	Black	23	1800	78	4000K	700	30°	50,000
2061199	Domino 10xLED 940 Black MB TrimLess White	Black	23	1800	78	4000K	700	30°	50,000
2061269	Domino 10xLED 940 Opal AY Trim White	Opal	23	1800	78	4000K	700	ASYM	50,000
2061270	Domino 10xLED 940 Opal AY Trim Black	Opal	23	1800	78	4000K	700	ASYM	50,000
2061271	Domino 10xLED 940 Opal AY TrimLess White	Opal	23	1800	78	4000K	700	ASYM	50,000
2061287	Domino 10xLED 940 Opal WB Trim White	Opal	23	1800	78	4000K	700	110°	50,000
2061288	Domino 10xLED 940 Opal WB Trim Black	Opal	23	1800	78	4000K	700	110°	50,000
2061289	Domino 10xLED 940 Opal WB TrimLess White	Opal	23	1800	78	4000K	700	110°	50,000
2061449	Domino 10xLED 940 Black NB Trim White DALI	Black	23	1800	78	4000K	700	15°	50,000
2061450	Domino 10xLED 940 Black NB Trim Black DALI	Black	23	1800	78	4000K	700	15°	50,000
2061473	Domino 10xLED 940 Black MB Trim White DALI	Black	23	1800	78	4000K	700	30°	50,000
2061474	Domino 10xLED 940 Black MB Trim Black DALI	Black	23	1800	78	4000K	700	30°	50,000

Concord Pixer Wall

Product information

Product overview on page 31											
Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Height (mm)	Length (mm)	IP rating	Lifetime (hours)
2069454	Pixer Wall 325x325 HO 1P 3000K DALI	16	1850	116	3000	500	80	79	257	IP20	46000
2069455	Pixer Wall 325x325 HO 1P 3000K SSC01	17	1850	109	3000	500	80	79	257	IP20	46000
2069456	Pixer Wall 325x325 HO 1P 3000K DALI EMD	19	1850	97	3000	500	80	79	257	IP20	46000
2069457	Pixer Wall 325x325 HO 1P 3000K SSC01 EM SELFTEST	20	1850	93	3000	500	80	79	257	IP20	46000
2069460	Pixer Wall 325x325 HO 1P 4000K DALI	16	1900	119	4000	500	80	79	257	IP20	46000
2069461	Pixer Wall 325x325 HO 1P 4000K SSC01	17	1900	112	4000	500	80	79	257	IP20	46000
2069462	Pixer Wall 325x325 HO 1P 4000K DALI EMD	19	1900	100	4000	500	80	79	257	IP20	46000
2069463	Pixer Wall 325x325 HO 1P 4000K SSC01 EM SELFTEST	20	1900	95	4000	500	80	79	257	IP20	46000

Concord Tide

Product information

Product overview on page 32								
Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Lifetime (hours)
Recessed High Efficiency – Asymmetric								
2059816	Tide Asym 93 3K Recessed	27	2019	75	3000	350	90	60,000
2059817	Tide Asym 93 3K Recessed DALI	27	2019	75	3000	350	90	60,000
2059818	Tide Asym 93 4K Recessed	27	2021	75	4000	350	90	60,000
2059819	Tide Asym 93 4K Recessed DALI	27	2021	75	4000	350	90	60,000
Symmetric Wide								
2059820	Tide Wide 93 3K Recessed	27	1842	68	3000	350	90	60,000
2059821	Tide Wide 93 3K Recessed DALI	27	1842	68	3000	350	90	60,000
2059822	Tide Wide 93 4K Recessed	27	1871	69	4000	350	90	60,000
2059823	Tide Wide 93 4K Recessed DALI	27	1871	69	4000	350	90	60,000
Double Asymmetric								
2059824	Tide Dasym 93 3K Recessed	27	1934	72	3000	350	90	60,000
2059825	Tide Dasym 93 3K Recessed DALI	27	1934	72	3000	350	90	60,000
2059826	Tide Dasym 93 4K Recessed	27	1973	73	4000	350	90	60,000
2059827	Tide Dasym 93 4K Recessed DALI	27	1973	73	4000	350	90	60,000
Recessed High Output – Asymmetric								
2059844	Tide HO Asym 93 3K Recessed	40	2591	65	3000	500	90	60,000
2059845	Tide HO Asym 93 3K Recessed DALI	40	2591	65	3000	500	90	60,000
2059846	Tide HO Asym 93 4K Recessed	40	2641	66	4000	500	90	60,000
2059847	Tide HO Asym 93 4K Recessed DALI	40	2641	66	4000	500	90	60,000
Symmetric Wide								
2059848	Tide HO Wide 93 3K Recessed	40	2397	60	3000	500	90	60,000
2059849	Tide HO Wide 93 3K Recessed DALI	40	2397	60	3000	500	90	60,000
2059850	Tide HO Wide 93 4K Recessed	40	2465	62	4000	500	90	60,000
2059851	Tide HO Wide 93 4K Recessed DALI	40	2465	62	4000	500	90	60,000
Double Asymmetric								
2059852	Tide HO Dasym 93 3K Recessed	40	2493	62	3000	500	90	60,000
2059853	Tide HO Dasym 93 3K Recessed DALI	40	2493	62	3000	500	90	60,000
2059854	Tide HO Dasym 93 4K Recessed	40	2576	64	4000	500	90	60,000
2059855	Tide HO Dasym 93 4K Recessed DALI	40	2576	64	4000	500	90	60,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Lifetime (hours)
Track High Efficiency – Asymmetric								
2059800	Tide Asym 93 3K L3 LEFT	27	2019	75	3000	350	90	60,000
2059801	Tide Asym 93 3K L3+DALI LEFT	27	2019	75	3000	350	90	60,000
2059802	Tide Asym 93 4K L3 LEFT	27	2021	75	4000	350	90	60,000
2059803	Tide Asym 93 4K L3+DALI LEFT	27	2021	75	4000	350	90	60,000
2059804	Tide Asym 93 3K L3-RIGHT	27	2019	75	3000	350	90	60,000
2059805	Tide Asym 93 3K L3+DALI RIGHT	27	2019	75	3000	350	90	60,000
2059806	Tide Asym 93 4K L3-RIGHT	27	2021	75	4000	350	90	60,000
2059807	Tide Asym 93 4K L3+DALI RIGHT	27	2021	75	4000	350	90	60,000
Symmetric Wide								
2059808	Tide Wide 93 3K L3	27	1842	68	3000	350	90	60,000
2059809	Tide Wide 93 3K L3+DALI	27	1842	68	3000	350	90	60,000
2059810	Tide Wide 93 4K L3	27	1871	69	4000	350	90	60,000
2059811	Tide Wide 93 4K L3+DALI	27	1871	69	4000	350	90	60,000
Double Asymmetric								
2059812	Tide Dasym 93 3K L3	27	1934	72	3000	350	90	60,000
2059813	Tide Dasym 93 3K L3+DALI	27	1934	72	3000	350	90	60,000
2059814	Tide Dasym 93 4K L3	27	1973	73	4000	350	90	60,000
2059815	Tide Dasym 93 4K L3+DALI	27	1973	73	4000	350	90	60,000
Track High Output – Asymmetric								
2059828	Tide HO Asym 93 3K L3 LEFT	40	2591	65	3000	500	90	60,000
2059829	Tide HO Asym 93 3K L3+DALI LEFT	40	2591	65	3000	500	90	60,000
2059830	Tide HO Asym 93 4K L3 LEFT	40	2641	66	4000	500	90	60,000
2059831	Tide HO Asym 93 4K L3+DALI LEFT	40	2641	66	4000	500	90	60,000
2059832	Tide HO Asym 93 3K L3-RIGHT	40	2591	65	3000	500	90	60,000
2059833	Tide HO Asym 93 3K L3+DALI RIGHT	40	2591	65	3000	500	90	60,000
2059834	Tide HO Asym 93 4K L3-RIGHT	40	2641	66	4000	500	90	60,000
2059835	Tide HO Asym 93 4K L3+DALI RIGHT	40	2641	66	4000	500	90	60,000
Symmetric Wide								
2059836	Tide HO Wide 93 3K L3	40	2397	60	3000	500	90	60,000
2059837	Tide HO Wide 93 3K L3+DALI	40	2397	60	3000	500	90	60,000
2059838	Tide HO Wide 93 4K L3	40	2465	62	4000	500	90	60,000
2059839	Tide HO Wide 93 4K L3+DALI	40	2465	62	4000	500	90	60,000
Double Asymmetric								
2059840	Tide HO Dasym 93 3K L3	40	2493	62	3000	500	90	60,000
2059841	Tide HO Dasym 93 3K L3+DALI	40	2493	62	3000	500	90	60,000
2059842	Tide HO Dasym 93 4K L3	40	2576	64	4000	500	90	60,000
2059843	Tide HO Dasym 93 4K L3+DALI	40	2576	64	4000	500	90	60,000

Beacon LED XL & XXL

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED 3000K									
2059580	Beacon 93 CRI 3K Narrow Beam L1 Black	21	1512	72	3000	500	93	12	50,000
2059581	Beacon 93 CRI 3K Narrow Beam L1 White	21	1512	72	3000	500	93	12	50,000
2059586	Beacon 93 CRI 3K Medium Beam L1 Black	21	1753	83	3000	500	93	38	50,000
2059587	Beacon 93 CRI 3K Medium Beam L1 White	21	1753	83	3000	500	93	38	50,000
2059592	Beacon 93 CRI 3K Wide Beam L1 Black	21	1700	81	3000	500	93	55	50,000
2059593	Beacon 93 CRI 3K Wide Beam L1 White	21	1700	81	3000	500	93	55	50,000
2059616	Beacon 93 CRI 3K Narrow Beam L3 Black	21	1512	72	3000	500	93	12	50,000
2059617	Beacon 93 CRI 3K Narrow Beam L3 White	21	1512	72	3000	500	93	12	50,000
2059622	Beacon 93 CRI 3K Medium Beam L3 Black	21	1753	83	3000	500	93	38	50,000
2059623	Beacon 93 CRI 3K Medium Beam L3 White	21	1753	83	3000	500	93	38	50,000
2059628	Beacon 93 CRI 3K Wide Beam L3 Black	21	1700	81	3000	500	93	55	50,000
2059629	Beacon 93 CRI 3K Wide Beam L3 White	21	1700	81	3000	500	93	55	50,000
Beacon LED 3000K Switch DIM									
2059582	Beacon 93 CRI 3K Narrow Beam L1 On-Board DIM Black	21	1512	72	3000	500	93	12	50,000
2059583	Beacon 93 CRI 3K Narrow Beam L1 On-Board DIM White	21	1512	72	3000	500	93	12	50,000
2059588	Beacon 93 CRI 3K Medium Beam L1 On-Board DIM Black	21	1753	83	3000	500	93	38	50,000
2059589	Beacon 93 CRI 3K Medium Beam L1 On-Board DIM White	21	1753	83	3000	500	93	38	50,000
2059594	Beacon 93 CRI 3K Wide Beam L1 On-Board DIM Black	21	1700	81	3000	500	93	55	50,000
2059595	Beacon 93 CRI 3K Wide Beam L1 On-Board DIM White	21	1700	81	3000	500	93	55	50,000
2059618	Beacon 93 CRI 3K Narrow Beam L3 On-Board DIM Black	21	1512	72	3000	500	93	12	50,000
2059619	Beacon 93 CRI 3K Narrow Beam L3 On-Board DIM White	21	1512	72	3000	500	93	12	50,000
2059624	Beacon 93 CRI 3K Medium Beam L3 On-Board DIM Black	21	1753	83	3000	500	93	38	50,000
2059625	Beacon 93 CRI 3K Medium Beam L3 On-Board DIM White	21	1753	83	3000	500	93	38	50,000
2059630	Beacon 93 CRI 3K Wide Beam L3 On-Board DIM Black	21	1700	81	3000	500	93	55	50,000
2059631	Beacon 93 CRI 3K Wide Beam L3 On-Board DIM White	21	1700	81	3000	500	93	55	50,000
Beacon LED 3000K DALI									
2059620	Beacon 93 CRI 3K Narrow Beam L3+DALI Black	21	1512	72	3000	500	93	12	50,000
2059621	Beacon 93 CRI 3K Narrow Beam L3+DALI White	21	1512	72	3000	500		12	50,000
2059626	Beacon 93 CRI 3K Medium Beam L3+DALI Black	21	1753	83	3000	500	93	38	50,000
2059627	Beacon 93 CRI 3K Medium Beam L3+DALI White	21	1753	83	3000	500	93	38	50,000
2059632	Beacon 93 CRI 3K Wide Beam L3+DALI Black	21	1700	81	3000	500	93	55	50,000
2059633	Beacon 93 CRI 3K Wide Beam L3+DALI White	21	1700	81	3000	500	93	55	50,000
Beacon LED 4000K									
2059598	Beacon 93 CRI 4K Narrow Beam L1 Black	21	1669	79	4000	500	93	12	50,000
2059599	Beacon 93 CRI 4K Narrow Beam L1 White	21	1669	79	4000	500	93	12	50,000
2059604	Beacon 93 CRI 4K Medium Beam L1 Black	21	1885	90	4000	500	93	38	50,000
2059605	Beacon 93 CRI 4K Medium Beam L1 White	21	1885	90	4000	500	93	38	50,000
2059612	Beacon 93 CRI 4K Wide Beam L1 On-Board DIM Black	21	1853	88	4000	500	93	55	50,000
2059613	Beacon 93 CRI 4K Wide Beam L1 On-Board DIM White	21	1853	88	4000	500	93	55	50,000
2059634	Beacon 93 CRI 4K Narrow Beam L3 Black	21	1669	79	4000	500	93	12	50,000
2059635	Beacon 93 CRI 4K Narrow Beam L3 White	21	1669	79	4000	500	93	12	50,000
2059640	Beacon 93 CRI 4K Medium Beam L3 Black	21	1885	90	4000	500	93	38	50,000
2059641	Beacon 93 CRI 4K Medium Beam L3 White	21	1885	90	4000	500	93	38	50,000
2059646	Beacon 93 CRI 4K Wide Beam L3 Black	21	1853	88	4000	500	93	55	50,000
2059647	Beacon 93 CRI 4K Wide Beam L3 White	21	1853	88	4000	500	93	55	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED 4000K Switch DIM									
2059600	Beacon 93 CRI 4K Narrow Beam L1 On-Board DIM Black	21	1669	79	4000	500	93	12	50,000
2059601	Beacon 93 CRI 4K Narrow Beam L1 On-Board DIM White	21	1669	79	4000	500	93	12	50,000
2059606	Beacon 93 CRI 4K Medium Beam L1 On-Board DIM Black	21	1885	90	4000	500	93	38	50,000
2059607	Beacon 93 CRI 4K Medium Beam L1 On-Board DIM White	21	1885	90	4000	500	93	38	50,000
2059612	Beacon 93 CRI 4K Wide Beam L1 On-Board DIM Black	21	1853	88	4000	500	93	55	50,000
2059613	Beacon 93 CRI 4K Wide Beam L1 On-Board DIM White	21	1853	88	4000	500	93	55	50,000
2059636	Beacon 93 CRI 4K Narrow Beam L3 On-Board DIM Black	21	1669	79	4000	500	93	12	50,000
2059637	Beacon 93 CRI 4K Narrow Beam L3 On-Board DIM White	21	1669	79	4000	500	93	12	50,000
2059601	Beacon 93 CRI 4K Narrow Beam L1 On-Board DIM White	21	1669	79	4000	500	93	12	50,000
2059642	Beacon 93 CRI 4K Medium Beam L3 On-Board DIM Black	21	1885	90	4000	500	93	38	50,000
2059643	Beacon 93 CRI 4K Medium Beam L3 On-Board DIM White	21	1885	90	4000	500	93	38	50,000
2059648	Beacon 93 CRI 4K Wide Beam L3 On-Board DIM Black	21	1853	88	4000	500	93	55	50,000
2059649	Beacon 93 CRI 4K Wide Beam L3 On-Board DIM White	21	1853	88	4000	500	93	55	50,000
Beacon LED 4000K DALI									
2059638	Beacon 93 CRI 4K Narrow Beam L3+DALI Black	21	1669	79	4000	500	93	12	50,000
2059639	Beacon 93 CRI 4K Narrow Beam L3+DALI White	21	1669	79	4000	500	93	12	50,000
2059644	Beacon 93 CRI 4K Medium Beam L3+DALI Black	21	1885	90	4000	500	93	38	50,000
2059645	Beacon 93 CRI 4K Medium Beam L3+DALI White	21	1885	90	4000	500	93	38	50,000
2059650	Beacon 93 CRI 4K Wide Beam L3+DALI Black	21	1853	88	4000	500	93	55	50,000
2059651	Beacon 93 CRI 4K Wide Beam L3+DALI White	21	1853	88	4000	500	93	55	50,000
Beacon LED 3000K High Output									
2059652	Beacon 85 CRI 3K Narrow Beam L1 Black	21	2013	96	3000	500	85	12	50,000
2059653	Beacon 85 CRI 3K Narrow Beam L1 White	21	2013	96	3000	500	85	12	50,000
2059654	Beacon 85 CRI 3K Medium Beam L1 Black	21	2269	108	3000	500	85	38	50,000
2059655	Beacon 85 CRI 3K Medium Beam L1 White	21	2269	108	3000	500	85	38	50,000
2059656	Beacon 85 CRI 3K Wide Beam L1 Black	21	2208	105	3000	500	85	55	50,000
2059657	Beacon 85 CRI 3K Wide Beam L1 White	21	2208	105	3000	500	85	55	50,000
2059664	Beacon 85 CRI 3K Narrow Beam L3 Black	21	2013	96	3000	500	85	12	50,000
2059665	Beacon 85 CRI 3K Narrow Beam L3 White	21	2013	96	3000	500	85	12	50,000
2059666	Beacon 85 CRI 3K Medium Beam L3 Black	21	2269	108	3000	500	85	38	50,000
2059667	Beacon 85 CRI 3K Medium Beam L3 White	21	2269	108	3000	500	85	38	50,000
2059668	Beacon 85 CRI 3K Wide Beam L3 Black	21	2208	105	3000	500	85	55	50,000
2059669	Beacon 85 CRI 3K Wide Beam L3 White	21	2208	105	3000	500	85	55	50,000
Beacon LED 4000K High Output									
2059658	Beacon 85 CRI 4K Narrow Beam L1 Black	21	2136	102	4000	500	85	12	50,000
2059659	Beacon 85 CRI 4K Narrow Beam L1 White	21	2136	102	4000	500	85	12	50,000
2059660	Beacon 85 CRI 4K Medium Beam L1 Black	21	2348	112	4000	500	85	38	50,000
2059661	Beacon 85 CRI 4K Medium Beam L1 White	21	2348	112	4000	500	85	38	50,000
2059662	Beacon 85 CRI 4K Wide Beam L1 Black	21	2301	110	4000	500	85	55	50,000
2059663	Beacon 85 CRI 4K Wide Beam L1 White	21	2301	110	4000	500	85	55	50,000
2059670	Beacon 85 CRI 4K Narrow Beam L3 Black	21	2136	102	4000	500	85	12	50,000
2059671	Beacon 85 CRI 4K Narrow Beam L3 White	21	2136	102	4000	500	85	12	50,000
2059672	Beacon 85 CRI 4K Medium Beam L3 Black	21	2348	112	4000	500	85	38	50,000
2059673	Beacon 85 CRI 4K Medium Beam L3 White	21	2348	112	4000	500	85	38	50,000
2059674	Beacon 85 CRI 4K Wide Beam L3 Black	21	2301	110	4000	500	85	55	50,000
2059675	Beacon 85 CRI 4K Wide Beam L3 White	21	2301	110	4000	500	85	55	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED XL 3000K									
2059676	Beacon XL 93 CRI 3K Narrow Beam L3 Black	33	3103	94	3000	800	93	15	50,000
2059677	Beacon XL 93 CRI 3K Narrow Beam L3 White	33	3103	94	3000	800	93	15	50,000
2059682	Beacon XL 93 CRI 3K Medium Beam L3 Black	33	3060	93	3000	800	93	34	50,000
2059683	Beacon XL 93 CRI 3K Medium Beam L3 White	33	3060	93	3000	800	93	34	50,000
2059688	Beacon XL 93 CRI 3K Wide Beam L3 Black	33	2802	85	3000	800	93	50	50,000
2059689	Beacon XL 93 CRI 3K Wide Beam L3 White	33	2802	85	3000	800	93	50	50,000
Switch DIM									
2059678	Beacon XL 93 CRI 3K Narrow Beam L3 On-Board DIM Black	33	3103	94	3000	850	93	15	50,000
2059679	Beacon XL 93 CRI 3K Narrow Beam L3 On-Board DIM White	33	3103	94	3000	850	93	15	50,000
2059684	Beacon XL 93 CRI 3K Medium Beam L3 On-Board DIM Black	33	3060	93	3000	850	93	34	50,000
2059685	Beacon XL 93 CRI 3K Medium Beam L3 On-Board DIM White	33	3060	93	3000	850	93	34	50,000
2059690	Beacon XL 93 CRI 3K Wide Beam L3 On-Board DIM Black	33	2802	85	3000	850	93	50	50,000
2059691	Beacon XL 93 CRI 3K Wide Beam L3 On-Board DIM White	33	2802	85	3000	850	93	50	50,000
DALI									
2059680	Beacon XL 93 CRI 3K Narrow Beam L3+DALI Black	33	3103	94	3000	800	93	15	50,000
2059681	Beacon XL 93 CRI 3K Narrow Beam L3+DALI White	33	3103	94	3000	800	93	15	50,000
2059686	Beacon XL 93 CRI 3K Medium Beam L3+DALI Black	33	3060	93	3000	800	93	34	50,000
2059687	Beacon XL 93 CRI 3K Medium Beam L3+DALI White	33	3060	93	3000	800	93	34	50,000
2059692	Beacon XL 93 CRI 3K Wide Beam L3+DALI Black	33	2802	85	3000	800	93	50	50,000
2059693	Beacon XL 93 CRI 3K Wide Beam L3+DALI White	33	2802	85	3000	800	93	50	50,000
Beacon LED XL 4000K									
2059694	Beacon XL 93 CRI 4K Narrow Beam L3 Black	33	3312	100	4000	800	93	15	50,000
2059695	Beacon XL 93 CRI 4K Narrow Beam L3 White	33	3312	100	4000	800	93	15	50,000
2059700	Beacon XL 93 CRI 4K Medium Beam L3 Black	33	3314	100	4000	800	93	34	50,000
2059701	Beacon XL 93 CRI 4K Medium Beam L3 White	33	3314	100	4000	800	93	34	50,000
2059706	Beacon XL 93 CRI 4K Wide Beam L3 Black	33	3033	92	4000	800	93	50	50,000
2059707	Beacon XL 93 CRI 4K Wide Beam L3 White	33	3033	92	4000	800	93	50	50,000
Switch DIM									
2059696	Beacon XL 93 CRI 4K Narrow Beam L3 On-Board DIM Black	33	3312	100	4000	850	93	15	50,000
2059697	Beacon XL 93 CRI 4K Narrow Beam L3 On-Board DIM White	33	3312	100	4000	850	93	15	50,000
2059702	Beacon XL 93 CRI 4K Medium Beam L3 On-Board DIM Black	33	3314	100	4000	850	93	34	50,000
2059703	Beacon XL 93 CRI 4K Medium Beam L3 On-Board DIM White	33	3314	100	4000	850	93	34	50,000
2059708	Beacon XL 93 CRI 4K Wide Beam L3 On-Board DIM Black	33	3033	92	4000	850	93	50	50,000
2059709	Beacon XL 93 CRI 4K Wide Beam L3 On-Board DIM White	33	3033	92	4000	850	93	50	50,000
DALI									
2059698	Beacon XL 93 CRI 4K Narrow Beam L3+DALI Black	33	3312	100	4000	800	93	15	50,000
2059699	Beacon XL 93 CRI 4K Narrow Beam L3+DALI White	33	3312	100	4000	800	93	15	50,000
2059704	Beacon XL 93 CRI 4K Medium Beam L3+DALI Black	33	3314	100	4000	800	93	34	50,000
2059705	Beacon XL 93 CRI 4K Medium Beam L3+DALI White	33	3314	100	4000	800	93	34	50,000
2059710	Beacon XL 93 CRI 4K Wide Beam L3+DALI Black	33	3033	92	4000	800	93	50	50,000
2059711	Beacon XL 93 CRI 4K Wide Beam L3+DALI White	33	3033	92	4000	800	93	50	50,000
Beacon LED XL 3000K - high output									
2059712	Beacon XL 85CRI 3K Narrow Beam L3 Black	33	3805	115	3000	800	85	15	50,000
2059713	Beacon XL 85CRI 3K Narrow Beam L3 White	33	3805	115	3000	800	85	15	50,000
2059714	Beacon XL 85CRI 3K Medium Beam L3 Black	33	3744	113	3000	800	85	34	50,000
2059715	Beacon XL 85CRI 3K Medium Beam L3 White	33	3744	113	3000	800	85	34	50,000
2059716	Beacon XL 85CRI 3K Wide Beam L3 Black	33	3479	105	3000	800	85	50	50,000
2059717	Beacon XL 85CRI 3K Wide Beam L3 White	33	3479	105	3000	800	85	50	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED XL 4000K - high output									
2059718	Beacon XL 85CRI 4K Narrow Beam L3 Black	33	3911	119	4000	800	85	15	50,000
2059719	Beacon XL 85CRI 4K Narrow Beam L3 White	33	3911	119	4000	800	85	15	50,000
2059720	Beacon XL 85CRI 4K Medium Beam L3 Black	33	3912	119	4000	800	85	34	50,000
2059721	Beacon XL 85CRI 4K Medium Beam L3 White	33	3912	119	4000	800	85	34	50,000
2059722	Beacon XL 85CRI 4K Wide Beam L3 Black	33	3682	112	4000	800	85	50	50,000
2059723	Beacon XL 85CRI 4K Wide Beam L3 White	33	3682	112	4000	800	85	50	50,000
Beacon LED XXL 3000K									
2092990	Beacon XXL Narrow Beam 3K L3 Black	48	3713	77.35	3000	1200	93	21	50,000
2092991	Beacon XXL Narrow Beam 3K L3 White	48	3713	77.35	3000	1200	93	21	50,000
2093004	Beacon XXL Medium Beam 3K L3 Black	48	3670	76.46	3000	1200	93	50	50,000
2093005	Beacon XXL Medium Beam 3K L3 White	48	3670	76.46	3000	1200	93	50	50,000
2093018	Beacon XXL Wide Beam 3K L3 Black	48	4355	90.73	3000	1200	93	67	50,000
2093019	Beacon XXL Wide Beam 3K L3 White	48	4355	90.73	3000	1200	93	67	50,000
Swith DIM									
2092992	Beacon XXL Narrow Beam On-Board DIM 3K L3 Black	48	3713	77.35	3000	1200	93	21	50,000
2092993	Beacon XXL Narrow Beam On-Board DIM 3K L3 White	48	3713	77.35	3000	1200	93	21	50,000
2093006	Beacon XXL Medium Beam On-Board DIM 3K L3 Black	48	3670	76.46	3000	1200	93	50	50,000
2093007	Beacon XXL Medium Beam On-Board DIM 3K L3 White	48	3670	76.46	3000	1200	93	50	50,000
2093020	Beacon XXL Wide Beam On-Board DIM 3K L3 Black	48	4355	90.73	3000	1200	93	67	50,000
2093021	Beacon XXL Wide Beam On-Board DIM 3K L3 White	48	4355	90.73	3000	1200	93	67	50,000
DALI									
2092994	Beacon XXL Narrow Beam DALI 3K L3 Black	48	3713	77.35	3000	1200	93	21	50,000
2092995	Beacon XXL Narrow Beam DALI 3K L3 White	48	3713	77.35	3000	1200	93	21	50,000
2093008	Beacon XXL Medium Beam DALI 3K L3 Black	48	3670	76.46	3000	1200	93	50	50,000
2093009	Beacon XXL Medium Beam DALI 3K L3 White	48	3670	76.46	3000	1200	93	50	50,000
2093022	Beacon XXL Wide Beam DALI 3K L3 Black	48	4355	90.73	3000	1200	93	67	50,000
2093023	Beacon XXL Wide Beam DALI 3K L3 White	48	4355	90.73	3000	1200	93	67	50,000
Beacon LED XXL 4000K									
2093032	Beacon XXL Narrow Beam 4K L3 Black	48	4181	87.1	4000	1200	93	21	50,000
2093033	Beacon XXL Narrow Beam 4K L3 White	48	4181	87.1	4000	1200	93	21	50,000
2093046	Beacon XXL Medium Beam 4K L3 Black	48	4179	87.06	4000	1200	93	50	50,000
2093047	Beacon XXL Medium Beam 4K L3 White	48	4179	87.06	4000	1200	93	50	50,000
2093060	Beacon XXL Wide Beam 4K L3 Black	48	4884	101.75	4000	1200	93	67	50,000
2093061	Beacon XXL Wide Beam 4K L3 White	48	4884	101.75	4000	1200	93	67	50,000
Switch DIM									
2093034	Beacon XXL Narrow Beam On-Board DIM 4K L3 Black	48	4181	87.1	4000	1200	93	21	50,000
2093035	Beacon XXL Narrow Beam On-Board DIM 4K L3 White	48	4181	87.1	4000	1200	93	21	50,000
2093048	Beacon XXL Medium Beam On-Board DIM 4K L3 Black	48	4179	87.06	4000	1200	93	50	50,000
2093049	Beacon XXL Medium Beam On-Board DIM 4K L3 White	48	4179	87.06	4000	1200	93	50	50,000
2093062	Beacon XXL Wide Beam On-Board DIM 4K L3 Black	48	4884	101.75	4000	1200	93	67	50,000
2093063	Beacon XXL Wide Beam On-Board DIM 4K L3 White	48	4884	101.75	4000	1200	93	67	50,000
DALI									
2093036	Beacon XXL Narrow Beam DALI 4K L3 Black	48	4181	87.1	4000	1200	93	21	50,000
2093037	Beacon XXL Narrow Beam DALI 4K L3 White	48	4181	87.1	4000	1200	93	21	50,000
2093050	Beacon XXL Medium Beam DALI 4K L3 Black	48	4179	87.06	4000	1200	93	50	50,000
2093051	Beacon XXL Medium Beam DALI 4K L3 White	48	4179	87.06	4000	1200	93	50	50,000
2093064	Beacon XXL Wide Beam DALI 4K L3 Black	48	4884	101.75	4000	1200	93	67	50,000
2093065	Beacon XXL Wide Beam DALI 4K L3 White	48	4884	101.75	4000	1200	93	67	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED XL 3000K - high output									
2059307	Beacon XXL Narrow Beam HO 3K L3 Black	48	4351	90.65	3000	1200	85	21	50,000
2059308	Beacon XXL Narrow Beam HO 3K L3 White	48	4351	90.65	3000	1200	85	21	50,000
2059311	Beacon XXL Medium Beam HO 3K L3 Black	48	4269	88.94	3000	1200	85	50	50,000
2059312	Beacon XXL Medium Beam HO 3K L3 White	48	4269	88.94	3000	1200	85	50	50,000
2059315	Beacon XXL Wide Beam HO 3K L3 Black	48	5118	106.62	3000	1200	85	67	50,000
2059316	Beacon XXL Wide Beam HO 3K L3 White	48	5118	106.62	3000	1200	85	67	50,000
Beacon LED XL 4000K - high output									
2059309	Beacon XXL Narrow Beam HO 4K L3 Black	48	5128	106.83	4000	1200	85	21	50,000
2059310	Beacon XXL Narrow Beam HO 4K L3 White	48	5128	106.83	4000	1200	85	21	50,000
2059313	Beacon XXL Medium Beam HO 4K L3 Black	48	4884	101.75	4000	1200	85	50	50,000
2059314	Beacon XXL Medium Beam HO 4K L3 White	48	4884	101.75	4000	1200	85	50	50,000
2059317	Beacon XXL Wide Beam HO 4K L3 Black	48	5762	120.04	4000	1200	85	67	50,000
2059318	Beacon XXL Wide Beam HO 4K L3 White	48	5762	120.04	4000	1200	85	67	50,000

Concord Beacon LED Accent & XL

Product information

Product overview on page 37

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED Accent – 3000K - Lytespan 1									
2059544	Beacon Accent 97CRI 3K Narrow Beam L1 On-Board DIM Black	21	503	24	3000	500	97	10	50,000
2059545	Beacon Accent 97CRI 3K Narrow Beam L1 On-Board DIM White	21	503	24	3000	500	169	10	50,000
2059546	Beacon Accent 97CRI 3K Medium Beam L1 On-Board DIM Black	21	1410	67	3000	500	169	37	50,000
2059547	Beacon Accent 97CRI 3K Medium Beam L1 On-Board DIM White	21	1410	67	3000	500	169	37	50,000
2059548	Beacon Accent 97CRI 3K Wide Beam L1 On-Board DIM Black	21	1451	69	3000	500	169	52	50,000
2059549	Beacon Accent 97CRI 3K Wide Beam L1 On-Board DIM White	21	1451	69	3000	500	169	52	50,000
3000K - Lytespan 3									
2059556	Beacon Accent 97CRI 3K Narrow Beam L3 On-Board DIM Black	21	503	24	3000	500	190	10	50,000
2059557	Beacon Accent 97CRI 3K Narrow Beam L3 On-Board DIM White	21	503	24	3000	500	190	10	50,000
2059558	Beacon Accent 97CRI 3K Medium Beam L3 On-Board DIM Black	21	1410	67	3000	500	190	37	50,000
2059559	Beacon Accent 97CRI 3K Medium Beam L3 On-Board DIM White	21	1410	67	3000	500	190	37	50,000
2059560	Beacon Accent 97CRI 3K Wide Beam L3 On-Board DIM Black	21	1451	69	3000	500	190	52	50,000
2059561	Beacon Accent 97CRI 3K Wide Beam L3 On-Board DIM White	21	1451	69	3000	500	190	52	50,000
4000K - Lytespan 1									
2059550	Beacon Accent 97CRI 4K Narrow Beam L1 On-Board DIM Black	21	576	27	4000	500	169	10	50,000
2059551	Beacon Accent 97CRI 4K Narrow Beam L1 On-Board DIM White	21	576	27	4000	500	169	10	50,000
2059552	Beacon Accent 97CRI 4K Medium Beam L1 On-Board DIM Black	21	1528	73	4000	500	169	37	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
2059553	Beacon Accent 97CRI 4K Medium Beam L1 On-Board DIM White	21	1528	73	4000	500	169	37	50,000
2059554	Beacon Accent 97CRI 4K Wide Beam L1 On-Board DIM Black	21	1578	75	4000	500	169	52	50,000
2059555	Beacon Accent 97CRI 4K Wide Beam L1 On-Board DIM White	21	1578	75	4000	500	169	52	50,000
4000K - Lytespan 3									
2059562	Beacon Accent 97CRI 4K Narrow Beam L3 On-Board DIM Black	21	576	27	4000	500	190	10	50,000
2059563	Beacon Accent 97CRI 4K Narrow Beam L3 On-Board DIM White	21	576	27	4000	500	190	10	50,000
2059564	Beacon Accent 97CRI 4K Medium Beam L3 On-Board DIM Black	21	1528	73	4000	500	190	37	50,000
2059565	Beacon Accent 97CRI 4K Medium Beam L3 On-Board DIM White	21	1528	73	4000	500	190	37	50,000
2059566	Beacon Accent 97CRI 4K Wide Beam L3 On-Board DIM Black	21	1578	75	4000	500	190	52	50,000
2059567	Beacon Accent 97CRI 4K Wide Beam L3 On-Board DIM White	21	1578	75	4000	500	190	52	50,000
Beacon LED XL Accent – 3000K - Lytespan 3									
2059568	Beacon XL Accent 97CRI 3K Narrow Beam L3 On-Board DIM Black	33	1675	51	3000	850	205	14	50,000
2059569	Beacon XL Accent 97CRI 3K Narrow Beam L3 On-Board DIM White	33	1675	51	3000	850	205	14	50,000
2059570	Beacon XL Accent 97CRI 3K Medium Beam L3 On-Board DIM Black	33	2428	74	3000	850	205	33	50,000
2059571	Beacon XL Accent 97CRI 3K Medium Beam L3 On-Board DIM White	33	2428	74	3000	850	205	33	50,000
2059572	Beacon XL Accent 97CRI 3K Wide Beam L3 On-Board DIM Black	33	2275	69	3000	850	205	44	50,000
2059573	Beacon XL Accent 97CRI 3K Wide Beam L3 On-Board DIM White	33	2275	69	3000	850	205	44	50,000
4000K - Lytespan 3									
2059574	Beacon XL Accent 97CRI 4K Medium Beam L3 On-Board DIM Black	33	2668	80.84	4000	850	205	33	50,000
2059575	Beacon XL Accent 97CRI 4K Medium Beam L3 On-Board DIM White	33	2668	80.84	4000	850	205	33	50,000
2059576	Beacon XL Accent 97CRI 4K Narrow Beam L3 On-Board DIM Black	33	1827	55.36	4000	850	205	14	50,000
2059577	Beacon XL Accent 97CRI 4K Narrow Beam L3 On-Board DIM White	33	1827	55.36	4000	850	205	14	50,000
2059578	Beacon XL Accent 97CRI 4K Wide Beam L3 On-Board DIM Black	33	2478	75.09	4000	850	205	44	50,000
2059579	Beacon XL Accent 97CRI 4K Wide Beam L3 On-Board DIM White	33	2478	75.09	4000	850	205	44	50,000

Concord Beacon LED Muse & XL

Product information

Product overview on page 38

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED Muse II 3000K - Lytespan 1									
2059730	Beacon LED Muse II 97CRI 3000K L1 Trailing Edge Black	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059731	Beacon LED Muse II 97CRI 3000K L1 Trailing Edge White	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059732	Beacon LED Muse II 97CRI 3000K L1 On-Board DIM Black	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059733	Beacon LED Muse II 97CRI 3000K L1 On-Board DIM White	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059734	Beacon LED Muse II 97CRI 3000K L1 SSC01 Black	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059735	Beacon LED Muse II 97CRI 3000K L1 SSC01 White	21	553/1081	52	3000	500	97	8°- 55°	50,000
Beacon LED Muse II 3000K - Lytespan 3									
2059742	Beacon LED Muse II 97CRI 3000K L3 Trailing Edge Black	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059743	Beacon LED Muse II 97CRI 3000K L3 Trailing Edge White	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059744	Beacon LED Muse II 97CRI 3000K L3 On-Board DIM Black	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059745	Beacon LED Muse II 97CRI 3000K L3 On-Board DIM White	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059746	Beacon LED Muse II 97CRI 3000K L3+DALI Black	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059747	Beacon LED Muse II 97CRI 3000K L3+DALI White	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059748	Beacon LED Muse II 97CRI 3000K L3 SSC01 Black	21	553/1081	52	3000	500	97	8°- 55°	50,000
2059749	Beacon LED Muse II 97CRI 3000K L3 SSC01 White	21	553/1081	52	3000	500	97	8°- 55°	50,000

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Beam angle (°)	Lifetime (hours)
Beacon LED Muse II 4000K - Lytespan 1									
2059736	Beacon LED Muse II 97CRI 4000K L1 Trailing Edge Black	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059737	Beacon LED Muse II 97CRI 4000K L1 Trailing Edge White	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059738	Beacon LED Muse II 97CRI 4000K L1 On-Board DIM Black	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059739	Beacon LED Muse II 97CRI 4000K L1 On-Board DIM White	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059740	Beacon LED Muse II 97CRI 4000K L1 SSC01 Black	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059741	Beacon LED Muse II 97CRI 4000K L1 SSC01 White	21	623/1150	55	4000	500	97	8°- 55°	50,000
Beacon LED Muse II 4000K - Lytespan 3									
2059750	Beacon LED Muse II 97CRI 4000K L3 Trailing Edge Black	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059751	Beacon LED Muse II 97CRI 4000K L3 Trailing Edge White	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059752	Beacon LED Muse II 97CRI 4000K L3 On-Board DIM Black	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059753	Beacon LED Muse II 97CRI 4000K L3 On-Board DIM White	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059754	Beacon LED Muse II 97CRI 4000K L3+DALI Black	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059755	Beacon LED Muse II 97CRI 4000K L3+DALI White	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059756	Beacon LED Muse II 97CRI 4000K L3 SSC01 Black	21	623/1150	55	4000	500	97	8°- 55°	50,000
2059757	Beacon LED Muse II 97CRI 4000K L3 SSC01 White	21	623/1150	55	4000	500	97	8°- 55°	50,000
Beacon LED XL Muse 3000K									
2059319	Beacon XL Muse 3K On-Board DIM L3 White	41	2544	62	3000	1050	97	10°- 70°	50,000
2059320	Beacon XL Muse 3K On-Board DIM L3 Black	41	2544	62	3000	1050	97	10°- 70°	50,000
2059323	Beacon XL Muse 3K DALI L3 White	41	2544	62	3000	1050	97	10°- 70°	50,000
2059324	Beacon XL Muse 3K DALI L3 Black	41	2544	62	3000	1050	97	10°- 70°	50,000
2059327	Beacon XL Muse 3K SSC01 L3 White	41	2544	62	3000	1050	97	10°- 70°	50,000
2059328	Beacon XL Muse 3K SSC01 L3 Black	41	2544	62	3000	1050	97	10°- 70°	50,000
Beacon LED XL Muse 4000K									
2059321	Beacon XL Muse 4K On-Board DIM L3 White	41	2884	70	4000	1050	97	10°- 70°	50,000
2059322	Beacon XL Muse 4K On-Board DIM L3 Black	41	2884	70	4000	1050	97	10°- 70°	50,000
2059325	Beacon XL Muse 4K DALI L3 White	41	2884	70	4000	1050	97	10°- 70°	50,000
2059326	Beacon XL Muse 4K DALI L3 Black	41	2884	70	4000	1050	97	10°- 70°	50,000
2059329	Beacon XL Muse 4K SSC01 L3 White	41	2884	70	4000	1050	97	10°- 70°	50,000
2059330	Beacon XL Muse 4K SSC01 L3 Black	41	2884	70	4000	1050	97	10°- 70°	50,000
Beacon Muse Xicato®									
2059776	Beacon Muse Xicato® 3500K On-Board DIM LS3 Black	20	369/641	33	3500	700	98	8°-52°	50,000
2059777	Beacon Muse Xicato® 3500K On-Board DIM LS3 White	20	369/641	33	3500	700	98	8°-52°	50,000
2059796	Beacon Muse Xicato® 3K On-Board DIM LS3 Black	20	338/598	30	3000	700	98	8°-52°	50,000
2059797	Beacon Muse Xicato® 3K On-Board DIM LS3 White	20	338/598	30	3000	700	98	8°-52°	50,000
2059798	Beacon Muse Xicato® 4K On-Board DIM LS3 Black	20	395/698	35	4000	700	98	8°-52°	50,000
2059799	Beacon Muse Xicato® 4K On-Board DIM LS3 White	20	395/698	35	4000	700	98	8°-52°	50,000
Beacon XL Muse Xicato®									
2059778	Beacon XL Muse Xicato® 3500K On-Board DIM LS3 White	35	668/1741	50	3500	1050	98	10°- 72°	50,000
2059779	Beacon XL Muse Xicato® 3500K On-Board DIM LS3 Black	35	668/1741	50	3500	1050	98	10°- 72°	50,000
2059896	Beacon XL Muse Xicato® 3K On-Board DIM LS3 White	35	547/1430	41	3000	1050	98	10°- 72°	50,000
2059897	Beacon XL Muse Xicato® 3K On-Board DIM LS3 Black	35	547/1430	41	3000	1050	98	10°- 72°	50,000
2059898	Beacon XL Muse Xicato® 4K On-Board DIM LS3 White	35	681/1697	48	4000	1050	98	10°- 72°	50,000
2059899	Beacon XL Muse Xicato® 4K On-Board DIM LS3 Black	35	681/1697	48	4000	1050	98	10°- 72°	50,000

Concord Beacon Muse Tune II & XL II

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	CRI	Beam angle (°)	Lifetime (hours)
Beacon Muse Tune II								
2059966	Beacon Muse Tune II LS3 On-Board Black	18	100/165	-	1800-6500	90	8°- 42°	35,000
2059967	Beacon Muse Tune II LS3 On-Board White	18	100/165	-	1800-6500	90	8°- 42°	35,000
2059968	Beacon Muse Tune II LS3 DALI Black	18	100/165	-	1800-6500	90	8°- 42°	35,000
2059969	Beacon Muse Tune II LS3 DALI White	18	100/165	-	1800-6500	90	8°- 42°	35,000
2059970	Beacon Muse Tune II LS3 SSC01 Black	18	100/165	-	1800-6500	90	8°- 42°	35,000
2059971	Beacon Muse Tune II LS3 SSC01 White	18	100/165	-	1800-6500	90	8°- 42°	35,000
Beacon Tune II - Spot								
2059261	Beacon Tune II Spot On-Board LS3 White	19	1008	53	1800-6500	90	27	35,000
2059262	Beacon Tune II Spot On-Board LS3 Black	19	1008	53	1800-6500	90	27	35,000
2059265	Beacon Tune II Spot DALI LS3 White	19	1008	53	1800-6500	90	27	35,000
2059266	Beacon Tune II Spot DALI LS3 Black	19	1008	53	1800-6500	90	27	35,000
2059269	Beacon Tune II Spot SSC01 LS3 White	19	1008	53	1800-6500	90	27	35,000
2059270	Beacon Tune II Spot SSC01 LS3 Black	19	1008	53	1800-6500	90	27	35,000
Beacon Tune II - Flood								
2059263	Beacon Tune II Flood On-Board LS3 White	19	840	44	1800-6500	90	45	35,000
2059264	Beacon Tune II Flood On-Board LS3 Black	19	840	44	1800-6500	90	45	35,000
2059267	Beacon Tune II Flood DALI LS3 White	19	840	44	1800-6500	90	45	35,000
2059268	Beacon Tune II Flood DALI LS3 Black	19	840	44	1800-6500	90	45	35,000
2059271	Beacon Tune II Flood SSC01 LS3 White	19	840	44	1800-6500	90	45	35,000
2059272	Beacon Tune II Flood SSC01 LS3 Black	19	840	44	1800-6500	90	45	35,000
Beacon XL Tune II - Narrow								
2059980	Beacon XL Tune II Narrow Beam On-Board LS3 White	33	2207	67	1800-6500	90	22	35,000
2059981	Beacon XL Tune II Narrow Beam On-Board LS3 Black	33	2207	67	1800-6500	90	22	35,000
2059982	Beacon XL Tune II Narrow Beam DALI LS3 White	33	2207	67	1800-6500	90	22	35,000
2059983	Beacon XL Tune II Narrow Beam DALI LS3 Black	33	2207	67	1800-6500	90	22	35,000
2059984	Beacon XL Tune II Narrow Beam SSC01 LS3 White	33	2207	67	1800-6500	90	22	35,000
2059985	Beacon XL Tune II Narrow Beam SSC01 LS3 Black	33	2207	67	1800-6500	90	22	35,000
Beacon XL Tune II - Medium								
2059986	Beacon XL Tune II Medium Beam On-Board LS3 White	33	2027	61	1800-6500	90	32	35,000
2059987	Beacon XL Tune II Medium Beam On-Board LS3 Black	33	2027	61	1800-6500	90	32	35,000
2059988	Beacon XL Tune II Medium Beam DALI LS3 White	33	2027	61	1800-6500	90	32	35,000
2059989	Beacon XL Tune II Medium Beam DALI LS3 Black	33	2027	61	1800-6500	90	32	35,000
2059990	Beacon XL Tune II Medium Beam SSC01 LS3 White	33	2027	61	1800-6500	90	32	35,000
2059991	Beacon XL Tune II Medium Beam SSC01 LS3 Black	33	2027	61	1800-6500	90	32	35,000
Beacon XL Tune II - Wide								
2059992	Beacon XL Tune II Wide Beam On-Board LS3 White	33	1773	54	1800-6500	90	39	35,000
2059993	Beacon XL Tune II Wide Beam On-Board LS3 Black	33	1773	54	1800-6500	90	39	35,000
2059994	Beacon XL Tune II Wide Beam DALI LS3 White	33	1773	54	1800-6500	90	39	35,000
2059995	Beacon XL Tune II Wide Beam DALI LS3 Black	33	1773	54	1800-6500	90	39	35,000
2059996	Beacon XL Tune II Wide Beam SSC01 LS3 White	33	1773	54	1800-6500	90	39	35,000
2059997	Beacon XL Tune II Wide Beam SSC01 LS3 Black	33	1773	54	1800-6500	90	39	35,000

Concord Beacon Projector

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Lifetime (hours)
3000K – DALI								
2055964	Beacon LED Framing Projector DALI 3000K Three Circuit Track - White	35	474	14	3000	900	97	72,000
2055965	Beacon LED Framing Projector DALI 3000K Three Circuit Track - Black	35	474	14	3000	900	97	72,000
2055952	Beacon LED Gobo Projector DALI 3000K Three Circuit Track - White	35	474	14	3000	900	97	72,000
2055953	Beacon LED Gobo Projector DALI 3000K Three Circuit Track - Black	35	474	14	3000	900	97	72,000
2055976	Beacon LED Iris Projector DALI 3000K Three Circuit Track - White	35	474	14	3000	900	97	72,000
2055977	Beacon LED Iris Projector DALI 3000K Three Circuit Track - Black	35	474	14	3000	900	97	72,000
Switch DIM								
2055956	Beacon LED Framing Projector O/B 3000K Three Circuit Track - White	35	474	14	3000	900	97	72,000
2055957	Beacon LED Framing Projector O/B 3000K Three Circuit Track - Black	35	474	14	3000	900	97	72,000
2055944	Beacon LED Gobo Projector O/B 3000K Three Circuit Track - White	35	474	14	3000	900	97	72,000
2055945	Beacon LED Gobo Projector O/B 3000K Three Circuit Track - Black	35	474	14	3000	900	97	72,000
2055968	Beacon LED Iris Projector O/B 3000K Three Circuit Track - White	35	474	14	3000	900	97	72,000
2055969	Beacon LED Iris Projector O/B 3000K Three Circuit Track - Black	35	474	14	3000	900	97	72,000
Surface – Switch DIM								
2055960	Beacon LED Framing Projector O/B 3000K Surface Mounted - White	35	474	14	3000	900	97	72,000
2055961	Beacon LED Framing Projector O/B 3000K Surface Mounted - Black	35	474	14	3000	900	97	72,000
2055948	Beacon LED Gobo Projector O/B 3000K Surface Mounted - White	35	474	14	3000	900	97	72,000
2055949	Beacon LED Gobo Projector O/B 3000K Surface Mounted - Black	35	474	14	3000	900	97	72,000
2055972	Beacon LED Iris Projector O/B 3000K Surface Mounted - White	35	474	14	3000	900	97	72,000
2055973	Beacon LED Iris Projector O/B 3000K Surface Mounted - Black	35	474	14	3000	900	97	72,000
4000K – DALI								
2055966	Beacon LED Framing Projector DALI 4000K Three Circuit Track - White	35	474	14	4000	900	97	72,000
2055967	Beacon LED Framing Projector DALI 4000K Three Circuit Track - Black	35	474	14	4000	900	97	72,000
2055954	Beacon LED Gobo Projector DALI 4000K Three Circuit Track - White	35	474	14	4000	900	97	72,000
2055955	Beacon LED Gobo Projector DALI 4000K Three Circuit Track - Black	35	474	14	4000	900	97	72,000
2055978	Beacon LED Iris Projector DALI 4000K Three Circuit Track - White	35	474	14	4000	900	97	72,000
2055979	Beacon LED Iris Projector DALI 4000K Three Circuit Track - Black	35	474	14	4000	900	97	72,000
Switch DIM								
2055958	Beacon LED Framing Projector O/B 4000K Three Circuit Track - White	35	474	14	4000	900	97	72,000
2055959	Beacon LED Framing Projector O/B 4000K Three Circuit Track - Black	35	474	14	4000	900	97	72,000
2055946	Beacon LED Gobo Projector O/B 4000K Three Circuit Track - White	35	474	14	4000	900	97	72,000
2055947	Beacon LED Gobo Projector O/B 4000K Three Circuit Track - Black	35	474	14	4000	900	97	72,000
2055970	Beacon LED Iris Projector O/B 4000K Three Circuit Track - White	35	474	14	4000	900	97	72,000
2055971	Beacon LED Iris Projector O/B 4000K Three Circuit Track - Black	35	474	14	4000	900	97	72,000
Surface – Switch DIM								
2055962	Beacon LED Framing Projector O/B 4000K Surface Mounted - White	35	474	14	4000	900	97	72,000
2055963	Beacon LED Framing Projector O/B 4000K Surface Mounted - Black	35	474	14	4000	900	97	72,000
2055950	Beacon LED Gobo Projector O/B 4000K Surface Mounted - White	35	474	14	4000	900	97	72,000
2055951	Beacon LED Gobo Projector O/B 4000K Surface Mounted - Black	35	474	14	4000	900	97	72,000
2055974	Beacon LED Iris Projector O/B 4000K Surface Mounted - White	35	474	14	4000	900	97	72,000
2055975	Beacon LED Iris Projector O/B 4000K Surface Mounted - Black	35	474	14	4000	900	97	72,000

Concord Beacon LED Wallwasher

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Lifetime (hours)
Standard – 3000K								
2059065	Beacon Wallwash LED 3K L3 Black	48	3823	80	3000	1200	93	50,000
2059066	Beacon Wallwash LED 3K L3 White	48	3823	80	3000	1200	93	50,000
2059067	Beacon Wallwash LED On-Board DIM 3K L3 Black	48	3823	80	3000	1200	93	50,000
2059068	Beacon Wallwash LED On-Board DIM 3K L3 White	48	3823	80	3000	1200	93	50,000
2059073	Beacon Wallwash LED DALI 3K L3 Black	48	3823	80	3000	1200	93	50,000
2059074	Beacon Wallwash LED DALI 3K L3 White	48	3823	80	3000	1200	93	50,000
4000K								
2059080	Beacon Wallwash LED 4K L3 Black	48	4089	85	4000	1200	93	50,000
2059081	Beacon Wallwash LED 4K L3 White	48	4089	85	4000	1200	93	50,000
2059087	Beacon Wallwash LED On-Board DIM 4K L3 Black	48	4089	85	4000	1200	93	50,000
2059088	Beacon Wallwash LED On-Board DIM 4K L3 White	48	4089	85	4000	1200	93	50,000
2059094	Beacon Wallwash LED DALI 4K L3 Black	48	4089	85	4000	1200	93	50,000
2059095	Beacon Wallwash LED DALI 4K L3 White	48	4089	85	4000	1200	93	50,000
High output – 3000K								
2059101	Beacon Wallwash LED HO 3K L3 Black	48	4625	96	3000	1200	85	50,000
2059102	Beacon Wallwash LED HO 3K L3 White	48	4625	96	3000	1200	85	50,000
4000K								
2059108	Beacon Wallwash LED HO 4K L3 Black	48	4916	102	4000	1200	85	50,000
2059109	Beacon Wallwash LED HO 4K L3 White	48	4916	102	4000	1200	85	50,000

Concord Beacon LED Shelf

Product information

Code	Description	Total System power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Drive current (mA)	CRI	Lifetime (hours)
3000K								
2093073	Beacon Shelf 3K L3 BLK	48	4091	85	3000	1200	93	50,000
2093074	Beacon Shelf 3K L3 WHT	48	4091	85	3000	1200	93	50,000
2093075	Beacon Shelf 3K DALI L3 BLK	48	4091	85	3000	1200	93	50,000
2093076	Beacon Shelf 3K DALI L3 WHT	48	4091	85	3000	1200	93	50,000
4000K								
2093077	Beacon Shelf 4K L3 BLK	48	4485	93	4000	1200	93	50,000
2093078	Beacon Shelf 4K L3 WHT	48	4485	93	4000	1200	93	50,000
2093079	Beacon Shelf 4K DALI L3 BLK	48	4485	93	4000	1200	93	50,000
2093080	Beacon Shelf 4K DALI L3 WHT	48	4485	93	4000	1200	93	50,000

Product overview on page 46

Product overview on page 47

Product information

Code	Description	Colour	Polarity ridge	Length (mm)
Lytespan 1 Circuit – Track Unit				
2036015	Lytespan 1 single circuit - 1m - standard track unit - white	White	Universal	1000
2036016	Lytespan 1 single circuit - 2m - standard track unit - white	White	Universal	2000
2036017	Lytespan 1 single circuit - 3m - standard track unit - white	White	Universal	3000
2036018	Lytespan 1 single circuit - 1m - standard track unit - black	Black	Universal	1000
2036020	Lytespan 1 single circuit - 2m - standard track unit - black	Black	Universal	2000
2036021	Lytespan 1 single circuit - 3m - standard track unit - black	Black	Universal	3000
2046531	Lytespan 1 single circuit - 1m - standard track unit - silver	Silver	Universal	1000
2046532	Lytespan 1 single circuit - 2m - standard track unit - silver	Silver	Universal	2000
2046533	Lytespan 1 single circuit - 3m - standard track unit - silver	Silver	Universal	3000
Recessed Track Unit				
2036022	Lytespan 1 single circuit - 1m - recessed track unit - white	White	Universal	1000
2036023	Lytespan 1 single circuit - 2m - recessed track unit - white	White	Universal	2000
2036024	Lytespan 1 single circuit - 3m - recessed track unit - white	White	Universal	3000
Starter Track				
2036010	Lytespan 1 single circuit - 1m - starter track kit - white	White	Universal	1000
2036011	Lytespan 1 single circuit - 2m - starter track kit - white	White	Universal	2000
2036012	Lytespan 1 single circuit - 3m - starter track kit - white	White	Universal	3000
End Cup				
2007631	Lytespan 1 Display Hook			
2011283	Lytespan 1 End Cap - Black	Black		
2011345	Lytespan 1 End Cap - White	White		
2046538	Lytespan 1 End Cap - Silver	Silver		
3019550	Nanotrack / LS1 Pendant adaptor - White	White		
Coupler				
2011297	Lytespan 1 L Coupler - Black	Black	Universal	
2011299	Lytespan 1 T Coupler - Black	Black	Universal	
2011303	Lytespan 1 Straight Plug-in Coupler - White	White	Universal	
2011379	Lytespan 1 L Coupler - White	White	Universal	
2011381	Lytespan 1 T Coupler - White	White	Universal	
2011383	Lytespan 1 X Coupler - White	White	Universal	
2011835	Lytespan 1 Straight Plug-in Coupler - Black	Black	Universal	
2028064	Lytespan 1 Straight Plug-in Coupler - Silver	Silver	Universal	
2036027	Lytespan 1 Flexible Coupler - White	White	Universal	
2036028	Lytespan 1 Flexible Coupler - Black	Black	Universal	
2046535	Lytespan 1 L Coupler - Silver	Silver	Universal	
2046536	Lytespan 1 T Coupler - Silver	Silver	Universal	
2046539	Lytespan 1 Flexible Coupler - Silver	Silver	Universal	
Joiner Track				
2036013	Lytespan 1 Single circuit - Joiner Track - 2m - White	White	Universal	2000
2036014	Lytespan 1 Single circuit - Joiner Track - 3m - White	White	Universal	3000
Live Feed				
2011285	Lytespan 1 Plug-in Live Feed - Black	Black		
2011305	Lytespan 1 Push-up Live Feed - White	White		
2011348	Lytespan 1 Plug-in Live Feed - White	White		
2011833	Lytespan 1 Push-up Live Feed - Black	Black		

Product overview on page 48

Code	Description	Colour	Polarity ridge	Length (mm)
2028063	Lytespan 1 Push-up Live Feed - Silver	Silver		
2046534	Lytespan 1 Plug-in Live Feed - Silver	Silver		
Lytespan 1 LP Circuit – Joiner Track				
2019505	Lytespan LP single circuit - Joiner Track - 2m - White	White	Universal	2000
2019506	Lytespan LP single circuit - Joiner Track - 3m - White	White	Universal	3000
2025712	Lytespan LP single circuit - Joiner Track - 2m - Silver	Silver	Universal	2000
2025713	Lytespan LP single circuit - Joiner Track - 3m - Silver	Silver	Universal	3000
2046528	Lytespan LP single circuit - Joiner Track - 2m - Black	Black	Universal	2000
2046529	Lytespan LP single circuit - Joiner Track - 3m - Black	Black	Universal	3000
Starter Track				
2019502	Lytespan LP single circuit - Starter Track - 1m - White	White	Universal	1000
2019503	Lytespan LP single circuit - Starter Track - 2m - White	White	Universal	2000
2019504	Lytespan LP single circuit - Starter Track - 3m - White	White	Universal	3000
2025709	Lytespan LP single circuit - Starter Track - 1m - Silver	Silver	Universal	1000
2025710	Lytespan LP single circuit - Starter Track - 2m - Silver	Silver	Universal	2000
2025711	Lytespan LP single circuit - Starter Track - 3m - Silver	Silver	Universal	3000
2046525	Lytespan LP single circuit - Starter Track - 1m - Black	Black	Universal	1000
2046526	Lytespan LP single circuit - Starter Track - 2m - Black	Black	Universal	2000
2046527	Lytespan LP single circuit - Starter Track - 3m - Black	Black	Universal	3000
Couplers				
2025994	Lytespan LP Flexible Coupler - White	White	Universal	
2025995	Lytespan LP Flexible Coupler - Silver	Silver	Universal	
2046530	Lytespan LP Flexible Coupler - Black	Black	Universal	
Lytespan 3 – Starter Track Kit				
2030732	Lytespan 3 3-circuit - Starter Track - 1m - White	White	Universal	1000
2030733	Lytespan 3 3-circuit - Starter Track - 2m - White	White	Universal	2000
2030734	Lytespan 3 3-circuit - Starter Track - 3m - White	White	Universal	3000
2057410	Lytespan 3 3-circuit - Starter Track - 1m - Silver	Silver	Universal	1000
2057411	Lytespan 3 3-circuit - Starter Track - 2m - Silver	Silver	Universal	2000
2057412	Lytespan 3 3-circuit - Starter Track - 3m - Silver	Silver	Universal	3000
Joiner Track Kit				
2030736	Lytespan 3 3-circuit - Joiner Track - 3m - White	White	Universal	3000
DALI - Track Unit				
2020751	Lytespan 3 3-circuit - Standard Track - 3m - White	White	Universal	3000
2020759	Lytespan 3 3-circuit - Standard Track - 3m - Silver	Silver	Universal	3000
2020760	Lytespan 3 3-circuit - Standard Track - 1m - White	White	Universal	1000
2020761	Lytespan 3 3-circuit - Standard Track - 1m - Silver	Silver	Universal	1000
2020762	Lytespan 3 3-circuit - Standard Track - 2m - White	White	Universal	2000
2020763	Lytespan 3 3-circuit - Standard Track - 2m - Silver	Silver	Universal	2000
2025500	Lytespan 3 3-circuit - Standard Track - 1m - Black	Black	Universal	1000
2025501	Lytespan 3 3-circuit - Standard Track - 2m - Black	Black	Universal	2000
2025502	Lytespan 3 3-circuit - Standard Track - 3m - Black	Black	Universal	3000
DALI - Recessed Track Unit				
2020718	Lytespan 3 3-circuit - Recessed Track - 2m - White	White	Universal	2000
2020719	Lytespan 3 3-circuit - Recessed Track - 3m - White	White	Universal	3000
2025504	Lytespan 3 3-circuit - Recessed Track - 2m - Black	Black	Universal	2000
2025505	Lytespan 3 3-circuit - Recessed Track - 3m - Black	Black	Universal	3000
Pendant adaptor				
2019905	Lytespan 3 Pendant Adaptor - White	White		

Code	Description	Colour	Polarity ridge	Length (mm)
2019906	Lytespan 3 Pendant Adaptor - Black	Black		
	End cup			
2020789	Lytespan 3 End Cap - White	White		
2021317	Lytespan 3 End Cap - Silver	Silver		
2025517	Lytespan 3 End Cap - Black	Black		
	Live end			
2020790	Lytespan 3 Plug-in Live End - White	White		
2020799	Lytespan 3 Plug-in Live End for Recessed Tracks - White	White		
2021318	Lytespan 3 Plug-in Live End - Silver	Silver		
2025507	Lytespan 3 Plug-in Live End - Black	Black		
	Coupler			
2020792	Lytespan 3 L Coupler INSIDE - White	White	Inside	
2020793	Lytespan 3 L Coupler OUTSIDE - White	White	Outside	
2020794	Lytespan 3 X Coupler - White	White	Universal	
2020795	Lytespan 3 T Coupler LEFT - White	White	Left	
2020796	Lytespan 3 T Coupler RIGHT - White	White	Right	
2020797	Lytespan 3 Straight Coupler - White	White	Universal	
2020798	Lytespan 3 Flexible Corner Coupler - White	White	Universal	
2021310	Lytespan 3 Flexible Corner Coupler - Silver	Silver	Universal	
2021311	Lytespan 3 X Coupler - Silver	Silver	Universal	
2021312	Lytespan 3 T Coupler RIGHT - Silver	Silver	Right	
2021313	Lytespan 3 T Coupler LEFT - Silver	Silver	Left	
2021314	Lytespan 3 L Coupler OUTSIDE - Silver	Silver	Outside	
2021315	Lytespan 3 L Coupler INSIDE - Silver	Silver	Inside	
2025508	Lytespan 3 Straight Coupler - Black	Black	Universal	
2025511	Lytespan 3 L Coupler INSIDE - Black	Black	Inside	
2025512	Lytespan 3 L Coupler OUTSIDE - Black	Black	Outside	
2025513	Lytespan 3 T Coupler RIGHT - Black	Black	Right	
2025514	Lytespan 3 T Coupler LEFT - Black	Black	Left	
2025515	Lytespan 3 X Coupler - Black	Black	Universal	
2025516	Lytespan 3 Flexible Corner Coupler - Black	Black	Universal	
2027542	Lytespan 3 Straight Coupler - Silver	Silver	Universal	
	Display hook			
2025697	Lytespan 3 Display Hook - White	White		
	Live Feed			
2027546	Lytespan 3 Push-up Live Feed LEFT - White	White	Left	
2027547	Lytespan 3 Push-up Live Feed LEFT - Silver	Silver	Left	
2027548	Lytespan 3 Push-up Live Feed LEFT - Black	Black	Left	
2027549	Lytespan 3 Push-up Live Feed RIGHT - White	White	Right	
2027550	Lytespan 3 Push-up Live Feed RIGHT - Silver	Silver	Right	
2027551	Lytespan 3 Push-up Live Feed RIGHT - Black	Black	Right	

START eco Emergency

Product information

Code	Description	Total system power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Mounting	Duration	Mode of Operation	Testing
Start eco Emergency Bulkhead Ip65									
0032004	START eco Emergency Bulkhead Manual Test Maintained/Non Maintained 3h 170lm	3.5	170	49	5,500	Surface	3 hour	Maintaintd / Non Maintained	Manual
Start eco Emergency Exit									
0032000	START eco Emergency Exit Surface Manual Test Maintained 3h	0.5	-	-	-	Surface	3 hour	Maintaintd	Manual
0032001	START eco Emergency Exit Surface Suspended Manual Test Maintained 3h	0.5	-	-	-	Surface Suspended	3 hour	Maintaintd	Manual
Start eco Emergency Spot									
0032002	START eco Emergency Spot Manual Test Non Maintained 3h Open Area	1.3	170	131	6500	Recessed	3 hour	Non Maintaintd	Manual
0032003	START eco Emergency Spot Manual Test Non Maintained 3h Corridor	1.3	170	131	6500	Recessed	3 hour	Non Maintaintd	Manual

Concord SylSafe Spots

Product information

Code	Description	Total system power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Mounting	Duration	Mode of Operation	Testing
Spot RA recessed									
0041720	SylSafe Spot RA R EM3 NM MS	3	160	53	6300	Recessed	3 hours	Non-Maintained	Manual
0041721	SylSafe Spot RA R EM3 NM DA	3	160	53	6300	Recessed	3 hours	Non-Maintained	Autotest/DALI
0041722	SylSafe Spot RA R EMC NM MS	3	160	53	6300	Recessed	central battery	Non-Maintained	Manual
Spot HR Recessed									
0041726	SylSafe Spot HR R EM3 NM MS	4	300	75	6300	Recessed	3 hours	Non-Maintained	Manual
0041727	SylSafe Spot HR R EM3 NM DA	4	300	75	6300	Recessed	3 hours	Non-Maintained	Autotest/DALI
0041728	SylSafe Spot HR R EMC NM MS	4	300	75	6300	Recessed	central battery	Non-Maintained	Manual
Spot RA Surface									
0041729	SylSafe Spot RA C EM3 NM MS	1.8	145	81	6300	Surface mounted	3 hours	Non-Maintained	Manual
0041730	SylSafe Spot RA C EM3 NM DA	1.8	145	81	6300	Surface mounted	3 hours	Non-Maintained	Autotest/DALI
Xspot OA									
0041775	SylSafe XSpot OA R EM3 NM MS	2.8	80	29	5700	Recessed	3 hours	Non-Maintained	Manual
0041776	SylSafe XSpot OA R EM3 NM DA	2.8	80	29	5700	Recessed	3 hours	Non-Maintained	Autotest/DALI
0041777	SylSafe XSpot OA R EMC NM MS	2.2	80	36	5700	Recessed	Central battery	Non-Maintained	Manual

Concord SylSafe Exit Signs

Product information

Code	Description	Total system power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Mounting	Duration	Mode of Operation	Testing
EX C									
0041747	SylSafe Exit EX C EM3 MT MS	2.2	-	-	5700	Surface Mounted	3 hours	Maintained	Manual
0041748	SylSafe Exit EX C EM3 MT DA	2.2	-	-	5700	Surface Mounted	3 hours	Maintained	Autotest/DALI
MOD									
0041749	SylSafe Exit-Mod EX R EM3 MT MS	4.9	-	-	-	Recessed	3 hours	Maintained	Manual
0041750	SylSafe Exit-Mod EX R EM3 MT DA	4.9	-	-	-	Recessed	3 hours	Maintained	Autotest/DALI
0041751	SylSafe Exit-Mod EX R EMC MT MS	1.8	-	-	-	Recessed	Central Battery	Maintained	Manual
0041752	SylSafe Exit-Mod EX S EM3 MT MS	4.9	-	-	-	Suspended	3 hours	Maintained	Manual
0041753	SylSafe Exit-Mod EX S EM3 MT DA	4.9	-	-	-	Suspended	3 hours	Maintained	Autotest/DALI
0041754	SylSafe Exit-Mod EX S EMC MT MS	1.8	-	-	-	Suspended	Central Battery	Maintained	Manual
0041755	SylSafe Exit-Mod EX V EM3 MT MS	4.9	-	-	-	Ceiling mounted	3 hours	Maintained	Manual
0041756	SylSafe Exit-Mod EX V EM3 MT DA	4.9	-	-	-	Ceiling mounted	3 hours	Maintained	Autotest/DALI
0041757	SylSafe Exit-Mod EX V EMC MT MS	1.8	-	-	-	Ceiling mounted	Central Battery	Maintained	Manual
0041758	SylSafe Exit-Mod EX 9 EM3 MT MS	4.9	-	-	-	Wall mounted	3 hours	Maintained	Manual
0041759	SylSafe Exit-Mod EX 9 EM3 MT DA	4.9	-	-	-	Wall mounted	3 hours	Maintained	Autotest/DALI
0041760	SylSafe Exit-Mod EX 9 EMC MT MS	1.8	-	-	-	Wall mounted	Central Battery	Maintained	Manual
LED									
9144944	SylSafe IP65 LED M3	7	135	19	4000	Surface Mounted			
9153908	SylSafe IP65 LED Recessed With Exit Sign Arrow Down	6.5	135	21					
9154052	SylSafe IP65 LED M3 DALI/SELF TEST	7	135	19	4000	Surface Mounted			Autotest/DALI
9154091	SylSafe IP65 Arrow Down Sign								
9154205	SylSafe IP65 Arrow L/R Sign (BS5499)								
9154269	SylSafe IP65 Arrow L/R (EC)								
Surface and Suspended									
9144466	Surface LED Exit Sign White Arrow Down				4000				
9144945	Surface LED Exit Sign Silver Arrow Down				4000				
9154174	Surface LED Exit Sign White Arrow Up				4000				
9193736	Surface LED Exit Sign Silver Arrow Up				4000				
Accessories									
Code	Description								
0041772	SylSafe Exit Legend Pack EC								
0041773	SylSafe Exit Legend Pack ISO								
9144467	Wall Bracket For Exit Sign White								
9144579	Ceiling Bracket For Exit Sign White								
9144946	Wall Bracket for Exit Sign Silver								
9144947	Ceiling Bracket for Exit Sign Silver								
9154082	1m Wire Suspension Kit for Surface Exit Sign								

Concord SylSafe N-Light

Product information

Code	Description	Total system power consumption (W)	Mounting
0041774	N-Light Emergency Monitor	4.14	Wall recessed

Product overview on page 58

Concord SylSafe Bay

Product information

Code	Description	Total system power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Mounting	Duration	Mode of Operation	Testing
0041732	SylSafe Bay HB C EM3 NM MS	3	177		5700	Surface mounted	3 hours	Non-maintained	Manual
0041733	SylSafe Bay HB C EM3 NM DA	3	177		5700	Surface mounted	3 hours	Non-maintained	Autotest/DALI
0041734	SylSafe Bay HB C EMC NM MS	3	177		5700	Surface mounted	Central battery	Non-maintained	Manual
0041735	SylSafe Bay MB C EM3 NM MS	3	200		5700	Surface mounted	3 hours	Non-maintained	Manual
0041736	SylSafe Bay MB C EM3 NM DA	3	200		5700	Surface mounted	3 hours	Non-maintained	Autotest/DALI
0041737	SylSafe Bay MB C EMC NM MS	3	200		5700	Surface mounted	Central battery	Non-maintained	Manual
0041738	SylSafe Bay OA C EM3 NM MS	3	217		5700	Surface mounted	3 hours	Non-maintained	Manual
0041739	SylSafe Bay OA C EM3 NM DA	3	217		5700	Surface mounted	3 hours	Non-maintained	Autotest/DALI
0041740	SylSafe Bay OA C EMC NM MS	3	217		5700	Surface mounted	Central battery	Non-maintained	Manual
0041741	SylSafe Bay RT C EM3 NM MS	3	200		5700	Surface mounted	3 hours	Non-maintained	Manual
0041742	SylSafe Bay RT C EM3 NM DA	3	200		5700	Surface mounted	3 hours	Non-maintained	Autotest/DALI
0041743	SylSafe Bay RT C EMC NM MS	3	200		5700	Surface mounted	Central battery	Non-maintained	Manual
0041744	SylSafe Bay ST C EM3 NM MS	3	217		5700	Surface mounted	3 hours	Non-maintained	Manual
0041745	SylSafe Bay ST C EM3 NM DA	3	217		5700	Surface mounted	3 hours	Non-maintained	Autotest/DALI
0041746	SylSafe Bay ST C EMC NM MS	3	217		5700	Surface mounted	Central battery	Non-maintained	Manual

Product overview on page 59

Concord SylSafe Twin

Product information

Code	Description	Total system power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Mounting	Duration	Mode of Operation	Testing
0041769	SylSafe Twin TS C EM3 NM MS	3.23	400	124	5700	Surface mounted	3 hours	Non-maintained	Manual
0041770	SylSafe Twin TS C EM3 NM DA	3.23	400	124	5700	Surface mounted	3 hours	Non-maintained	Autotest/DALI
9193765	TWINLED 2x3W	6	-	-	5000	-	3 hours	-	-

Product overview on page 60

Concord RouteLED II

Product information

Code	Description	Total system power consumption (W)	Lumen output (lm)	Efficacy (lm/W)	Colour temperature (K)	Mounting	Duration	Mode of Operation
2059459	ROUTELED II OPEN AREA	2	219	110	5000	Recessed	3 hours	Non-Maintained
2059460	ROUTELED II CORRIDOR	2	212	106	5000	Recessed	4 hours	Non-Maintained
2059461	ROUTELED II OPEN AREA DALI	2	219	110	5000	Recessed	5 hours	Non-Maintained
2059463	ROUTELED II CORRIDOR DALI	2	212	106	5000	Recessed	6 hours	Non-Maintained

Accessories	
Code	Description
2059462	ROUTELED II SURFACE MOUNT ACCESSORY

Skyline Street

Product information

Code	Description	LED qty	System power (W)	System Lumen output (lm)	Efficacy (lm/W)	Light Distribution	Colour Temperature (K)	Electrical Safety Class	Voltage (V)	Lifetime (L90B50 @ 50°C)
Small										
0066600	Skyline Street S 1-5klm NW MR15 I 9022	24	49	5,624	115	MR15	4000 K	Class I	220 - 240V	100,000
0066601	Skyline Street S 1-5klm NW MR06 I 9022	24	49	5,547	113	MR06	4000 K	Class I	220 - 240V	100,000
0066602	Skyline Street S 1-5klm NW NR10 I 9022	24	49	5,869	120	NR10	4000 K	Class I	220 - 240V	100,000
0066618	Skyline Street S 1-5klm NW MR22 I 9022	24	49	6,115	125	MR22	4000 K	Class I	220 - 240V	100,000
0066624	Skyline Street S 1-5klm NW MR21 I 9022	24	49	5,984	122	MR21	4000 K	Class I	220 - 240V	100,000
0066627	Skyline Street S 1-5klm NW NR14 I 9022	24	49	6,030	123	NR14	4000 K	Class I	220 - 240V	100,000
0066609	Skyline Street S 1-5klm NW XR18 I 9022	24	49	4,902	100	XR18	4000 K	Class I	220 - 240V	100,000
0066612	Skyline Street S 1-5klm NW WR35 I 9022	24	49	5,748	117	WR35	4000 K	Class I	220 - 240V	100,000
0066621	Skyline Street S 1-5klm NW MR20 I 9022	24	49	5,731	117	MR20	4000 K	Class I	220 - 240V	100,000
Medium										
0066603	Skyline Street M 5-12klm NW MR15 I 9022	48	103	12,406	120	MR15	4000 K	Class I	220 - 240V	100,000
0066604	Skyline Street M 5-12klm NW MR06 I 9022	48	103	12,106	118	MR06	4000 K	Class I	220 - 240V	100,000
0066605	Skyline Street M 5-12klm NW NR10 I 9022	48	103	12,948	126	NR10	4000 K	Class I	220 - 240V	100,000
0066619	Skyline Street M 5-12klm NW MR22 I 9022	48	103	13,166	128	MR22	4000 K	Class I	220 - 240V	100,000
0066625	Skyline Street M 5-12klm NW MR21 I 9022	48	103	12,851	125	MR21	4000 K	Class I	220 - 240V	100,000
0066628	Skyline Street M 5-12klm NW NR14 I 9022	48	103	13,025	126	NR14	4000 K	Class I	220 - 240V	100,000
0066610	Skyline Street M 5-12klm NW XR18 I 9022	48	103	10,718	104	XR18	4000 K	Class I	220 - 240V	100,000
0066613	Skyline Street M 5-12klm NW WR35 I 9022	48	103	12,245	119	WR35	4000 K	Class I	220 - 240V	100,000
0066622	Skyline Street M 5-12klm NW MR20 I 9022	48	103	12,486	121	MR20	4000 K	Class I	220 - 240V	100,000
Large										
0066606	Skyline Street L 10-16klm NW MR15 I 9022	64	147	16,307	111	MR15	4000 K	Class I	220 - 240V	85,000
0066607	Skyline Street L 10-16klm NW MR06 I 9022	64	147	15,900	108	MR06	4000 K	Class I	220 - 240V	85,000
0066608	Skyline Street L 10-16klm NW NR10 I 9022	64	147	17,029	116	NR10	4000 K	Class I	220 - 240V	85,000
0066620	Skyline Street L 10-16klm NW MR22 I 9022	64	147	17,496	119	MR22	4000 K	Class I	220 - 240V	85,000
0066626	Skyline Street L 10-16klm NW MR21 I 9022	64	147	17,099	116	MR21	4000 K	Class I	220 - 240V	85,000
0066629	Skyline Street L 10-16klm NW NR14 I 9022	64	147	17,260	117	NR14	4000 K	Class I	220 - 240V	85,000
0066611	Skyline Street L 10-16klm NW XR18 I 9022	64	147	13,660	93	XR18	4000 K	Class I	220 - 240V	85,000
0066614	Skyline Street L 10-16klm NW WR35 I 9022	64	147	16,393	112	WR35	4000 K	Class I	220 - 240V	85,000
0066623	Skyline Street L 10-16klm NW MR20 I 9022	64	147	16,603	113	MR20	4000 K	Class I	220 - 240V	85,000

Product overview on page 61

Extra Large											
0066752	Skyline Street XL 17-30klm NW MR15 I 9022	112	244	30042	123	MR22	4000 K	Class I	220 - 240V	100,000	
0066751	Skyline Street XL 17-30klm NW MR06 I 9022	112	244	28554	117	MR06	4000 K	Class I	220 - 240V	100,000	
0066755	Skyline Street XL 17-30klm NW NR10 I 9022	112	244	30600	125	MR15	4000 K	Class I	220 - 240V	100,000	
0066759	Skyline Street XL 17-30klm NW XR18 I 9022	112	244	28134	115	MR20	4000 K	Class I	220 - 240V	100,000	
0066758	Skyline Street XL 17-30klm NW WR35 I 9022	112	244	30982	127	MR21	4000 K	Class I	220 - 240V	100,000	
0066750	Skyline Street XL 17-30klm NW MR22 I 9022	112	244	30262	124	NR10	4000 K	Class I	220 - 240V	100,000	
0066753	Skyline Street XL 17-30klm NW MR20 I 9022	112	244	30009	123	NR14	4000 K	Class I	220 - 240V	100,000	
0066754	Skyline Street XL 17-30klm NW MR21 I 9022	112	244	31238	128	NR17	4000 K	Class I	220 - 240V	100,000	
0066756	Skyline Street XL 17-30klm NW NR14 I 9022	112	244	30362	124	WR35	4000 K	Class I	220 - 240V	100,000	
0066757	Skyline Street XL 17-30klm NW NR17 I 9022	112	244	29921	123	XR18	4000 K	Class I	220 - 240V	100,000	

Skyline LED

Product information

Code	Description	Power Consumption (W)	Luminous Flux (lm)	Efficacy (lm/w)	Colour Temperature (K)	Voltage (V)	Electrical safety	Lifetime (h)
Medium								
0043561	Skyline LED 23K SYM White	158	22,978	145	4,000	220-240V	Class I	80,000
0043562	Skyline LED 18K ASYM White	120	17,765	148	4,000	220-240V	Class I	80,000
Mini								
0043565	Skyline LED Mini 10K SYM White	74	10,444	141	4,000	220-240V	Class I	76,000
0043566	Skyline LED Mini 6K ASYM White	47	6,208	132	4,000	220-240V	Class I	76,000

Product overview on page 63

